

Burnishing

contents

| | |
|-----------|---|
| 2 | OVERVIEW OF ROLLER BURNISHING |
| 7 | INTERNAL ROLLER BURNISHING TOOLS |
| 7 | SRMR/SRMB Series Roll-a-Finish® Tools |
| 17 | Bearingizing Tools |
| 22 | EXTERNAL ROLLER BURNISHING TOOLS |
| 22 | XBB Series Roll-a-Finish® Tools |
| 30 | ROLL-A-FINISH® TOOL SELECTION AND ORDERING |
| 31 | PART PREPARATION AND OPERATING PARAMETERS |
| 36 | SPECIAL APPLICATIONS AND TOOL DESIGNS |
| 38 | CX® EXTERNAL ROLLER BURNISHING MACHINES |
| 46 | SINGLE CONTACT BURNISHING TOOLS |
| 46 | Diamond Burnishing Tools |
| 50 | Universal™ Burnishing Tools |
| 64 | KB® KNURLING-BURNISHING PROCESS |
| 70 | BURNISHING APPLICATION DATA SHEET |

Roller burnishing overview

Cogsdill Roll-a-Finish tools offer you a fast, clean, and economical method of sizing and finishing metal parts to exacting specifications. The tools can be operated on any spindle. Parts of virtually any configuration and material are accurately sized within microns, with surface finishes as fine as 0.05 micrometers (2 microinches)... *in seconds!* An additional benefit: roller burnishing work hardens the part surface, producing a dense, compacted, wear-resistant surface for longer part life. Parts are improved, with faster production, and at a lower cost.



Burnishing TOOLS & MACHINES

Universal Burnishing Tools



Boring-Bar Style



Turning-Holder Style

Bearingizing Tools



CX[®] External Roller Burnishing Machines



External Roll-a-Finish[®] Tools



Internal Roll-a-Finish[®] Tools

We are pleased to offer the widest array of standard burnishing products in the industry, supported by the broadest range of experience in application engineering and custom tool design. Let us provide you with burnishing solutions to meet your sizing and finishing needs, with faster production and at a lower cost.



Diamond Burnishing Tools

COGSDILL-NUNEATON LTD.


Burnishing products shown here are *not* to scale.



➔ Roller burnishing is a surface finishing technique in which hardened, highly polished steel rollers are brought into pressure contact with a softer piece part. As the pressure generated through the rollers exceeds the yield point of the piece-part material, the surface is plastically deformed by cold flowing of sub-surface material. The result is a mirror-like finish and a tough, work-hardened surface with load-carrying characteristics which make the burnished surface superior to finishes obtained by abrasive metal-removal methods.

A roller burnished surface is smoother and more wear-resistant than an abraded surface of the same profilometer reading. Profilometers measure roughness height. Abrasive finishing processes remove metal by cutting or tearing it away, and while this usually lowers the roughness profile, it leaves sharp projections in the contact plane of the machined surface.

Roller burnishing displaces metal, rather than removing it. Material in microscopic “peaks” on the machined surface is caused to cold flow into the “valleys,” creating a plateau-like profile in which sharpness is reduced or eliminated in the contact plane. A burnished surface is therefore smoother than an abraded surface with the same roughness height measurement. The burnished surface will last longer under working conditions in contact with a mating part.

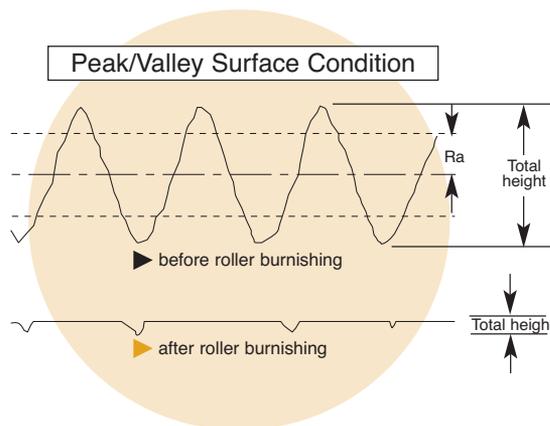


Process advantages and benefits of burnishing

There are *four primary benefits* of the roller burnishing process:

- 1 Improved surface finish – as fine as 0.05 to 0.1 micrometers (2 to 4 microinches) (Ra)
- 2 Improved size control – tolerances within .01mm (.0005 inch) or better
- 3 Increased surface hardness – up to 5 to 10% or more
- 4 Improved fatigue life – as much as 300% or better

Other benefits include:

- Reduced friction
- Reduced noise level
- Enhanced corrosion resistance
- Elimination of tool marks and minor surface imperfections
- Replaces expensive secondary operations, such as grinding, honing, or lapping
- Cleaner than honing or other abrasive operations
- Faster production, at a lower cost, as compared to other finishing processes – parts are sized, finished, and work-hardened... in seconds!

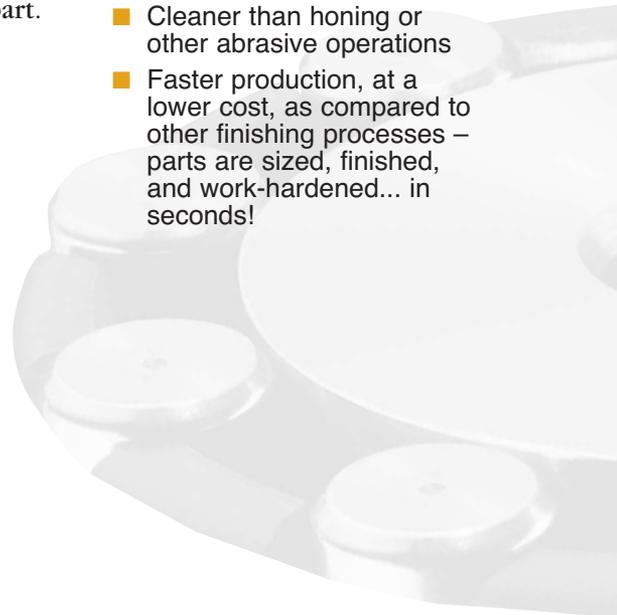

CX

external roller burnishing machines

Roll-a-Finish® tools for all types of part configurations

Cogsdill Roll-a-Finish tools are applied to a wide variety of part configurations, including:

- Inside diameters (holes)
- Outside diameters (shafts)
- Flat surfaces
- Tapers
- Spherical surfaces and contours
- Fillets (radii at shoulders)

Standard Roll-a-Finish tools are available from stock for inside diameters from 4,00 to 50,00mm (.157 to 1.968 inch). The tools are easily adjustable over a typical range of 1,00mm (.040 inch). Special designs are available for larger and smaller diameters, and for tapers, faces, contours, and virtually any part configuration.

Other Cogsdill burnishing tool products

In addition to Roll-a-Finish tools for IDs, ODs, and special part configurations, Cogsdill offers several other burnishing products and related items, including:


- *Bearingizing Tools*, for burnishing IDs in parts with thin walls or irregular wall thicknesses, or in applications where porosity retention or extremely close tolerances are required
- *CX® External Roller Burnishing Machines*, for sizing, finishing, and work-hardening cylindrical surfaces of any length
- *Diamond Burnishing Tools*, for generating mirror finishes on ODs, large IDs, or faces of virtually any diameter
- *Universal Burnishing Tools*, for burnishing ODs, large IDs, faces, tapers, contours, and irregular surfaces with a single roll
- *The KB Knurling-Burnishing Process*, for salvaging out-of-tolerance bores and shafts: a two-step process using Cogsdill knurling tools and Roll-a-Finish tools


burnishing tools
diamond

Knurling-Burnishing Process
KB

universal
burnishing
tools

bearingizing
tools

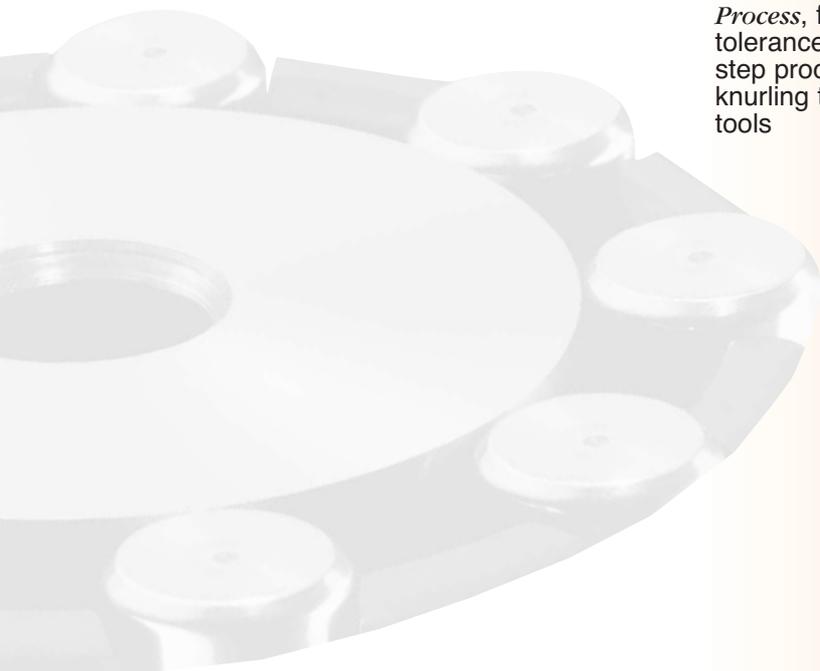

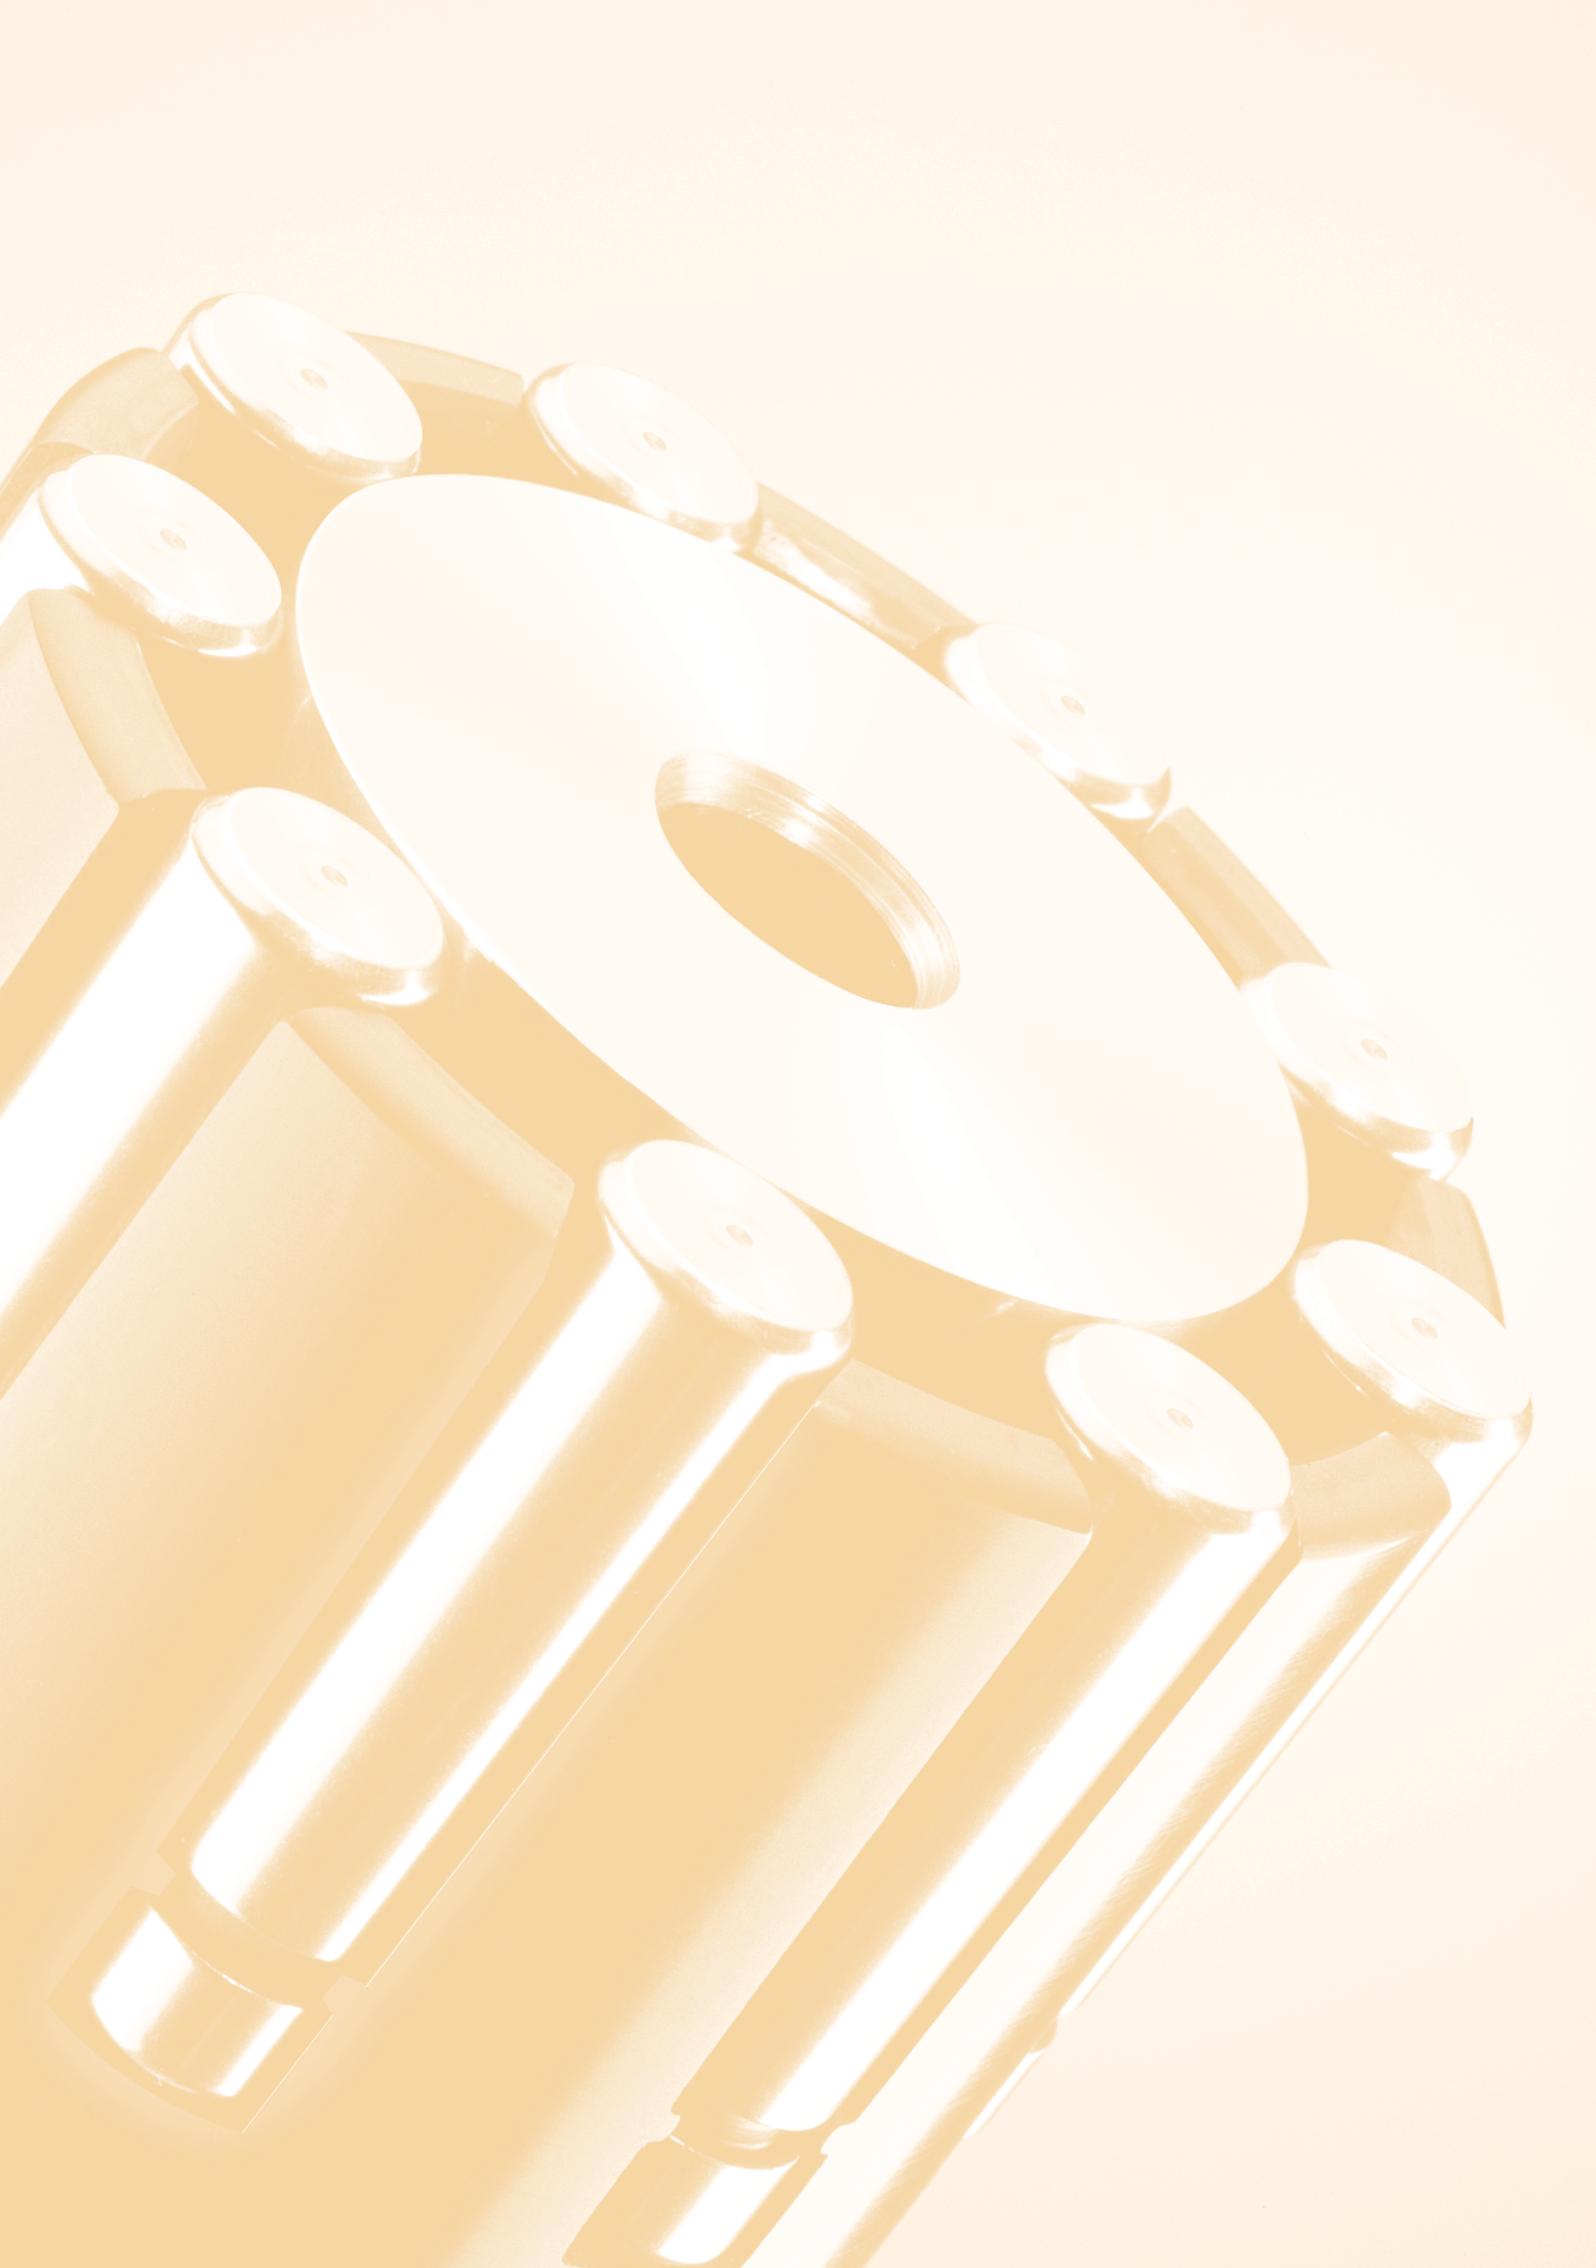

Internal Roll-a-Finish® tools

SRMR/SRMB series

Our premier line of internal Roll-a-Finish® tools, designed to suit all applications. Ideal for applications where tool length is restricted by tool changers, turrets, etc.



Offered in *three styles*:

- Through-hole style with no-helix cage (machine-feeding) as standard.
- Through-hole style with helix cage (self-feeding), made to order.
- Bottoming-style for blind hole, with no-helix cage (machine-feeding) as standard.




... with up to *three work lengths*:

- SRMR (B)
- SRMR (B)+50mm
- SRMR (B)+100mm
- Longer lengths available on request.

... and *available from stock*:

- for hole sizes from 4,00 to 50,00 mm (.157 to 1.968 inches).
- Tools are adjustable in increments of .002mm (.0001 inch).

Standard tool specifications

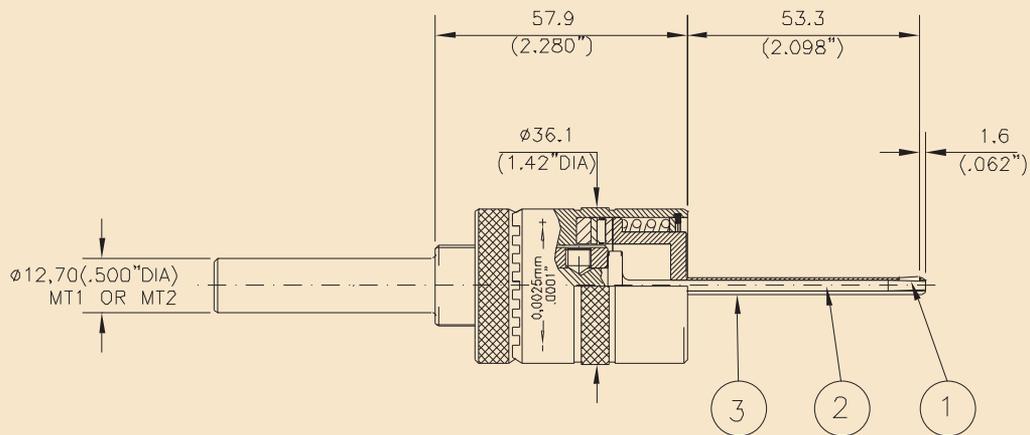

MAIN SPARES

- 1. ROLLS (3/TOOL)
- 2. MANDREL CONE
- 3. CAGE


SRMR SERIES ROLL-A-FINISH® TOOLS

4,0 to 5,75mm (.157" to .226")

| DIAMETER RANGE | | | | TOOL NUMBER | | |
|----------------|--------|------|--------|-------------------------|-------------------------|---------------------------------|
| MIN | | MAX | | THRO-HOLE (No Helix) | BOTTOMING (No Helix) | SELF-FEED OPTION (1½° Helix) |
| mm | Inches | mm | Inches | | | |
| 3,97 | .156 | 4,25 | .167 | SRMR 4 | - | - |
| 4,22 | .166 | 4,50 | .177 | SRMR 4,25 | - | - |
| 4,47 | .176 | 4,75 | .187 | SRMR 4,50 | - | - |
| 4,72 | .186 | 5,00 | .197 | SRMR 4,75 | - | - |
| 4,97 | .196 | 5,25 | .207 | SRMR 5 | - | Thro-Hole only |
| 5,22 | .206 | 5,50 | .217 | SRMR 5,25 | - | Thro-Hole only |
| 5,47 | .215 | 5,75 | .226 | SRMR 5,50 | - | Thro-Hole only |
| 5,72 | .225 | 6,00 | .236 | SRMR 5,75 | - | Thro-Hole only |

Tools other than shown above are available upon request.

Standard tool specifications

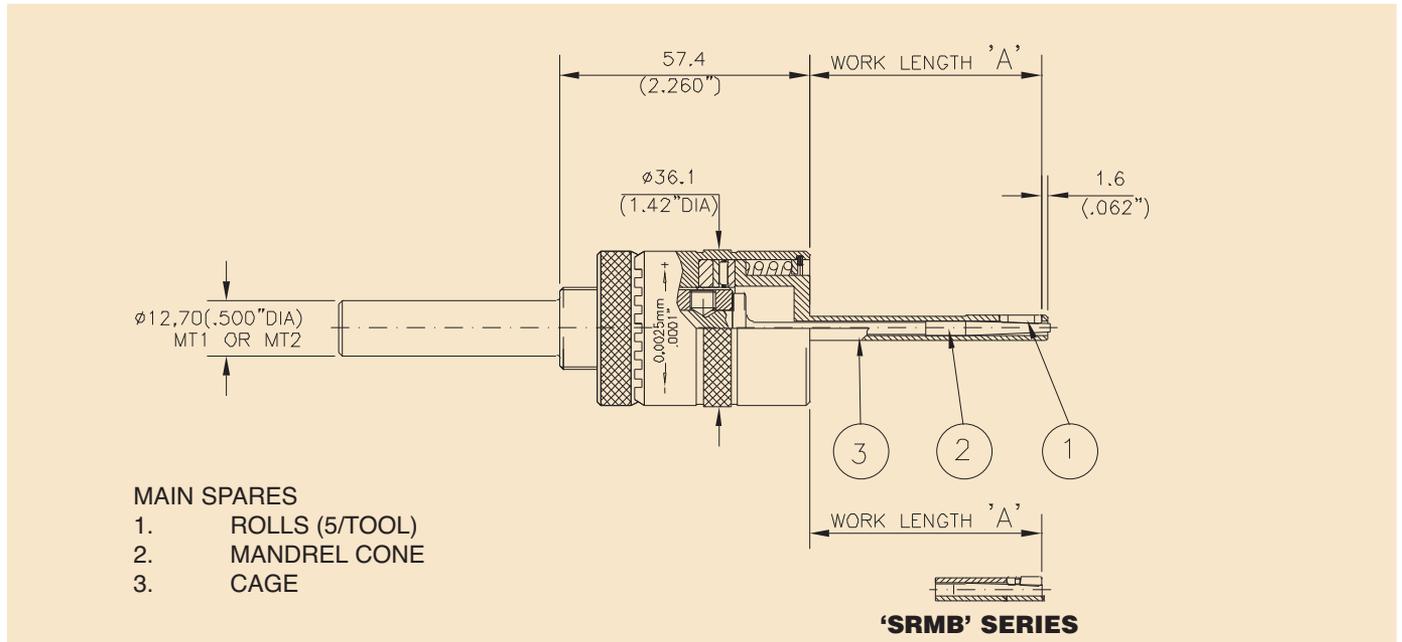

SRMR/SRMB SERIES ROLL-A-FINISH® TOOLS

6,0 to 12,5mm (.236" to .492")

| DIAMETER RANGE | | | | TOOL NUMBER | | | |
|----------------|--------|-------|--------|---------------------------------------|-------------------------|--|-------------------------|
| MIN | | MAX | | Standard Length 'A' = 53.3mm (2.098") | | Extended Length 'A' = 104.1mm (4.098") | |
| mm | Inches | mm | Inches | THRO-HOLE (No Helix) | BOTTOMING (No Helix) | THRO-HOLE (No Helix) | BOTTOMING (No Helix) |
| 5,95 | .234 | 6,50 | .256 | SRMR 6 | SRMB 6 | SRMR 6 + 50 | SRMB 6 + 50 |
| 6,45 | .254 | 7,00 | .276 | SRMR 6,50 | SRMB 6,50 | SRMR 6,50 + 50 | SRMB 6,50 + 50 |
| 6,95 | .274 | 7,50 | .295 | SRMR 7 | SRMB 7 | SRMR 7 + 50 | SRMB 7 + 50 |
| 7,45 | .293 | 8,00 | .315 | SRMR 7,50 | SRMB 7,50 | SRMR 7,50 + 50 | SRMB 7,50 + 50 |
| 7,95 | .313 | 8,50 | .335 | SRMR 8 | SRMB 8 | SRMR 8 + 50 | SRMB 8 + 50 |
| 8,45 | .333 | 9,00 | .354 | SRMR 8,50 | SRMB 8,50 | SRMR 8,50 + 50 | SRMB 8,50 + 50 |
| 8,95 | .352 | 9,50 | .374 | SRMR 9 | SRMB 9 | SRMR 9 + 50 | SRMB 9 + 50 |
| 9,45 | .372 | 10,00 | .394 | SRMR 9,50 | SRMB 9,50 | SRMR 9,50 + 50 | SRMB 9,50 + 50 |
| 9,95 | .392 | 10,50 | .413 | SRMR 10 | SRMB 10 | SRMR 10 + 50 | SRMB 10 + 50 |
| 10,45 | .411 | 11,00 | .433 | SRMR 10,50 | SRMB 10,50 | SRMR 10,50 + 50 | SRMB 10,50 + 50 |


Optional Self-Feeding 1/2° Helix Style Tools are Available for all Sizes, Styles and Lengths in this Range.

| DIAMETER RANGE | | | | TOOL NUMBER | | | | | |
|----------------|--------|-------|--------|---------------------------------------|-------------------------|--|-------------------------|-------------------------------------|-------------------------|
| MIN | | MAX | | Standard Length 'A' = 66.3mm (2.610") | | Extended Length 'A' = 117.1mm (4.610") | | Extra Length 'A' = 167.9mm (6.610") | |
| mm | Inches | mm | Inches | THRO-HOLE (No Helix) | BOTTOMING (No Helix) | THRO-HOLE (No Helix) | BOTTOMING (No Helix) | THRO-HOLE (No Helix) | BOTTOMING (No Helix) |
| 10,95 | .431 | 11,50 | .453 | SRMR 11 | SRMB 11 | SRMR 11 + 50 | SRMB 11 + 50 | SRMR 11 + 100 | SRMB 11 + 100 |
| 11,45 | .451 | 12,00 | .472 | SRMR 11,50 | SRMB 11,50 | SRMR 11,50 + 50 | SRMB 11,50 + 50 | SRMR 11,50 + 100 | SRMB 11,50 + 100 |
| 11,95 | .470 | 12,50 | .492 | SRMR 12 | SRMB 12 | SRMR 12 + 50 | SRMB 12 + 50 | SRMR 12 + 100 | SRMB 12 + 100 |
| 12,45 | .490 | 13,00 | .512 | SRMR 12,50 | SRMB 12,50 | SRMR 12,50 + 50 | SRMB 12,50 + 50 | SRMR 12,50 + 100 | SRMB 12,50 + 100 |

Optional Self-Feeding 1/2° Helix Style Tools are Available for all Sizes, Styles and Lengths in this Range.

When ordering Blind Bore Tools please state actual size to be burnished.
Tools other than shown above are available upon request.

Standard tool specifications

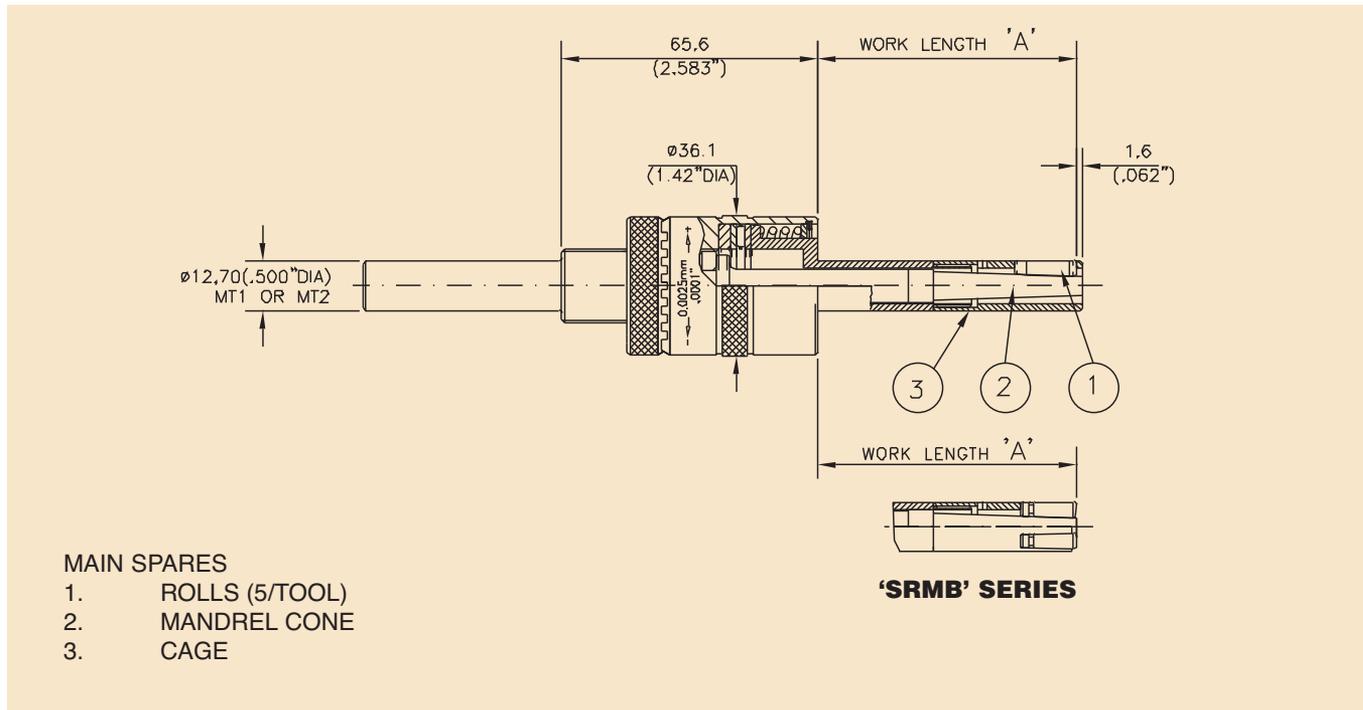

SRMR/SRMB SERIES ROLL-A-FINISH® TOOLS


13,0 to 24,0mm (.512" to .945")

| DIAMETER RANGE | | | | TOOL NUMBER | | | | | |
|----------------|--------|-------|--------|---------------------------------------|----------------------|--|----------------------|-------------------------------------|----------------------|
| MIN | | MAX | | Standard Length 'A' = 66.3mm (2.610") | | Extended Length 'A' = 117.1mm (4.610") | | Extra Length 'A' = 167.9mm (6.610") | |
| mm | Inches | mm | Inches | THRO-HOLE (No Helix) | BOTTOMING (No Helix) | THRO-HOLE (No Helix) | BOTTOMING (No Helix) | THRO-HOLE (No Helix) | BOTTOMING (No Helix) |
| 12,90 | .508 | 14,00 | .551 | SRMR 13 | SRMB 13 | SRMR 13 + 50 | SRMB 13 + 50 | SRMR 13 + 100 | SRMB 13 + 100 |
| 13,90 | .547 | 15,00 | .591 | SRMR 14 | SRMB 14 | SRMR 14 + 50 | SRMB 14 + 50 | SRMR 14 + 100 | SRMB 14 + 100 |
| 14,90 | .587 | 16,00 | .630 | SRMR 15 | SRMB 15 | SRMR 15 + 50 | SRMB 15 + 50 | SRMR 15 + 100 | SRMB 15 + 100 |
| 15,90 | .626 | 17,00 | .669 | SRMR 16 | SRMB 16 | SRMR 16 + 50 | SRMB 16 + 50 | SRMR 16 + 100 | SRMB 16 + 100 |
| 16,90 | .665 | 18,00 | .709 | SRMR 17 | SRMB 17 | SRMR 17 + 50 | SRMB 17 + 50 | SRMR 17 + 100 | SRMB 17 + 100 |
| 17,90 | .705 | 19,00 | .748 | SRMR 18 | SRMB 18 | SRMR 18 + 50 | SRMB 18 + 50 | SRMR 18 + 100 | SRMB 18 + 100 |
| 18,90 | .744 | 20,00 | .787 | SRMR 19 | SRMB 19 | SRMR 19 + 50 | SRMB 19 + 50 | SRMR 19 + 100 | SRMB 19 + 100 |
| 19,90 | .783 | 21,00 | .827 | SRMR 20 | SRMB 20 | SRMR 20 + 50 | SRMB 20 + 50 | SRMR 20 + 100 | SRMB 20 + 100 |
| 20,90 | .823 | 22,00 | .866 | SRMR 21 | SRMB 21 | SRMR 21 + 50 | SRMB 21 + 50 | SRMR 21 + 100 | SRMB 21 + 100 |
| 21,90 | .862 | 23,00 | .906 | SRMR 22 | SRMB 22 | SRMR 22 + 50 | SRMB 22 + 50 | SRMR 22 + 100 | SRMB 22 + 100 |
| 22,90 | .902 | 24,00 | .945 | SRMR23 | SRMB 23 | SRMR 23 + 50 | SRMB 23 + 50 | SRMR 23 + 100 | SRMB 23 + 100 |
| 23,90 | .941 | 25,00 | .984 | SRMR 24 | SRMB 24 | SRMR 24 + 50 | SRMB 24 + 50 | SRMR 24 + 100 | SRMB 24 + 100 |

Optional Self-Feeding 1/2" Helix Style Tools are Available for all Sizes, Styles and Lengths in this Range

*When ordering Blind Bore Tools please state actual size to be burnished.
Tools other than shown above are available upon request.*

Standard tool specifications

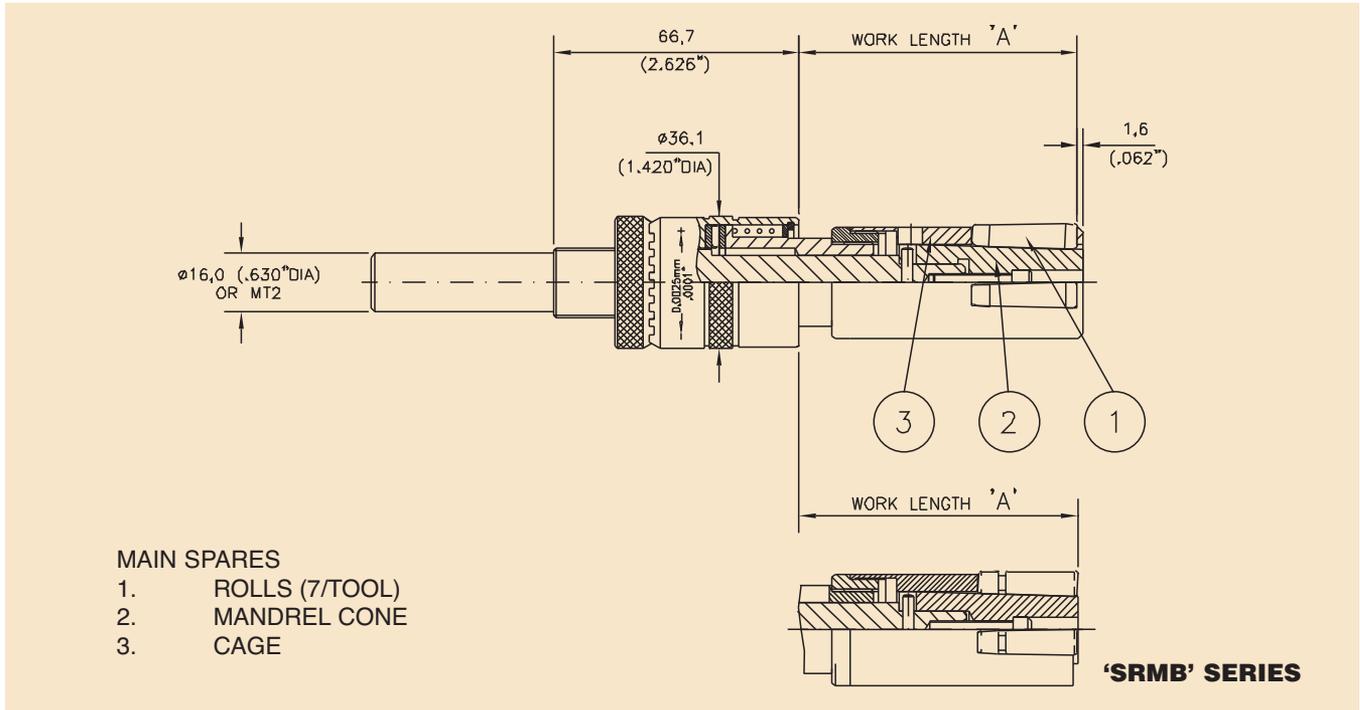

SRMR/SRMB SERIES ROLL-A-FINISH® TOOLS

25,0 to 50,0mm (.984" to 1.969")


| DIAMETER RANGE | | | | TOOL NUMBER | | | | | |
|----------------|--------|-------|--------|---------------------------------------|-------------------------|--|-------------------------|-------------------------------------|-------------------------|
| MIN | | MAX | | Standard Length 'A' = 75,7mm (2.980") | | Extended Length 'A' = 126,5mm (4.980") | | Extra Length 'A' = 177,3mm (6.980") | |
| mm | Inches | mm | Inches | THRO-HOLE (No Helix) | BOTTOMING (No Helix) | THRO-HOLE (No Helix) | BOTTOMING (No Helix) | THRO-HOLE (No Helix) | BOTTOMING (No Helix) |
| 24,90 | .980 | 26,00 | 1.024 | SRMR 25 | SRMB 25 | SRMR 25 + 50 | SRMB 25 + 50 | SRMR 25 + 100 | SRMB 25 + 100 |
| 25,90 | 1.020 | 27,00 | 1.063 | SRMR 26 | SRMB 26 | SRMR 26 + 50 | SRMB 26 + 50 | SRMR 26 + 100 | SRMB 26 + 100 |
| 26,90 | 1.059 | 28,00 | 1.102 | SRMR 27 | SRMB 27 | SRMR 27 + 50 | SRMB 27 + 50 | SRMR 27 + 100 | SRMB 27 + 100 |
| 27,90 | 1.098 | 29,00 | 1.142 | SRMR 28 | SRMB 28 | SRMR 28 + 50 | SRMB 28 + 50 | SRMR 28 + 100 | SRMB 28 + 100 |
| 28,90 | 1.138 | 30,00 | 1.181 | SRMR 29 | SRMB 29 | SRMR 29 + 50 | SRMB 29 + 50 | SRMR 29 + 100 | SRMB 29 + 100 |
| 29,90 | 1.177 | 31,00 | 1.220 | SRMR 30 | SRMB 30 | SRMR 30 + 50 | SRMB 30 + 50 | SRMR 30 + 100 | SRMB 30 + 100 |
| 30,90 | 1.217 | 32,00 | 1.260 | SRMR 31 | SRMB 31 | SRMR 31 + 50 | SRMB 31 + 50 | SRMR 31 + 100 | SRMB 31 + 100 |
| 31,90 | 1.256 | 33,00 | 1.300 | SRMR 32 | SRMB 32 | SRMR 32 + 50 | SRMB 32 + 50 | SRMR 32 + 100 | SRMB 32 + 100 |
| 32,90 | 1.295 | 34,00 | 1.339 | SRMR 33 | SRMB 33 | SRMR 33 + 50 | SRMB 33 + 50 | SRMR 33 + 100 | SRMB 33 + 100 |
| 33,90 | 1.335 | 35,00 | 1.378 | SRMR 34 | SRMB 34 | SRMR 34 + 50 | SRMB 34 + 50 | SRMR 34 + 100 | SRMB 34 + 100 |
| 34,90 | 1.374 | 36,00 | 1.417 | SRMR 35 | SRMB 35 | SRMR 35 + 50 | SRMB 35 + 50 | SRMR 35 + 100 | SRMB 35 + 100 |
| 35,90 | 1.413 | 37,00 | 1.457 | SRMR 36 | SRMB 36 | SRMR 36 + 50 | SRMB 36 + 50 | SRMR 36 + 100 | SRMB 36 + 100 |
| 36,90 | 1.453 | 38,00 | 1.496 | SRMR 37 | SRMB 37 | | | | |
| 37,90 | 1.492 | 39,00 | 1.535 | SRMR 38 | SRMB 38 | | | | |
| 38,90 | 1.531 | 40,00 | 1.574 | SRMR 39 | SRMB 39 | | | | |
| 39,90 | 1.571 | 41,00 | 1.614 | SRMR 40 | SRMB 40 | | | | |
| 40,90 | 1.610 | 42,00 | 1.654 | SRMR 41 | SRMB 41 | | | | |
| 41,90 | 1.649 | 43,00 | 1.693 | SRMR 42 | SRMB 42 | | | | |
| 42,90 | 1.689 | 44,00 | 1.732 | SRMR 43 | SRMB 43 | | | | |
| 43,90 | 1.728 | 45,00 | 1.772 | SRMR 44 | SRMB 44 | | | | |
| 44,90 | 1.768 | 46,00 | 1.811 | SRMR 45 | SRMB 45 | | | | |
| 45,90 | 1.807 | 47,00 | 1.850 | SRMR 46 | SRMB 46 | | | | |
| 46,90 | 1.846 | 48,00 | 1.890 | SRMR 47 | SRMB 47 | | | | |
| 47,90 | 1.886 | 49,00 | 1.929 | SRMR 48 | SRMB 48 | | | | |
| 48,90 | 1.925 | 50,00 | 1.968 | SRMR 49 | SRMB 49 | | | | |
| 49,90 | 1.964 | 51,00 | 2.008 | SRMR 50 | SRMB 50 | | | | |

ON COMPONENT BORES MORE THAN 36MM, INFINITE LENGTHS CAN BE BURNISHED BY ADDING SHANK ADAPTORS

Optional Self-Feeding 1 1/2° Helix Style Tools are Available for all Sizes, Styles and Lengths in this Range

When ordering Blind Bore Tools please state actual size to be burnished.
Tools other than shown above are available upon request.

Standard tool specifications

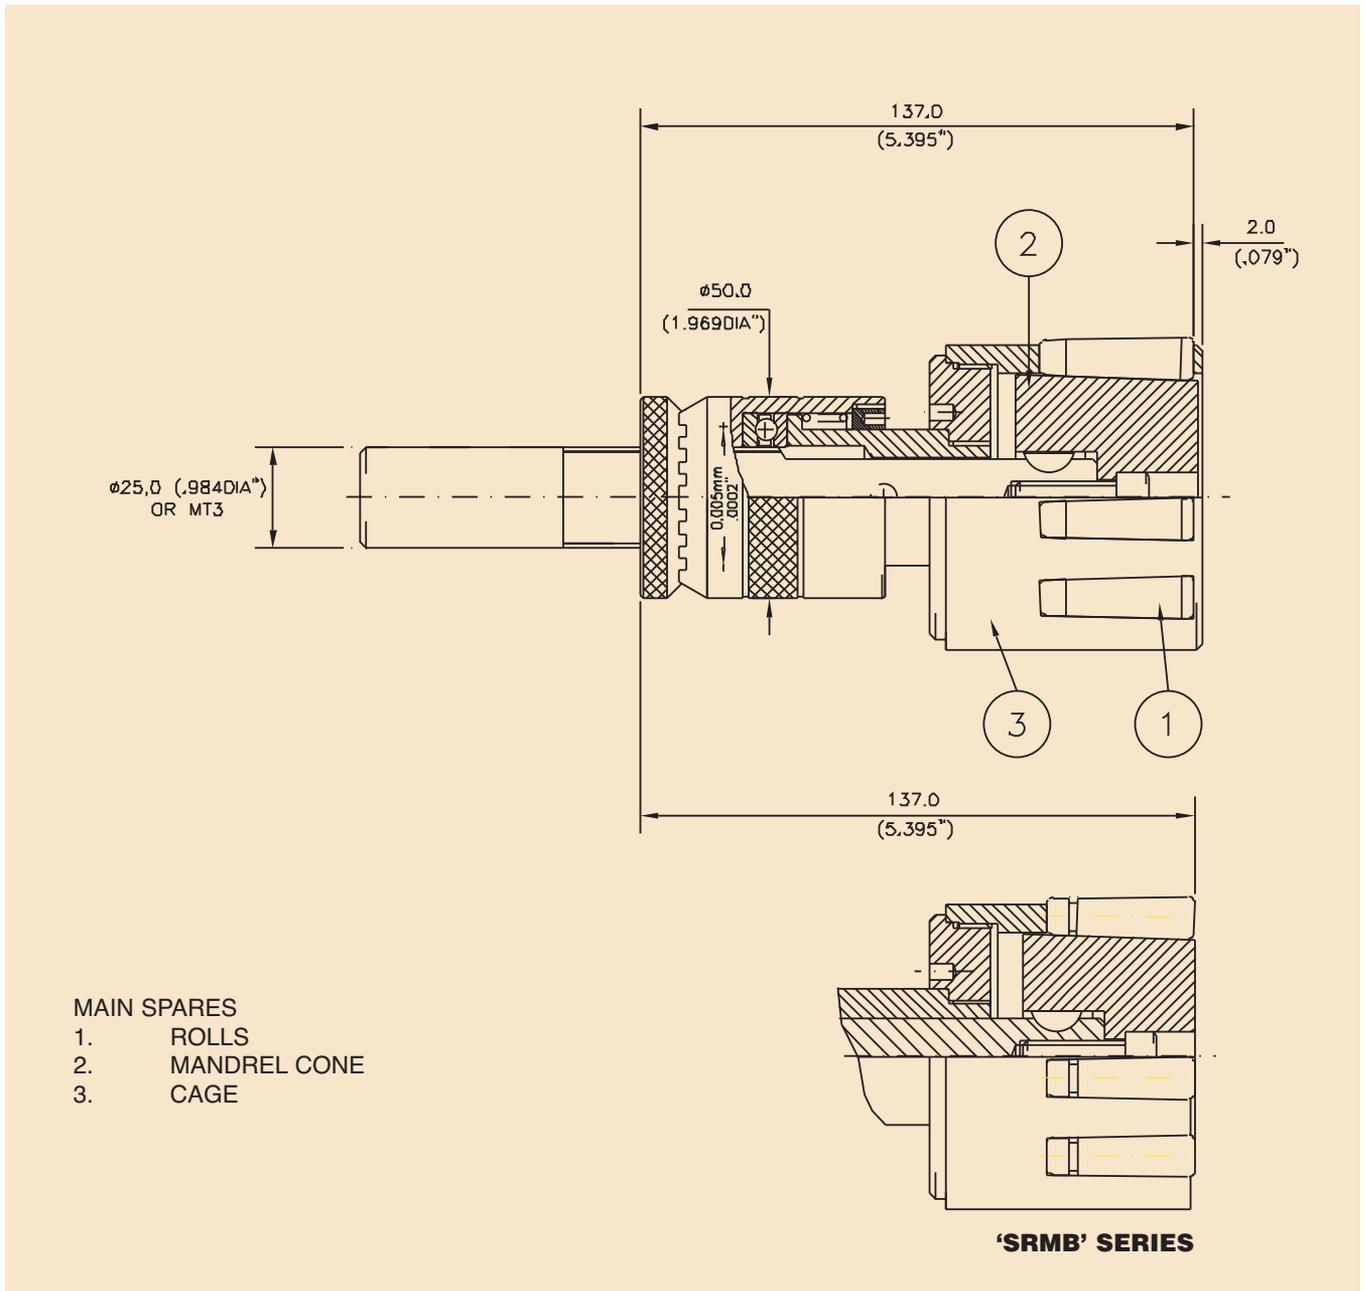

SRMR/SRMB SERIES ROLL-A-FINISH® TOOLS

51,0 to 89,0mm (2.008" to 3.504")

SEE NEXT PAGE FOR CHART

*When ordering Blind Bore Tools please state actual size to be burnished.
Tools other than shown above are available upon request.*

Standard tool specifications


SRMR/SRMB SERIES ROLL-A-FINISH® TOOLS

51,0 to 89,0mm (2.008" to 3.504")

| DIAMETER RANGE | | | | TOOL NUMBER | |
|----------------|--------|-------|--------|---|-------------------------|
| MIN | | MAX | | (UNLIMITED WORKING LENGTH USING SHANK EXTENSIONS) | |
| mm | Inches | mm | Inches | THRO-HOLE (No Helix) | BOTTOMING (No Helix) |
| 50,90 | 2.004 | 52,00 | 2.047 | SRMR 51 | SRMB 51 |
| 51,90 | 2.043 | 53,00 | 2.087 | SRMR 52 | SRMB 52 |
| 52,90 | 2.083 | 54,00 | 2.126 | SRMR 53 | SRMB 53 |
| 53,90 | 2.122 | 55,00 | 2.165 | SRMR 54 | SRMB 54 |
| 54,90 | 2.161 | 56,00 | 2.205 | SRMR 55 | SRMB 55 |
| 55,90 | 2.201 | 57,00 | 2.244 | SRMR 56 | SRMB 56 |
| 56,90 | 2.240 | 58,00 | 2.283 | SRMR 57 | SRMB 57 |
| 57,90 | 2.280 | 59,00 | 2.323 | SRMR 58 | SRMB 58 |
| 58,90 | 2.319 | 60,00 | 2.362 | SRMR 59 | SRMB 59 |
| 59,90 | 2.358 | 61,00 | 2.402 | SRMR 60 | SRMB 60 |
| 60,90 | 2.398 | 62,00 | 2.441 | SRMR 61 | SRMB 61 |
| 61,90 | 2.437 | 63,00 | 2.480 | SRMR 62 | SRMB 62 |
| 62,90 | 2.476 | 64,00 | 2.520 | SRMR 63 | SRMB 63 |
| 63,90 | 2.516 | 65,00 | 2.559 | SRMR 64 | SRMB 64 |
| 64,90 | 2.555 | 66,00 | 2.598 | SRMR 65 | SRMB 65 |
| 65,90 | 2.594 | 67,00 | 2.638 | SRMR 66 | SRMB 66 |
| 66,90 | 2.634 | 68,00 | 2.677 | SRMR 67 | SRMB 67 |
| 67,90 | 2.673 | 69,00 | 2.717 | SRMR 68 | SRMB 68 |
| 68,90 | 2.713 | 70,00 | 2.756 | SRMR 69 | SRMB 69 |
| 69,90 | 2.752 | 71,00 | 2.795 | SRMR 70 | SRMB 70 |
| 70,90 | 2.791 | 72,00 | 2.835 | SRMR 71 | SRMB 71 |
| 71,90 | 2.831 | 73,00 | 2.874 | SRMR 72 | SRMB 72 |
| 72,90 | 2.870 | 74,00 | 2.913 | SRMR 73 | SRMB 73 |
| 73,90 | 2.909 | 75,00 | 2.953 | SRMR 74 | SRMR 74 |
| 74,90 | 2.949 | 76,00 | 2.992 | SRMR 75 | SRMB 75 |
| 75,90 | 2.988 | 77,00 | 3.031 | SRMR 76 | SRMB 76 |
| 76,90 | 3.028 | 78,00 | 3.071 | SRMR 77 | SRMB 77 |
| 77,90 | 3.067 | 79,00 | 3.110 | SRMR 78 | SRMB 78 |
| 78,90 | 3.106 | 80,00 | 3.150 | SRMR 79 | SRMB 79 |
| 79,90 | 3.146 | 81,00 | 3.189 | SRMR 80 | SRMB 80 |
| 80,90 | 3.185 | 82,00 | 3.228 | SRMR 81 | SRMB 81 |
| 81,90 | 3.224 | 83,00 | 3.268 | SRMR 82 | SRMB 82 |
| 82,90 | 3.264 | 84,00 | 3.307 | SRMR 83 | SRMB 83 |
| 83,90 | 3.303 | 85,00 | 3.346 | SRMR 84 | SRMB 84 |
| 84,90 | 3.343 | 86,00 | 3.386 | SRMR 85 | SRMB 85 |
| 85,90 | 3.382 | 87,00 | 3.425 | SRMR 86 | SRMB 86 |
| 86,90 | 3.421 | 88,00 | 3.465 | SRMR 87 | SRMB 87 |
| 87,90 | 3.461 | 89,00 | 3.504 | SRMR 88 | SRMB 88 |
| 88,90 | 3.500 | 90,00 | 3.543 | SRMR 89 | SRMB 89 |

Optional Self-Feeding 1 1/2° Helix Style Tools are Available for all Sizes and Styles in this Range

Standard tool specifications

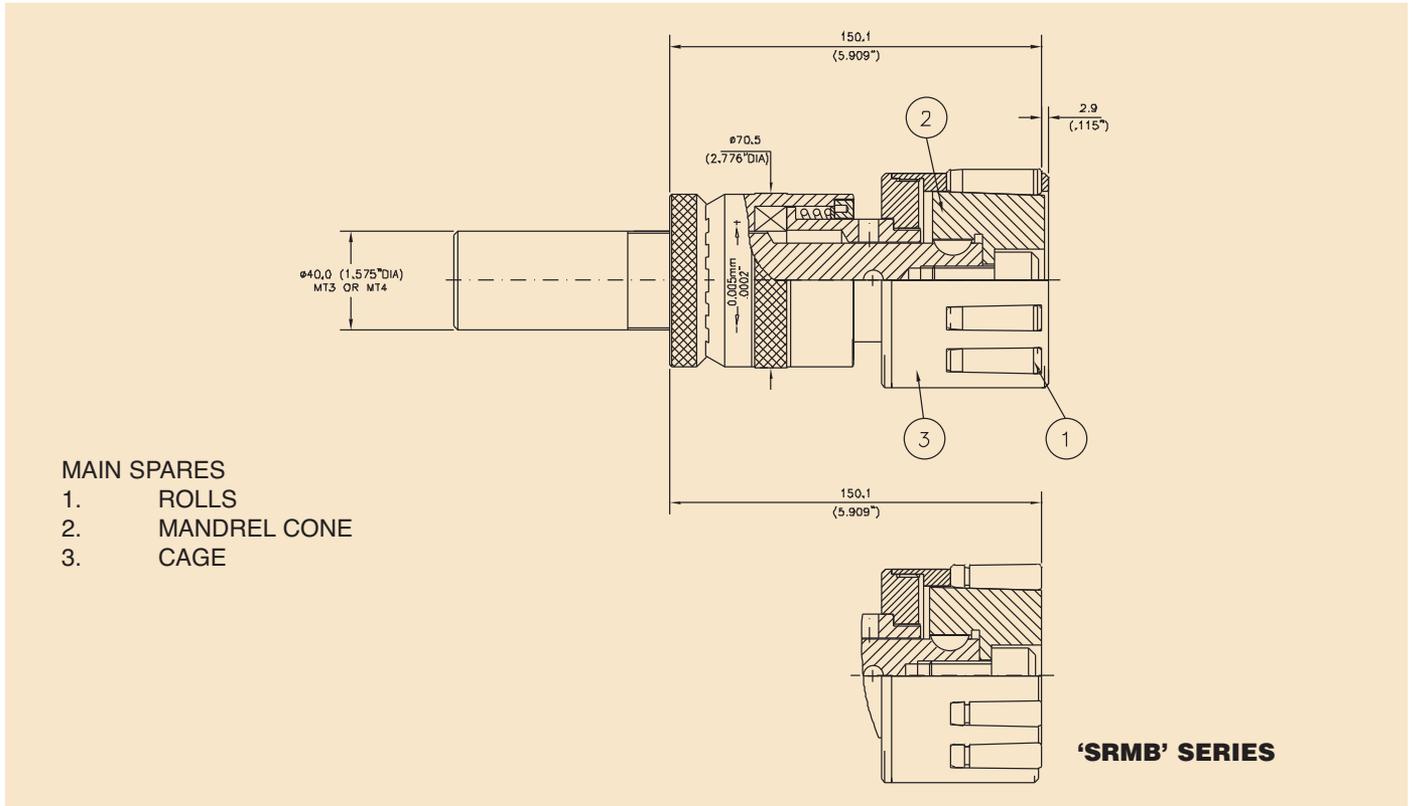

SRMR/SRMB SERIES ROLL-A-FINISH® TOOLS 90,0 to 177,0 mm (3.543" to 6.969")

| DIAMETER RANGE | | | | TOOL NUMBER | |
|----------------|--------|--------|--------|---|-------------------------|
| MIN | | MAX | | (UNLIMITED WORKING LENGTH USING SHANK EXTENSIONS) | |
| mm | Inches | mm | Inches | THRO-HOLE (No Helix) | BOTTOMING (No Helix) |
| 89,90 | 3.539 | 91,00 | 3.583 | SRMR 90 | SRMB 90 |
| 90,90 | 3.579 | 92,00 | 3.622 | SRMR 91 | SRMB 91 |
| 91,90 | 3.618 | 93,00 | 3.661 | SRMR 92 | SRMB 92 |
| 92,90 | 3.657 | 94,00 | 3.701 | SRMR 93 | SRMB 93 |
| 93,90 | 3.697 | 95,00 | 3.740 | SRMR 94 | SRMB 94 |
| 94,90 | 3.736 | 96,00 | 3.780 | SRMR 95 | SRMB 95 |
| 95,90 | 3.776 | 97,00 | 3.819 | SRMR 96 | SRMB 96 |
| 96,90 | 3.815 | 98,00 | 3.858 | SRMR 97 | SRMB 97 |
| 97,90 | 3.854 | 99,00 | 3.898 | SRMR 98 | SRMB 98 |
| 98,90 | 3.894 | 100,00 | 3.937 | SRMR 99 | SRMB 99 |
| 99,90 | 3.933 | 101,00 | 3.976 | SRMR 100 | SRMB 100 |
| 100,90 | 3.972 | 102,00 | 4.016 | SRMR 101 | SRMB 101 |
| 101,90 | 4.012 | 103,00 | 4.055 | SRMR 102 | SRMB 102 |
| 102,90 | 4.052 | 104,00 | 4.094 | SRMR 103 | SRMB 103 |
| 103,90 | 4.091 | 105,00 | 4.134 | SRMR 104 | SRMB 104 |
| 104,90 | 4.130 | 106,00 | 4.173 | SRMR 105 | SRMB 105 |
| 105,90 | 4.169 | 107,00 | 4.213 | SRMR 106 | SRMB 106 |
| 106,90 | 4.209 | 108,00 | 4.252 | SRMR 107 | SRMB 107 |
| 107,90 | 4.248 | 109,00 | 4.291 | SRMR 108 | SRMB 108 |
| 108,90 | 4.287 | 110,00 | 4.331 | SRMR 109 | SRMB 109 |
| 109,90 | 4.327 | 111,00 | 4.370 | SRMR 110 | SRMB 110 |
| 110,90 | 4.366 | 112,00 | 4.409 | SRMR 111 | SRMB 111 |
| 111,90 | 4.406 | 113,00 | 4.449 | SRMR 112 | SRMB 112 |
| 112,90 | 4.445 | 114,00 | 4.488 | SRMR 113 | SRMB 113 |

Optional Self-Feeding 1 1/2° Helix Style Tools are Available for all Sizes and Styles in this Range

*When ordering Blind Bore Tools please state actual size to be burnished.
Tools other than shown above are available upon request.*


| DIAMETER RANGE | | | | TOOL NUMBER | |
|----------------|--------|--------|--------|---|-------------------------|
| MIN | | MAX | | (UNLIMITED WORKING LENGTH USING SHANK EXTENSIONS) | |
| mm | Inches | mm | Inches | THRO-HOLE (No Helix) | BOTTOMING (No Helix) |
| 113,90 | 4.484 | 115,00 | 4.528 | SRMR 114 | SRMB 114 |
| 114,90 | 4.524 | 116,00 | 4.567 | SRMR 115 | SRMB 115 |
| 115,90 | 4.563 | 117,00 | 4.606 | SRMR 116 | SRMB 116 |
| 116,90 | 4.602 | 118,00 | 4.646 | SRMR 117 | SRMB 117 |
| 117,90 | 4.642 | 119,00 | 4.685 | SRMR 118 | SRMB 118 |
| 118,90 | 4.681 | 120,00 | 4.724 | SRMR 119 | SRMB 119 |
| 119,90 | 4.720 | 121,00 | 4.764 | SRMR 120 | SRMB 120 |
| 120,90 | 4.760 | 122,00 | 4.803 | SRMR 121 | SRMB 121 |
| 121,90 | 4.799 | 123,00 | 4.843 | SRMR 122 | SRMB 122 |
| 122,90 | 4.839 | 124,00 | 4.882 | SRMR 123 | SRMB 123 |
| 123,90 | 4.878 | 125,00 | 4.921 | SRMR 124 | SRMB 124 |
| 124,90 | 4.917 | 126,00 | 4.961 | SRMR 125 | SRMB 125 |
| 125,90 | 4.957 | 127,00 | 5.000 | SRMR 126 | SRMB 126 |
| 126,90 | 4.996 | 128,00 | 5.039 | SRMR 127 | SRMB 127 |
| 127,90 | 5.035 | 129,00 | 5.079 | SRMR 128 | SRMB 128 |
| 128,90 | 5.075 | 130,00 | 5.118 | SRMR 129 | SRMB 129 |
| 129,90 | 5.114 | 131,00 | 5.157 | SRMR 130 | SRMB 130 |
| 130,90 | 5.154 | 132,00 | 5.197 | SRMR 131 | SRMB 131 |
| 131,90 | 5.193 | 133,00 | 5.236 | SRMR 132 | SRMB 132 |
| 132,90 | 5.232 | 134,00 | 5.276 | SRMR 133 | SRMB 133 |
| 133,90 | 5.272 | 135,00 | 5.315 | SRMR 134 | SRMB 134 |
| 134,90 | 5.311 | 136,00 | 5.354 | SRMR 135 | SRMB 135 |
| 135,90 | 5.350 | 137,00 | 5.394 | SRMR 136 | SRMB 136 |
| 136,90 | 5.390 | 138,00 | 5.433 | SRMR 137 | SRMB 137 |
| 137,90 | 5.429 | 139,00 | 5.472 | SRMR 138 | SRMB 138 |
| 138,90 | 5.469 | 140,00 | 5.512 | SRMR 139 | SRMB 139 |
| 139,90 | 5.508 | 141,00 | 5.551 | SRMR 140 | SRMB 140 |
| 140,90 | 5.547 | 142,00 | 5.591 | SRMR 141 | SRMB 141 |
| 141,90 | 5.587 | 143,00 | 5.630 | SRMR 142 | SRMB 142 |
| 142,90 | 5.626 | 144,00 | 5.669 | SRMR 143 | SRMB 143 |
| 143,90 | 5.665 | 145,00 | 5.709 | SRMR 144 | SRMB 144 |
| 144,90 | 5.705 | 146,00 | 5.748 | SRMR 145 | SRMB 145 |
| 145,90 | 5.744 | 147,00 | 5.787 | SRMR 146 | SRMB 146 |
| 146,90 | 5.783 | 148,00 | 5.827 | SRMR 147 | SRMB 147 |
| 147,90 | 5.823 | 149,00 | 5.866 | SRMR 148 | SRMB 148 |
| 148,90 | 5.862 | 150,00 | 5.906 | SRMR 149 | SRMB 149 |
| 149,90 | 5.902 | 151,00 | 5.945 | SRMR 150 | SRMB 150 |
| 150,90 | 5.941 | 152,00 | 5.984 | SRMR 151 | SRMB 151 |
| 151,90 | 5.980 | 153,00 | 6.024 | SRMR 152 | SRMB 152 |
| 152,90 | 6.020 | 154,00 | 6.063 | SRMR 153 | SRMB 153 |
| 153,90 | 6.059 | 155,00 | 6.102 | SRMR 154 | SRMB 154 |
| 154,90 | 6.098 | 156,00 | 6.142 | SRMR 155 | SRMB 155 |
| 155,90 | 6.138 | 157,00 | 6.181 | SRMR 156 | SRMB 156 |
| 156,90 | 6.177 | 158,00 | 6.220 | SRMR 157 | SRMB 157 |
| 157,90 | 6.217 | 159,00 | 6.260 | SRMR 158 | SRMB 158 |
| 158,90 | 6.256 | 160,00 | 6.299 | SRMR 159 | SRMB 159 |
| 159,90 | 6.295 | 161,00 | 6.339 | SRMR 160 | SRMB 160 |
| 160,90 | 6.335 | 162,00 | 6.378 | SRMR 161 | SRMB 161 |
| 161,90 | 6.374 | 163,00 | 6.417 | SRMR 162 | SRMB 162 |
| 162,90 | 6.413 | 164,00 | 6.457 | SRMR 163 | SRMB 163 |
| 163,90 | 6.453 | 165,00 | 6.496 | SRMR 164 | SRMB 164 |
| 164,90 | 6.492 | 166,00 | 6.535 | SRMR 165 | SRMB 165 |
| 165,90 | 6.531 | 167,00 | 6.575 | SRMR 166 | SRMB 166 |
| 166,90 | 6.571 | 168,00 | 6.614 | SRMR 167 | SRMB 167 |
| 167,90 | 6.610 | 169,00 | 6.654 | SRMR 168 | SRMB 168 |
| 168,90 | 6.650 | 170,00 | 6.693 | SRMR 169 | SRMB 169 |
| 169,90 | 6.690 | 171,00 | 6.732 | SRMR 170 | SRMB 170 |
| 170,90 | 6.728 | 172,00 | 6.772 | SRMR 171 | SRMB 171 |
| 171,90 | 6.768 | 173,00 | 6.811 | SRMR 172 | SRMB 172 |
| 172,90 | 6.807 | 174,00 | 6.850 | SRMR 173 | SRMB 173 |
| 173,90 | 6.846 | 175,00 | 6.890 | SRMR 174 | SRMB 174 |
| 174,90 | 6.886 | 176,00 | 6.929 | SRMR 175 | SRMB 175 |
| 175,90 | 6.925 | 177,00 | 6.969 | SRMR 176 | SRMB 176 |
| 176,90 | 6.965 | 178,00 | 7.008 | SRMR 177 | SRMB 177 |

Optional Self-Feeding 1 $\frac{1}{2}$ ° Helix Style Tools are Available for all Sizes and Styles in this Range

ROLLS

| INTERNAL ROLLER BURNISHING ROLL CHART | | | | | |
|---------------------------------------|---|-------|-------------|-----------|------------|
| TOOL NUMBER | | | ROLL NUMBER | | QTY / TOOL |
| (FROM | - | TO) | THRO-HOLE | BOTTOMING | |
| SRM 4 | - | 4,75 | RR137 | - | 3 |
| SRM 5 | - | 5,75 | SR187 | - | 3 |
| SRMR 6 | - | 7,50 | R250 | B250 | 5 |
| SRMR 8 | - | 9 | R312 | B312 | 5 |
| SRMR 9,50 | - | 10,50 | R375 | B375 | 5 |
| SRMR 11 | - | 12,50 | R437 | B437 | 5 |
| SRMR 13 | - | 17 | R500 | B500 | 5 |
| SRMR 18 | - | 24 | R750 | B750 | 5 |
| SRMR 25 | - | 29 | R750 | B750 | 7 |
| SRMR 30 | - | 35 | R875 | B875 | 7 |
| SRMR 36 | - | 41 | R1125 | B1125 | 7 |
| SRMR 42 | - | 50 | R1625 | B1625 | 7 |
| SRMR 51 | - | 69 | R1625 | B1625 | 9 |
| SRMR 70 | - | 89 | R1625 | B1625 | 11 |
| SRMR 90 | - | 110 | R1625 | B1625 | 13 |
| SRMR 111 | - | 135 | R1625 | B1625 | 15 |
| SRMR 136 | - | 155 | R1625 | B1625 | 17 |
| SRMR 156 | - | 177 | R1625 | B1625 | 19 |

Bearingizing tools

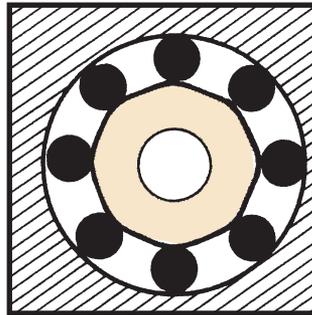

The Bearingizing Tool combines roller burnishing with peening action. As the tool is rotated at a high speed the rolls spin, rise, and fall over a cammed arbor; delivering up to 200,000 rapid fire blows per minute to the work surface. The peaks and valleys of the machined surface are compacted into a smooth, hardened, and ultrafine surface finish.

The Bearingizer *may* be the tool of choice where the following conditions exist:

- Parts with *thin walls* — Bearingizing eliminates barrel-shaping of the part.
- Parts with *irregular wall thicknesses* — the Bearingizing tool will produce a very round hole, whereas the Roll-a-Finish® tool might generate a slightly egg-shaped hole, due to variations in wall thickness.
- Applications where *porosity* is an issue (e.g., oil-impregnated bearings) — the smaller “footprint” of the Bearingizing roll leaves pores in the surface intact.
- Applications where *very tight tolerances* must be held — the Bearingizer reduces springback in the work surface material. The Bearingizing tool can, in some materials and with proper part preparation, hold size as close as $\pm .0001$ inch (.002mm), while the Roll-a-Finish tool can achieve tolerances of $\pm .00025$ inch (.006mm).

Where the above conditions do *not* exist, the Roll-a-Finish® tool would generally be the tool of choice, for two reasons:

- (1) the relatively wide adjustment range of the Roll-a-Finish tool, which is typically .040 inch (1.01mm), and
- (2) the ease of adjustment, with the castellated adjusting collar on the Roll-a-Finish tool.

The Bearingizing tool features a greater number of rolls, and rolls of a smaller diameter, as compared to the Roll-a-Finish tool, and can only be adjusted by change of rolls. The Bearingizer also requires a closer presize than the Roll-a-Finish tool.

But where the above conditions *do* exist, the Bearingizing tool should be considered.

While the Roll-a-Finish Tool increases surface hardness by about 5 to 10%, Bearingizing increases hardness by 10 to 30%, but with less surface penetration.




Tool specifications

Bearingizing tools provide three roll positions over the cammed arbor (see below). When the forward (#1 position) of cam becomes worn, the roll cage can be repositioned to the # 2 and # 3 positions by exchanging positions with the moveable collars. This presents NEW cam surfaces and original BUILD-UP. After all positions

on the cam are worn beyond producing acceptable parts, oversize rolls can be used to further extend tool life. Roll sizes are available in increments of .0001 inch (.0025 mm) and the tool will accommodate a range of roll sizes up to .002 inch (.0508 mm).

For through-hole, semi-bottoming, or bottoming applications.

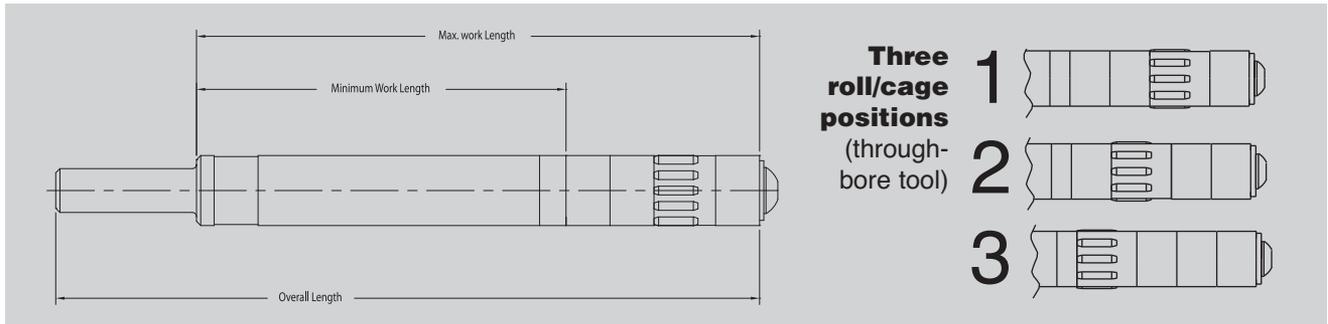

Bearingizing Tools .188 to 1.250 in. (4.76 to 31.75mm)

| NOMINAL TOOL SIZE | | BUILD-UP RANGE | | CAM DIAMETER | | SHANK | OVERALL LENGTH | | WORK LENGTH | | | | NO. OF ROLLS | |
|-------------------|-------|----------------|------------------|--------------|-------|-------|------------------|-------|-------------|--------|---------|-------|--------------|---|
| INCHES | MM | INCHES | MM | INCHES | MM | | INCHES | MM | MAXIMUM | | MINIMUM | | | |
| | | | | | | | | | INCHES | MM | INCHES | MM | | |
| .188 | 4.76 | .1861 .1901 | 4.727 4.829 | .1281 | 3.254 | ↑ | 5.5 | 139.7 | 2.938 | 74.61 | 2.188 | 55.56 | 6 | |
| .219 | 5.56 | .2174 .2214 | 5.522 5.624 | .1594 | 4.049 | | 5.5 | 139.7 | 2.938 | 74.61 | 2.188 | 55.56 | 6 | |
| .236 | 6 | .2343 .2383 | 5.951 6.053 | .1670 | 4.242 | | 6 | 152.4 | 3.438 | 87.31 | 2.375 | 60.32 | 6 | |
| .250 | 6.35 | .2486 .2526 | 6.314 6.416 | .1806 | 4.587 | | 6 | 152.4 | 3.438 | 87.31 | 2.375 | 60.32 | 6 | |
| .276 | 7 | .2743 .2783 | 6.967 7.069 | .2064 | 5.243 | | 6 | 152.4 | 3.438 | 87.31 | 2.313 | 58.74 | 6 | |
| .281 | 7.14 | .2799 .2839 | 7.109 7.211 | .2119 | 5.382 | | 6 | 152.4 | 3.438 | 87.31 | 2.313 | 58.74 | 6 | |
| .313 | 7.94 | .3112 .3152 | 7.904 8.006 | .2212 | 5.618 | | 6 | 152.4 | 3.438 | 87.31 | 2.313 | 58.74 | 6 | |
| .315 | 8 | .3137 .3177 | 7.968 8.069 | .2238 | 5.667 | | .500 in. DIA. | 6 | 152.4 | 3.438 | 87.31 | 2.313 | 58.74 | 6 |
| .343 | 8.73 | .3425 .3465 | 8.700 8.801 | .2525 | 6.414 | | or | 7 | 177.8 | 4.438 | 112.71 | 3.063 | 77.79 | 6 |
| .354 | 9 | .3530 .3570 | 8.966 9.068 | .2631 | 6.683 | | 12mm DIA. | 7 | 177.8 | 4.438 | 112.71 | 3.063 | 77.79 | 6 |
| .375 | 9.53 | .3738 .3778 | 9.495 9.596 | .2518 | 6.396 | | 7 | 177.8 | 4.438 | 112.71 | 3.125 | 79.38 | 6 | |
| .394 | 10 | .3965 .3925 | 9.970 10.071 | .2705 | 6.871 | | 7 | 177.8 | 4.438 | 112.71 | 3.125 | 79.38 | 6 | |
| .406 | 10.32 | .4051 .4091 | 10.290 10.391 | .2831 | 7.191 | 8 | 203.2 | 5.438 | 138.11 | 3.563 | 90.49 | 6 | | |
| .433 | 11 | .4320 .4360 | 10.973 11.074 | .2779 | 7.059 | 8 | 203.2 | 5.438 | 138.11 | 3.688 | 93.66 | 6 | | |
| .438 | 11.11 | .4365 .4405 | 11.087 11.189 | .2825 | 7.176 | 8 | 203.2 | 5.438 | 138.11 | 3.688 | 93.66 | 6 | | |
| .469 | 11.91 | .4678 .4718 | 11.882 11.984 | .3138 | 7.971 | 8 | 203.2 | 5.438 | 138.11 | 3.688 | 93.66 | 8 | | |
| .472 | 12 | .4710 .4750 | 11.963 12.065 | .3174 | 8.062 | ↓ | 8 | 203.2 | 5.438 | 138.11 | 3.688 | 93.66 | 8 | |

Tool specifications

Bearingizing Tools .188 to 1.250 in. (4.76 to 31.75mm) *continued*

| NOMINAL TOOL SIZE | | BUILD-UP RANGE | | CAM DIAMETER | | SHANK | OVERALL LENGTH | | WORK LENGTH | | | | NO. OF ROLLS |
|-------------------|-------|------------------|------------------|--------------|--------|-------------------|----------------|--------|-------------|--------|---------|--------|--------------|
| INCHES | MM | INCHES | MM | INCHES | MM | | INCHES | MM | MAXIMUM | | MINIMUM | | |
| | | | | | | | | | INCHES | MM | INCHES | MM | |
| .500 | 12.70 | .4990 .5030 | 12.675 12.776 | .3450 | 8.763 | ↑ | 8 | 203.2 | 5.438 | 138.11 | 3.688 | 93.66 | 8 |
| .512 | 13 | .5110 .5150 | 12.979 13.081 | .3568 | 9.063 | .500 in. DIA. | 8 | 203.2 | 5.438 | 138.11 | 3.688 | 93.66 | 8 |
| .531 | 13.49 | .5303 .5343 | 13.470 13.571 | .3763 | 9.558 | or | 8 | 203.2 | 5.438 | 138.11 | 3.688 | 93.66 | 8 |
| .551 | 14 | .5500 .5540 | 13.970 14.072 | .3962 | 10.063 | 12mm DIA. | 8 | 203.2 | 5.438 | 138.11 | 3.688 | 93.66 | 8 |
| .563 | 14.29 | .5615 .5655 | 14.262 14.364 | .4075 | 10.351 | ↓ | 8 | 203.2 | 5.438 | 138.11 | 3.688 | 93.66 | 8 |
| .591 | 15 | .5936 .5896 | 15.077 14.976 | .4356 | 11.064 | ↑ | 8 | 203.2 | 4.875 | 123.83 | 3.125 | 79.38 | 8 |
| .594 | 15.09 | .5928 .5968 | 15.057 15.159 | .4388 | 11.146 | | 8 | 203.2 | 4.875 | 123.83 | 3.125 | 79.38 | 8 |
| .625 | 15.87 | .6240 .6280 | 15.850 15.951 | .4390 | 15.151 | | 8 | 203.2 | 4.875 | 123.83 | 3.125 | 79.38 | 8 |
| .630 | 16 | .6290 .6330 | 15.977 16.078 | .4439 | 11.275 | | 8 | 203.2 | 4.875 | 123.83 | 3.125 | 79.38 | 8 |
| .656 | 16.67 | .6553 .6593 | 16.645 16.746 | .4703 | 11.946 | | 8 | 203.2 | 4.875 | 123.83 | 3.125 | 79.38 | 8 |
| .669 | 17 | .6680 .6720 | 16.967 17.069 | .4833 | 12.276 | | 8 | 203.2 | 4.875 | 123.83 | 3.125 | 79.38 | 8 |
| .688 | 17.46 | .6865 .6905 | 17.437 17.539 | .5015 | 12.738 | | 8 | 203.2 | 4.875 | 123.83 | 3.125 | 79.38 | 8 |
| .709 | 18 | .7080 .7120 | 17.983 18.085 | .5227 | 13.277 | .750 in. DIA. | 8 | 203.2 | 4.875 | 123.83 | 3.125 | 79.38 | 10 |
| .719 | 18.26 | .7178 .7218 | 18.232 18.334 | .5328 | 13.533 | or | 8 | 203.2 | 4.875 | 123.83 | 3.125 | 79.38 | 10 |
| .748 | 19 | .7470 .7510 | 18.974 19.075 | .5620 | 14.275 | 20mm DIA. | 8 | 203.2 | 4.875 | 123.83 | 3.125 | 79.38 | 10 |
| .750 | 19.05 | .7490 .7530 | 19.025 19.126 | .5640 | 14.326 | | 8 | 203.2 | 4.875 | 123.83 | 3.125 | 79.38 | 10 |
| .781 | 19.84 | .7803 .7843 | 19.820 19.921 | .5953 | 15.121 | | 8 | 203.2 | 4.875 | 123.83 | 3.125 | 79.38 | 10 |
| .787 | 20 | .7860 .7900 | 19.964 20.066 | .6014 | 15.276 | | 8 | 203.2 | 4.875 | 123.83 | 3.125 | 79.38 | 10 |
| .813 | 20.64 | .8115 .8155 | 20.612 20.714 | .6265 | 15.913 | | 8 | 203.2 | 4.875 | 123.83 | 3.125 | 79.38 | 10 |
| .827 | 21 | .8260 .8300 | 20.980 21.082 | .6408 | 16.276 | | 8 | 203.2 | 4.875 | 123.83 | 3.125 | 79.38 | 10 |
| .844 | 21.43 | .8428 .8468 | 21.407 21.509 | .5958 | 15.133 | | 9 | 228.60 | 5.875 | 149.23 | 3.75 | 95.25 | 10 |
| .866 | 22 | .8650 .8690 | 11.971 22.076 | .6181 | 15.700 | | 9 | 228.60 | 5.875 | 149.23 | 3.75 | 95.25 | 10 |
| .875 | 22.22 | .8740 .8780 | 22.200 22.301 | .6270 | 15.926 | ↓ | 9 | 228.60 | 5.875 | 149.23 | 3.75 | 95.25 | 10 |
| .905 | 23 | .9050 .9090 | 22.987 23.087 | .6583 | 16.721 | ↑ | 10 | 254.00 | 6.125 | 155.58 | 4.00 | 101.60 | 10 |
| .906 | 23.02 | .9053 .9093 | 22.995 23.096 | .6583 | 16.721 | | 10 | 254.00 | 6.125 | 155.58 | 4.00 | 101.60 | 10 |
| .938 | 23.81 | .9365 .9405 | 23.787 23.889 | .6895 | 17.513 | | 10 | 254.00 | 6.125 | 155.58 | 4.00 | 101.60 | 10 |
| .945 | 24 | .9440 .9480 | 23.978 24.078 | .6969 | 17.701 | 1.000 in. DIA. | 10 | 254.00 | 6.125 | 155.58 | 4.00 | 101.60 | 10 |
| .969 | 24.61 | .9678 .9718 | 24.582 24.684 | .7208 | 18.308 | or | 10 | 254.00 | 6.125 | 155.58 | 4.00 | 101.60 | 12 |
| .984 | 25 | .9830 .9870 | 24.968 25.070 | .7363 | 18.702 | 25mm DIA. | 10 | 254.00 | 6.125 | 155.58 | 4.00 | 101.60 | 12 |
| 1.000 | 25.40 | .9990 1.0030 | 25.375 25.476 | .7520 | 19.101 | | 10 | 254.00 | 6.125 | 155.58 | 4.00 | 101.60 | 12 |
| 1.063 | 26.99 | 1.0615 1.0655 | 26.962 27.064 | .8145 | 20.688 | | 10 | 254.00 | 6.125 | 155.58 | 4.00 | 101.60 | 12 |
| 1.125 | 28.57 | 1.1240 1.1280 | 28.550 28.651 | .8770 | 22.276 | | 10 | 254.00 | 6.125 | 155.58 | 4.00 | 101.60 | 12 |
| 1.188 | 30.16 | 1.1865 1.1905 | 30.137 30.239 | .9395 | 23.863 | | 10 | 254.00 | 6.125 | 155.58 | 4.00 | 101.60 | 12 |
| 1.250 | 31.75 | 1.2490 1.2530 | 31.725 31.826 | .9390 | 23.851 | ↓ | 10 | 254.00 | 6.125 | 155.58 | 4.00 | 101.60 | 14 |

Shanks other than shown above are available upon request.

Operation & maintenance

Machines

Any machine capable of rotating the tool — e.g. drill press, speed lathe, or turret lathe — may be used.

Material

Any ductile or malleable material — powdered, laminated, cast, forged, extruded, sintered or hardened (maximum Rc 38) can be bearingized. Steel, stainless, alloy, cast iron, aluminum, copper and brass are examples.

Procedure

Proper part preparation is essential in order to obtain precise results. Cogsdill will recommend the surface preparation and amount of stock to leave for Bearingizing, but some trials may be required to determine these factors for optimum results.

Since the change in dimension is partly governed by the character of the prepared surface, usually coarser preparation will permit a greater change in dimension than is possible with finer preparation. The consistent pattern obtained from boring will produce the best finish.

The other major factor in dimensional change is the ability of

the material to grain-flow without flaking. The total change may vary from .0001 inch (.0025mm) on harder materials to as much as .003 inch (.0762mm) on sintered self-lubricating bushings. Less than .001 inch (.0254mm) stock for Bearingizing generally provides a good starting point for trials.

Tool diameter changes

Bearingizing rolls are manufactured in increments of .0001 inch (.0025mm). Bearingizing Tools are adjustable by roll change only. One set of rolls can be removed and a new set of a different size installed, thus effectively changing the size of the tool — or compensating for tool wear. The working diameter of any tool can be changed over an approximate .004 inch (.1016mm) range by installing different sets of rolls. The rolls are diametrically opposed and available in .0001 inch (.0025mm) increments, therefore the effective tool diameter can be changed in .0002 inch (.0051mm) increments.

Lubrication

For most metals use any standard grade of lightweight, low viscosity lubricating oil, or any mineral, sulphur or soluble oil that is compatible with the alloy or metal to be burnished and is recommended for fine surface finishing.

For aluminum or magnesium alloys, use a highly refined oil-based coolant with low viscosity.

For cast iron a mineral seal or water soluble solution is ideal — flooding the part is recommended.

Cleaning

The Bearingizing tool should be cleaned periodically with a light-bodied oil of about 100 Saybolt universal scale, similar to a light spindle oil. A few drops applied with squirt can or brush to the rolls and cage (with cage stopped) will wash metal dust particles out when tool is operated, keeping the cam surfaces and roll pockets clean.

Speed and feed recommendations

| HOLE DIAMETER | | RPM | HOLE DIAMETER | | RPM | HOLE DIAMETER | | RPM | HOLE DIAMETER | | RPM |
|---------------|--------|------|---------------|--------|------|---------------|-------|-----|---------------|--------|-----|
| INCHES | MM | | INCHES | MM | | INCHES | MM | | INCHES | MM | |
| .188 | 4.762 | 8200 | .750 | 19.050 | 2000 | 1.750 | 44.45 | 875 | 2.750 | 69.85 | 555 |
| .250 | 6.350 | 6100 | .875 | 22.225 | 1800 | 1.875 | 47.62 | 815 | 2.875 | 73.02 | 530 |
| .312 | 7.937 | 4900 | 1.000 | 25.40 | 1500 | 2.000 | 50.80 | 765 | 3.000 | 76.20 | 510 |
| .375 | 9.525 | 4100 | 1.125 | 28.57 | 1350 | 2.125 | 53.97 | 720 | 3.500 | 88.90 | 435 |
| .437 | 11.112 | 3500 | 1.250 | 31.75 | 1200 | 2.250 | 57.15 | 680 | 4.000 | 101.60 | 380 |
| .500 | 12.700 | 3100 | 1.375 | 34.92 | 1100 | 2.375 | 60.32 | 645 | 4.500 | 114.30 | 340 |
| .562 | 14.287 | 2700 | 1.500 | 38.10 | 1000 | 2.500 | 63.50 | 610 | 5.000 | 127.00 | 305 |
| .625 | 15.875 | 2400 | 1.625 | 41.27 | 950 | 2.625 | 66.67 | 580 | 5.500 | 139.70 | 280 |

FEED—Feed Rate in and out should be quite rapid, 150-250 inches per minute (3.81M-6.35M), rather than slow.

The speeds and feeds recommended are for best tool life.

The same results can be achieved at slower rate, but with some sacrifice of tool life.

External Roll-a-Finish® tools

XBB series

For burnishing the outside diameter of cylindrical parts, such as shafts rotating in bushings or bearings. Provides an ideal surface for grease and oil seals.

Available from stock for nominal diameters from 1,5 to 20,0 mm (.059 to .787 inches). Micro XBB tools and XBB tools larger than 20,0mm are available upon request.

Offered in *two styles*:

- **Micro XBB tools**, with a very small body diameter and short overall length, are designed for Swiss auto-style machines. The tools cover a range of nominal diameters from 1,00 to 9,00mm (.039 to .354 inch).
- **Regular XBB tools** are available for nominal sizes from 1,5 to 65,0mm (.059 to 2.559 inch).

All XBB tools are bottoming-style and require machine feeding. The tools are adjustable in increments of .002mm (.0001 inch).




XBB 1,5-20,0



XBB 21,0-40,0

Standard tool specifications

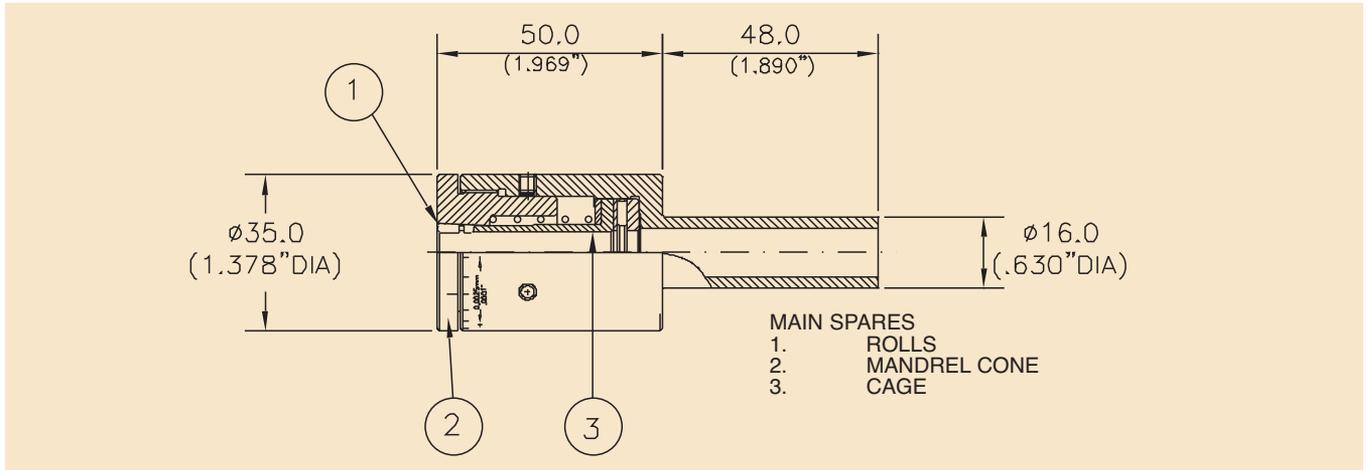


MICRO XBB SERIES ROLL-A-FINISH® TOOLS

1,00 to 9,00mm (.039" to .354")

| DIAMETER RANGE | | | | TOOL NUMBER |
|----------------|--------|-------|--------|-------------------------|
| MIN | | MAX | | BOTTOMING (No Helix) |
| mm | Inches | mm | Inches | |
| 0,75 | .030 | 1,025 | .040 | MICRO 1,00 |
| 1,00 | .039 | 1,275 | .050 | MICRO 1,25 |
| 1,25 | .049 | 1,525 | .060 | MICRO 1,50 |
| 1,50 | .059 | 1,775 | .070 | MICRO 1,75 |
| 1,75 | .069 | 2,025 | .080 | MICRO 2,00 |
| 2,00 | .079 | 2,275 | .090 | MICRO 2,25 |
| 2,25 | .089 | 2,525 | .099 | MICRO 2,50 |
| 2,50 | .098 | 2,775 | .109 | MICRO 2,75 |
| 2,75 | .108 | 3,025 | .119 | MICRO 3,00 |
| 3,00 | .118 | 3,275 | .129 | MICRO 3,25 |
| 3,25 | .128 | 3,525 | .139 | MICRO 3,50 |
| 3,50 | .138 | 3,775 | .149 | MICRO 3,75 |
| 3,75 | .148 | 4,025 | .158 | MICRO 4,00 |
| 4,00 | .158 | 4,275 | .168 | MICRO 4,25 |
| 4,25 | .167 | 4,525 | .178 | MICRO 4,50 |
| 4,50 | .177 | 4,775 | .188 | MICRO 4,75 |
| 4,75 | .187 | 5,025 | .198 | MICRO 5,00 |
| 5,00 | .197 | 5,275 | .208 | MICRO 5,25 |
| 5,25 | .207 | 5,525 | .218 | MICRO 5,50 |
| 5,50 | .217 | 5,775 | .227 | MICRO 5,75 |
| 5,75 | .226 | 6,025 | .237 | MICRO 6,00 |
| 6,00 | .236 | 6,275 | .247 | MICRO 6,25 |
| 6,25 | .246 | 6,525 | .257 | MICRO 6,50 |
| 6,50 | .256 | 6,775 | .267 | MICRO 6,75 |
| 6,75 | .266 | 7,025 | .277 | MICRO 7,00 |
| 7,00 | .276 | 7,275 | .286 | MICRO 7,25 |
| 7,25 | .285 | 7,525 | .296 | MICRO 7,50 |
| 7,50 | .295 | 7,775 | .306 | MICRO 7,75 |
| 7,75 | .305 | 8,025 | .316 | MICRO 8,00 |
| 8,00 | .315 | 8,275 | .326 | MICRO 8,25 |
| 8,25 | .325 | 8,525 | .336 | MICRO 8,50 |
| 8,50 | .335 | 8,775 | .345 | MICRO 8,75 |
| 8,75 | .344 | 9,025 | .355 | MICRO 9,00 |

Standard tool specifications

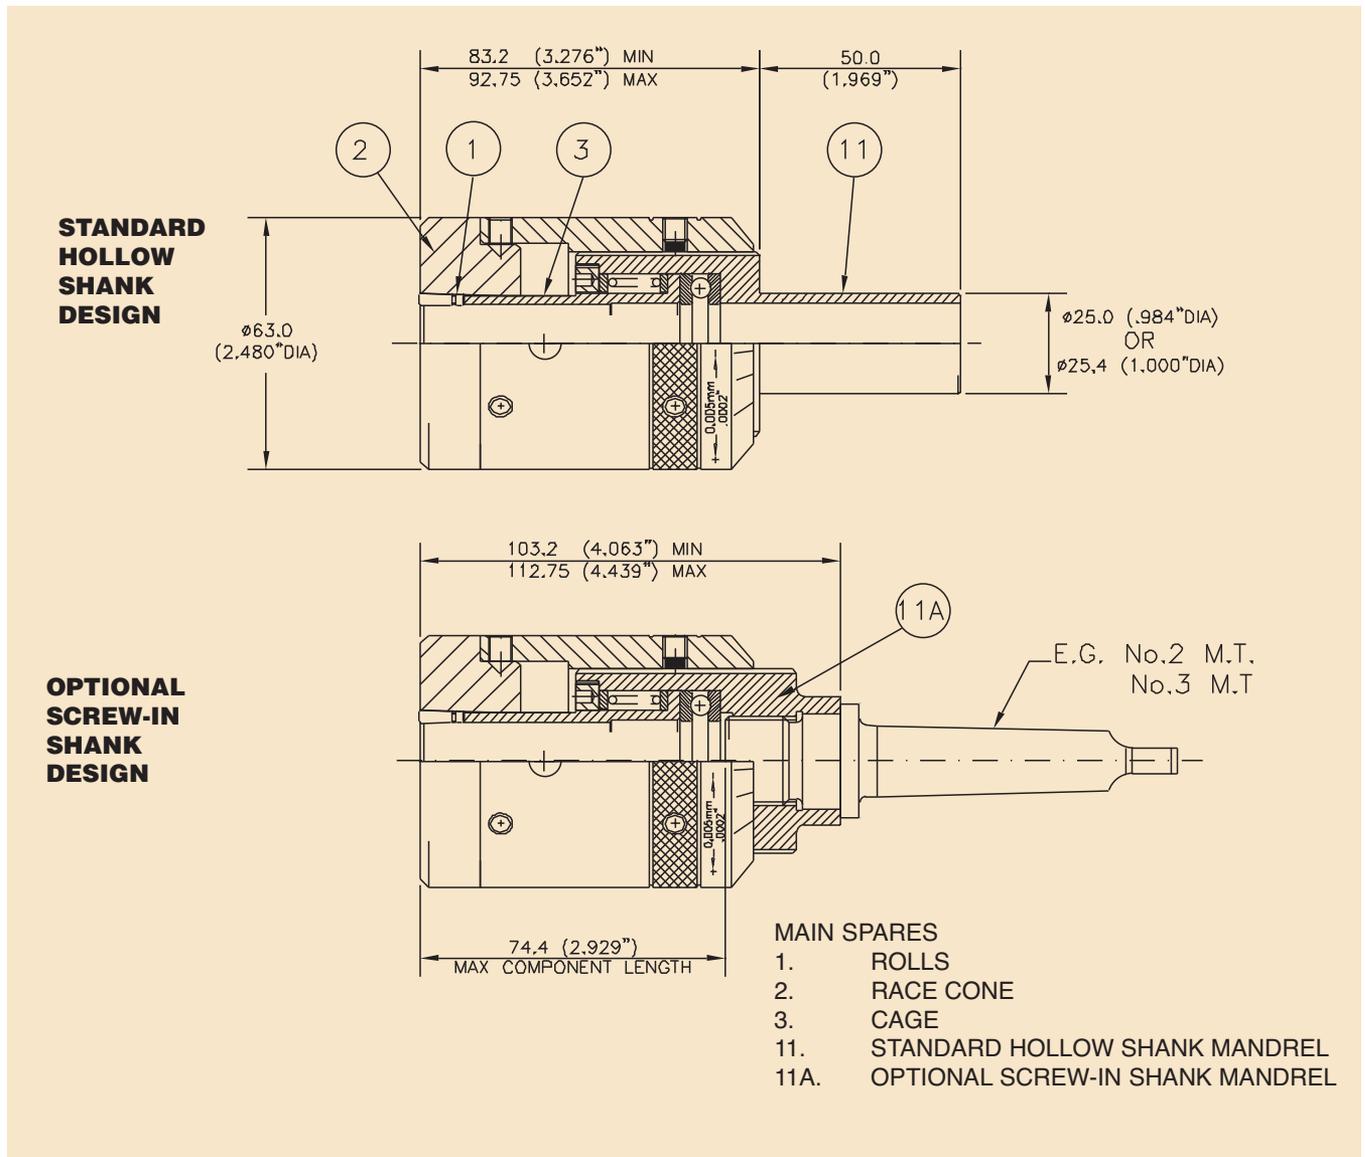

XBB SERIES ROLL-A-FINISH® TOOLS

1,5 to 20,0mm (.059" to .787")

SEE NEXT PAGE FOR CHART

Standard tool specifications


XBB SERIES ROLL-A-FINISH® TOOLS

1,5 to 20,0mm (.059" to .787")

| DIAMETER RANGE | | | | TOOL NUMBER |
|----------------|--------|-------|--------|-------------------------|
| MIN | | MAX | | BOTTOMING (No Helix) |
| mm | Inches | mm | Inches | |
| 1,00 | .039 | 1,60 | .063 | XBB 1,5 |
| 1,50 | .059 | 2,10 | .083 | XBB 2,0 |
| 2,00 | .078 | 2,60 | .102 | XBB 2,5 |
| 2,50 | .098 | 3,10 | .122 | XBB 3,0 |
| 3,00 | .118 | 3,60 | .142 | XBB 3,5 |
| 3,50 | .138 | 4,10 | .161 | XBB 4,0 |
| 4,00 | .157 | 4,60 | .181 | XBB 4,5 |
| 4,50 | .177 | 5,10 | .201 | XBB 5,0 |
| 5,00 | .197 | 5,60 | .220 | XBB 5,5 |
| 5,50 | .217 | 6,10 | .240 | XBB 6,0 |
| 6,00 | .236 | 6,60 | .260 | XBB 6,5 |
| 6,50 | .256 | 7,10 | .280 | XBB 7,0 |
| 7,00 | .276 | 7,60 | .299 | XBB 7,5 |
| 7,50 | .295 | 8,10 | .319 | XBB 8,0 |
| 8,00 | .315 | 8,60 | .339 | XBB 8,5 |
| 8,50 | .335 | 9,10 | .358 | XBB 9,0 |
| 9,00 | .354 | 9,60 | .378 | XBB 9,5 |
| 9,50 | .374 | 10,10 | .398 | XBB 10,0 |
| 10,00 | .394 | 10,60 | .417 | XBB 10,5 |
| 10,50 | .413 | 11,10 | .437 | XBB 11,0 |
| 11,00 | .433 | 11,60 | .457 | XBB 11,5 |
| 11,50 | .453 | 12,10 | .476 | XBB 12,0 |
| 12,00 | .472 | 12,60 | .496 | XBB 12,5 |
| 12,50 | .492 | 13,10 | .516 | XBB 13,0 |
| 13,00 | .512 | 13,60 | .535 | XBB 13,5 |
| 13,50 | .531 | 14,10 | .555 | XBB 14,0 |
| 14,00 | .551 | 14,60 | .575 | XBB 14,5 |
| 14,50 | .571 | 15,10 | .594 | XBB 15,0 |
| 15,00 | .591 | 15,60 | .614 | XBB 15,5 |
| 15,50 | .610 | 16,10 | .634 | XBB 16,0 |
| 16,00 | .630 | 16,60 | .654 | XBB 16,5 |
| 16,50 | .650 | 17,10 | .673 | XBB 17,0 |
| 17,00 | .669 | 17,60 | .693 | XBB 17,5 |
| 17,50 | .689 | 18,10 | .713 | XBB 18,0 |
| 18,00 | .709 | 18,60 | .732 | XBB 18,5 |
| 18,50 | .728 | 19,10 | .752 | XBB 19,0 |
| 19,00 | .748 | 19,60 | .772 | XBB 19,5 |
| 19,50 | .768 | 20,10 | .791 | XBB 20,0 |

Optional Self-Feeding 1 1/2° Helix Style Tools are Available from XBB 6,5 onwards

Standard tool specifications

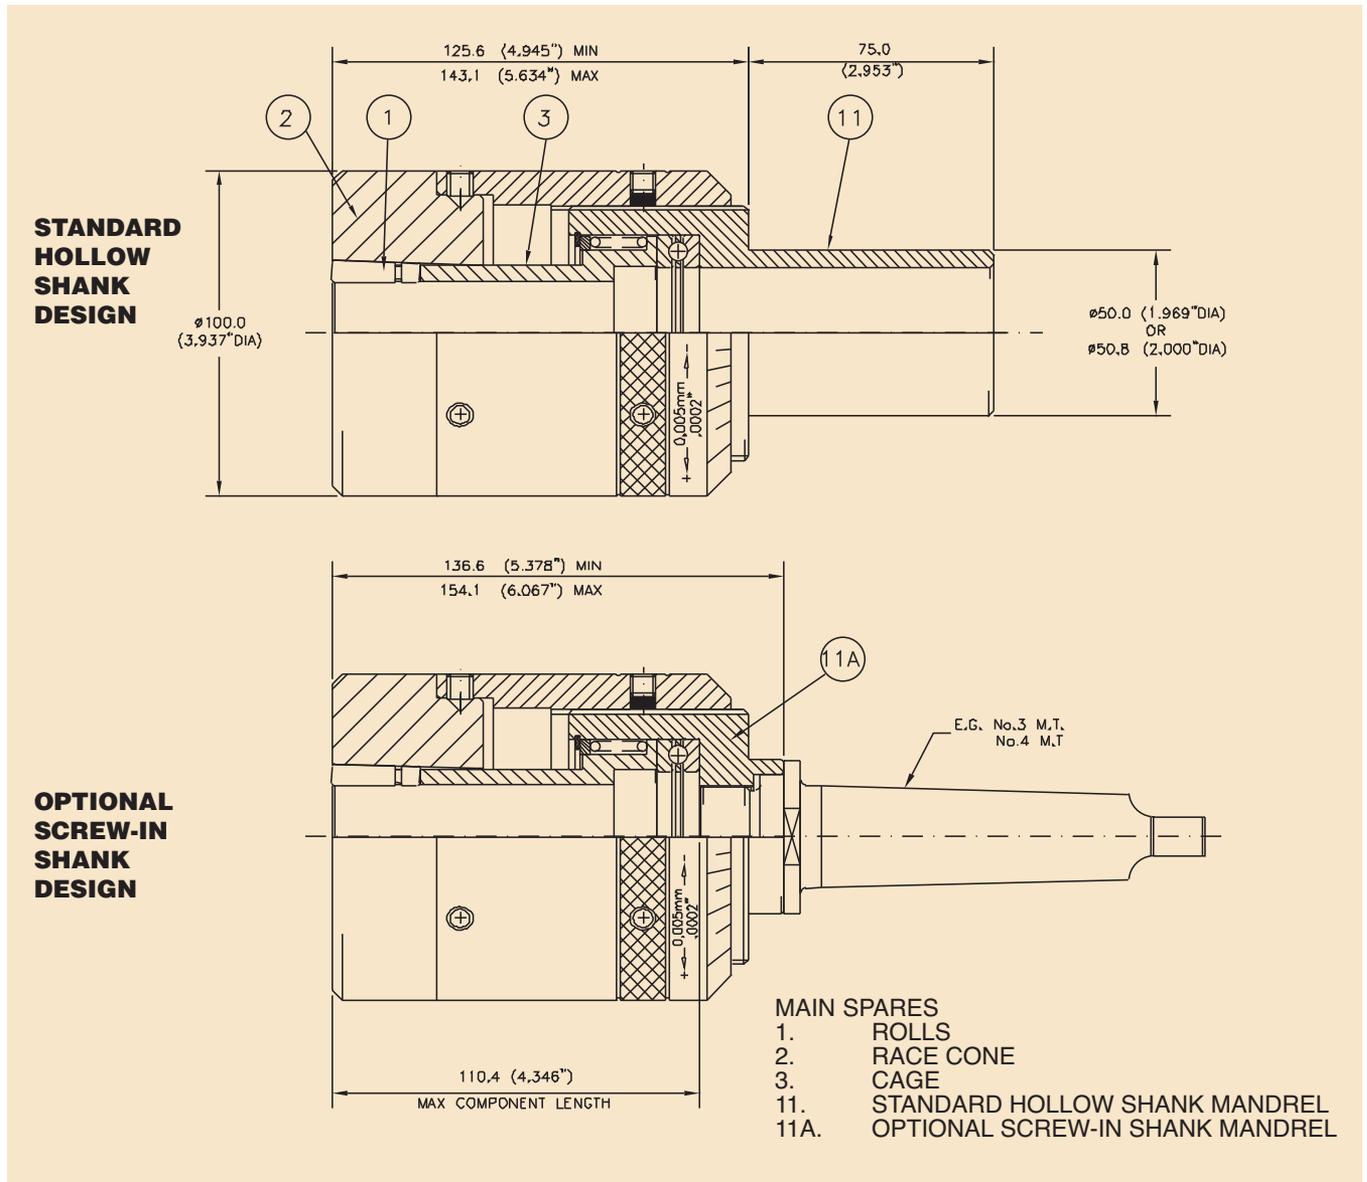

XBB SERIES ROLL-A-FINISH® TOOLS

21,0 to 40,0mm (.827" to 1.575")

SEE NEXT PAGE FOR CHART


XBB SERIES ROLL-A-FINISH® TOOLS

21,0 to 40,0mm (.827" to 1.575")

| DIAMETER RANGE | | | | TOOL NUMBER |
|----------------|--------|-------|--------|-------------------------|
| MIN | | MAX | | BOTTOMING (No Helix) |
| mm | Inches | mm | Inches | |
| 20,00 | .787 | 21,10 | .831 | XBB 21 |
| 21,00 | .827 | 22,10 | .870 | XBB 22 |
| 22,00 | .866 | 23,10 | .909 | XBB 23 |
| 23,00 | .906 | 24,10 | .949 | XBB 24 |
| 24,00 | .945 | 25,10 | .988 | XBB 25 |
| 25,00 | .984 | 26,10 | 1.028 | XBB 26 |
| 26,00 | 1.024 | 27,10 | 1.067 | XBB 27 |
| 27,00 | 1.063 | 28,10 | 1.106 | XBB 28 |
| 28,00 | 1.102 | 29,10 | 1.146 | XBB 29 |
| 29,00 | 1.142 | 30,10 | 1.185 | XBB 30 |
| 30,00 | 1.181 | 31,10 | 1.224 | XBB 31 |
| 31,00 | 1.220 | 32,10 | 1.264 | XBB 32 |
| 32,00 | 1.260 | 33,10 | 1.303 | XBB 33 |
| 33,00 | 1.299 | 34,10 | 1.343 | XBB 34 |
| 34,00 | 1.339 | 35,10 | 1.382 | XBB 35 |
| 35,00 | 1.378 | 36,10 | 1.421 | XBB 36 |
| 36,00 | 1.417 | 37,10 | 1.461 | XBB 37 |
| 37,00 | 1.457 | 38,10 | 1.500 | XBB 38 |
| 38,00 | 1.496 | 39,10 | 1.539 | XBB 39 |
| 39,00 | 1.535 | 40,10 | 1.579 | XBB 40 |

Optional Self-Feeding 1 1/2° Helix Style Tools are Available for all Sizes in this Range

Standard tool specifications

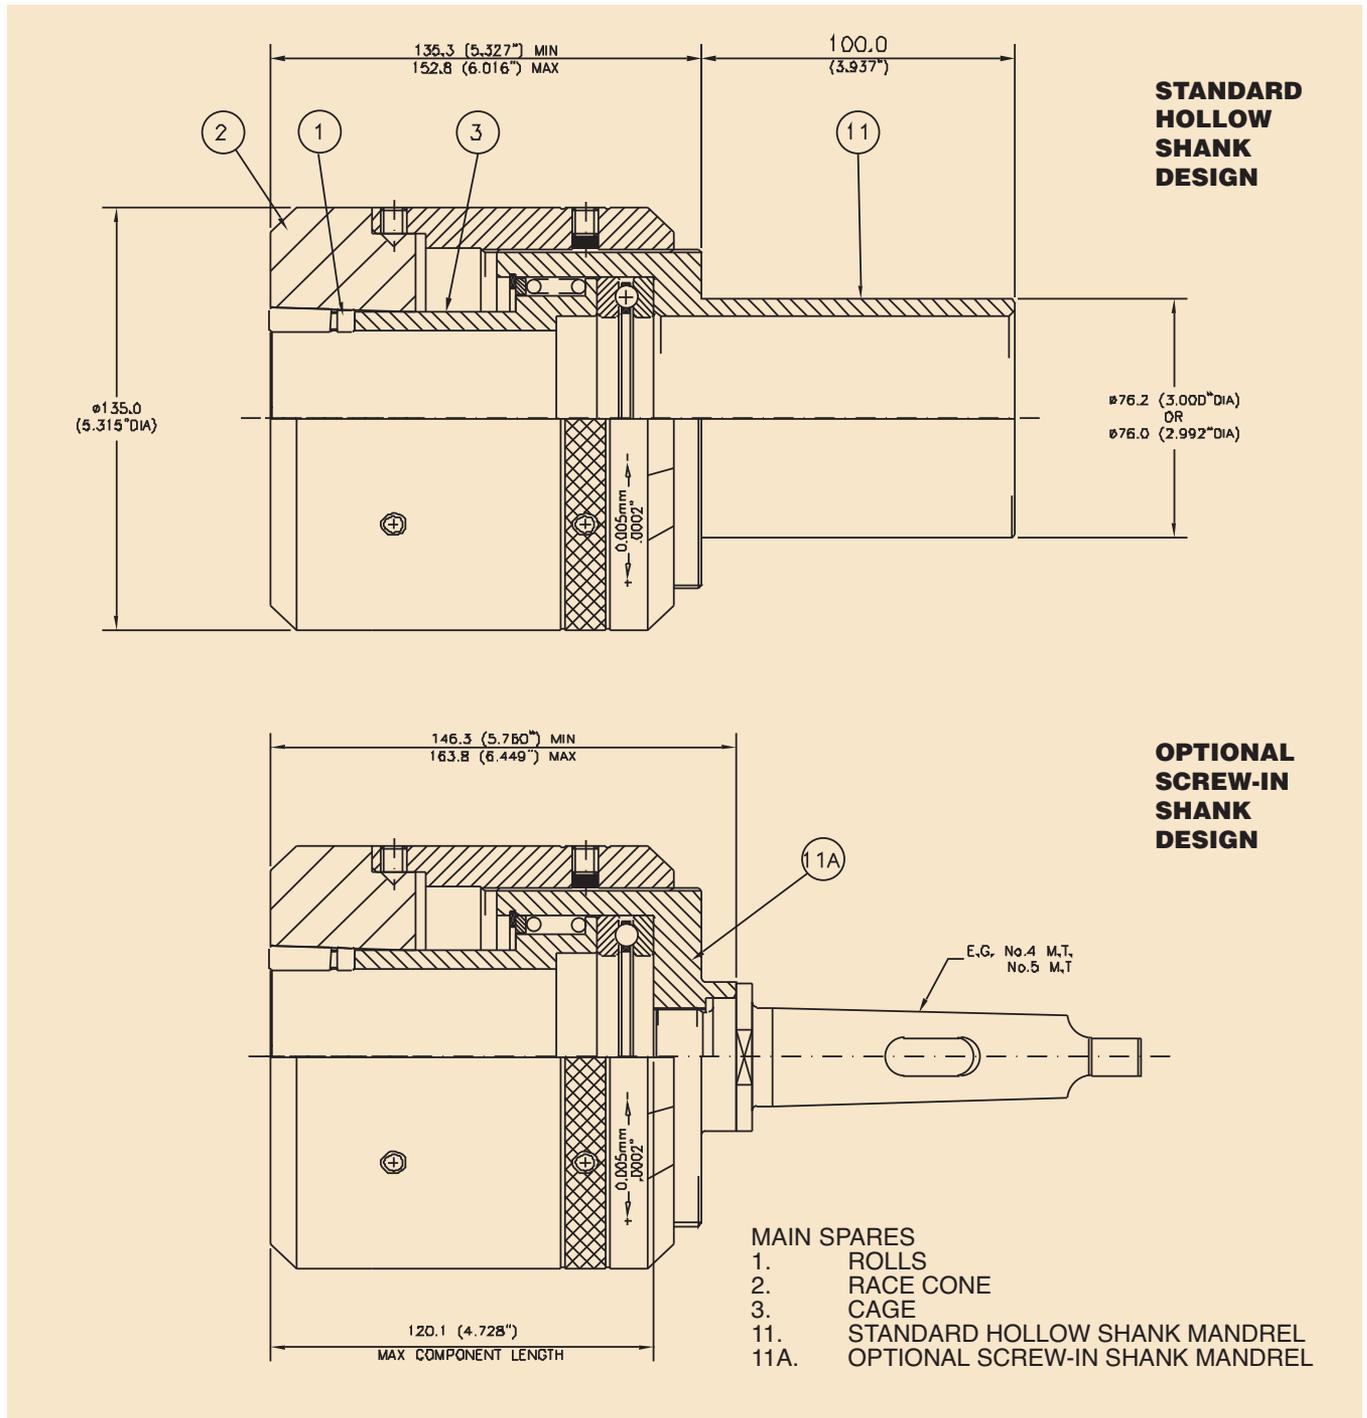

XBB SERIES ROLL-A-FINISH® TOOLS

41,0 to 65,0mm (1.614" to 2.559")

SEE NEXT PAGE FOR CHART

XBB SERIES ROLL-A-FINISH® TOOLS

41,0 to 65,0mm (1.614" to 2.559")

| DIAMETER RANGE | | | | TOOL NUMBER |
|----------------|--------|-------|--------|-------------------------|
| MIN | | MAX | | BOTTOMING (No Helix) |
| mm | Inches | mm | Inches | |
| 40,00 | 1.575 | 41,10 | 1.618 | XBB 41 |
| 41,00 | 1.614 | 42,10 | 1.657 | XBB 42 |
| 42,00 | 1.654 | 43,10 | 1.697 | XBB 43 |
| 43,00 | 1.693 | 44,10 | 1.736 | XBB 44 |
| 44,00 | 1.732 | 45,10 | 1.776 | XBB 45 |
| 45,00 | 1.772 | 46,10 | 1.815 | XBB 46 |
| 46,00 | 1.811 | 47,10 | 1.854 | XBB 47 |
| 47,00 | 1.850 | 48,10 | 1.894 | XBB 48 |
| 48,00 | 1.890 | 49,10 | 1.933 | XBB 49 |
| 49,00 | 1.929 | 50,10 | 1.972 | XBB 50 |
| 50,00 | 1.969 | 51,10 | 2.012 | XBB 51 |
| 51,00 | 2.008 | 52,10 | 2.051 | XBB 52 |
| 52,00 | 2.047 | 53,10 | 2.091 | XBB 53 |
| 53,00 | 2.087 | 54,10 | 2.130 | XBB 54 |
| 54,00 | 2.126 | 55,10 | 2.169 | XBB 55 |
| 55,00 | 2.165 | 56,10 | 2.209 | XBB 56 |
| 56,00 | 2.205 | 57,10 | 2.248 | XBB 57 |
| 57,00 | 2.244 | 58,10 | 2.287 | XBB 58 |
| 58,00 | 2.283 | 59,10 | 2.327 | XBB 59 |
| 59,00 | 2.323 | 60,10 | 2.366 | XBB 60 |
| 60,00 | 2.362 | 61,10 | 2.406 | XBB 61 |
| 61,00 | 2.402 | 62,10 | 2.445 | XBB 62 |
| 62,00 | 2.441 | 63,10 | 2.484 | XBB 63 |
| 63,00 | 2.480 | 64,10 | 2.524 | XBB 64 |
| 64,00 | 2.520 | 65,10 | 2.563 | XBB 65 |

Optional Self-Feeding 1/2° Helix Style Tools are Available for all Sizes in this Range

ROLLS

| EXTERNAL ROLLER BURNISHING ROLL CHART | | |
|---------------------------------------|-----------|------------|
| TOOL NUMBER | | QTY / TOOL |
| (FROM - TO) | BOTTOMING | |
| MICRO XBB 1,00-5,50 | B250 | 3 |
| MICRO XBB 6,00-9,00 | B250 | 5 |
| XBB 1,50 - 5,50 | B312 | 3 |
| XBB 6,0 - 20 | B438 | 5 |
| XBB 21 - 40 | B875 | 7 |
| XBB 41 - 65 | B1125 | 9 |

Selection & ordering information

Internal Roll-a-Finish® tools

Specify tool number. First select series SRMR or SRMB. If self-feeding cage is desired, add "helix." If a bottoming tool is desired add a "B". Next, indicate nominal tool size. (*Examples: SRMR 25; SRMB 25; SRMR 25 with helix.*)

If extra work length is desired, designate by adding the suffix +50 or +100. (*Examples: SRMR 25+50, SRMR 25+100.*) If no work length is specified, we will supply the shortest work length, which is shown in the respective tool specifications for each series.

When ordering bottoming-style tools, please furnish part print or detailed sketch.

External Roll-a-Finish® tools

When ordering external Roll-a-Finish tools, specify tool number. (*Examples: XBB20,0; XBB40,0.*)

For self feeding tools, please specify "with helix".

Replacement parts

For mandrel or race assemblies, specify tool number and description of part. (*Examples: XBB 25,0 mandrel assembly; XBB40,0 race assembly.*)

Order individual components by detail number (if known).

Order replacement rolls in complete sets. (NOTE: Mixing new and used rolls will reduce the effectiveness of the tool.) Specify detail number, description, and tool number. (*Example: Set of rolls for XBB 25,0.*)

NOTE: Use cage marking to establish nominal tool size.

Bearingizing tools

For tool selection and ordering information for Bearingizing tools and replacement parts, please refer to page 20.

order
to



Part preparation & operating parameters for roller burnishing

Note

The following instructions are intended for use with standard Cogsdill Roll-a-Finish tools. If your tool is a special design, please refer to your tool drawing for special operating parameters.

Machines

Cogsdill Roll-a-Finish tools are extremely versatile. The tool can be used on any type of shop machinery, including lathes, drill presses, machining centers, or any rotating spindle. Standard tools are designed for right-hand rotation, with either tool or part rotating.

Material


Almost any metal, particularly any ductile or malleable metal, such as steel, stainless, alloy, cast iron, aluminum, copper, brass, bronze, etc., may be successfully roller burnished. Hardness should normally be less than 40 on the Rockwell “C” scale. (If hardness exceeds Rc 40 consult Cogsdill’s Engineering Department.)

Part preparation

Proper part preparation is essential to obtain optimum results from roller burnishing. Due to the fact that no metal is removed in the process, finish depends upon the existence of a uniform and tearfree surface which will be caused to flow under the pressure exerted through the rolls. A 2-3 micrometers Ra surface (80-120 microinch), which is typical of boring or turning, is considered an ideal surface for roller burnishing. This relatively rough prefinish allows the Roll-a-Finish tool to displace a greater amount of material on the surface of the workpiece. It also allows the prefinish tolerance to be much greater than with a smoother prefinish. A smoother prefinish reduces the roller burnishing effect, which means the prefinished size must be much closer to the acceptable tolerance. The ideal prefinished prior to roller burnishing is related to such variables as material, hardness, and tolerance requirements. Final part requirements of size, finish, and hardness will dictate preparation requirements, and some trial runs may be necessary in order to determine the ideal prefinish.

Final size of a workpiece depends upon its initial dimension and surface preparation. A very smooth prefinish cannot be reduced in size as much as a rougher prefinish. Successful results from roller burnishing depend upon the prefinish operation and will vary as shown in the Stock Displacement chart on page 31. The displacement column in the chart shows how much change in size may be expected for each starting or prefinished condition.

If sizing, finishing, and work hardening are to be optimized for a particular application, initial part preparation is critical and fine tool adjustment is necessary.

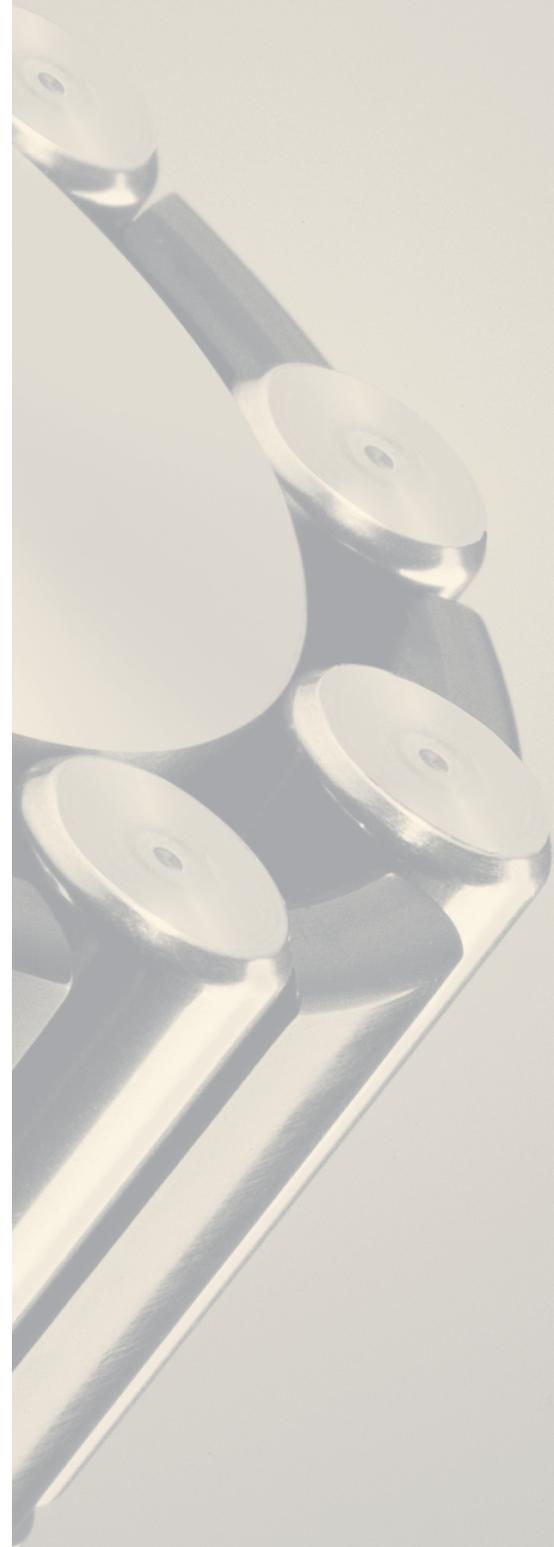

Part preparation & operating parameters for roller burnishing


Tool adjustment procedure

Cogsdill manufactures a variety of standard Roll-a-Finish Tools. Although the detail numbers and nomenclature for the adjustment components differ somewhat for the various tool series, the adjustment procedure for all Roll-a-Finish tools is basically the same.

For all SRMR and SRMB tools, a rear castellated adjusting collar interlocks with a threaded and castellated bearing collar to keep the tool in adjustment. In order to adjust the tool, retract the spring-loaded adjusting collar and rotate the threaded bearing collar. This will alter the position of the tapered mandrel or race in relation to the tapered rolls, thereby changing the effective tool

diameter within the specified diameter range. XBB tools are adjusted by rotating the housing on the threaded mandrel shank. Tool adjustment requires the use of an Allen wrench. SRMR, SRMB and XBB series tools adjust in increments of .0025mm (.0001 inch), and in increments of .005mm (.0002 inch) for tools over 50mm in diameter.

Spring-loaded non-rotating adjusting collar (pull back to disengage from bearing collar)

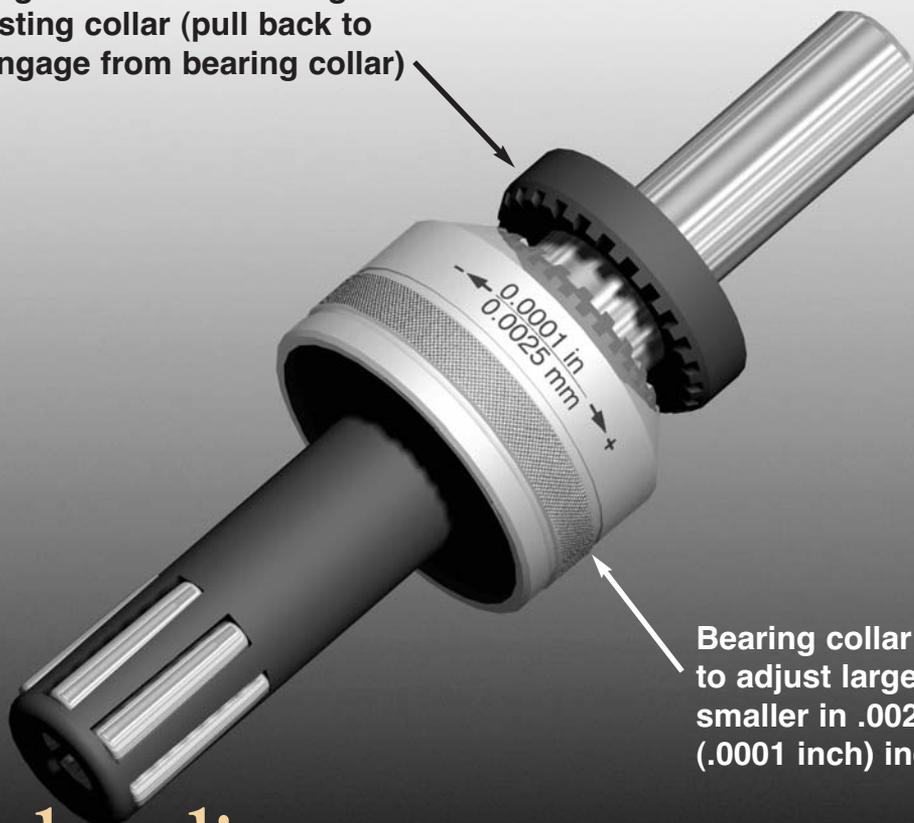

Bearing collar (rotate to adjust larger or smaller in .0025mm (.0001 inch) increments)

tool adjustment procedure

Part preparation & operating parameters for roller burnishing

Follow these steps when adjusting a Roll-a-Finish® tool:

- 1** The first step is to rotate the adjustment collar assembly in a plus or minus direction as marked on the tool until the workpiece will just slip over the rolls. This procedure is similar to plug or ring gaging a part. This will set tool working diameter the same as prepared part diameter.
- 2** Retract the tool from the part and increase tool working diameter by approximately .01 to .02mm (.0005 to .001inch) over the prepared part diameter. On SRMR and SRMB tools, a one-notch change equals .002mm (.0001 inch) diameter change. On tools over 50.0mm in diameter, calibrations are in .005mm (.0002 inch) increments.
- 3** Now, run the first part and check for finish. Readjust tool diameter as necessary to obtain desired surface finish. Several trial runs may be necessary; however, once properly adjusted, only one pass of the tool is required for roller burnishing.
- 4** Measure finished parts for size. The difference between the prefinished and roller burnished sizes represents actual stock displacement. If necessary, modify the prefinished size to allow for more or less stock displacement.
- 5** If the prefinished size is changed, the burnishing tool must be adjusted by the same amount as the cutting tool to produce the desired finish.

Stock displacement

Approximate prefinishes resulting from common machining operations and the probable displacements produced by the roller burnishing process are listed below:

| PREFINISH OPERATION | PREFINISH SURFACE | |
|---------------------|-------------------|-------------|
| | Micrometers | Microinches |
| Hone | .25-.50 | 10-20 |
| Grind | .50-1.00 | 20-40 |
| Ream | 1.00-1.50 | 40-60 |
| Bore, Turn (Medium) | 2.00-3.00 | 80-100 |
| Bore, Turn (Rough) | 3.75-5.00 | 150-200 |

| PREFINISH OPERATION | EXPECTED DISPLACEMENT BY BURNISHING | |
|---------------------|-------------------------------------|-------------|
| | Millimeters | Inches |
| Hone | .002-.005 | .0001-.0002 |
| Grind | .005-.010 | .0002-.0004 |
| Ream | .010-.015 | .0004-.0006 |
| Bore, Turn (Medium) | .020-.030 | .0008-.0012 |
| Bore, Turn (Rough) | .038-.050 | .0015-.0020 |

Surface finishes of .25micrometers (10 microinches) Ra and below are obtainable provided that the prepared surface is uniform and tearfree.

Tool operation

Standard Roll-a-Finish tools are designed for right-hand rotation.

When the Roll-a-Finish tool reaches the end of the desired roller burnishing length, pull the tool from the bore. This reverse action causes the rolls to collapse slightly in the cage to make withdrawal easy.

Part preparation & operating parameters for roller burnishing

Coolant

For most metals use any standard grade, light-weight, low-viscosity lubricating oil, or any mineral, sulphur, or soluble oil compatible with the metal or alloy to be burnished and recommended for fine surface finishing.

For aluminum or magnesium alloys use a highly refined oil-based coolant with low viscosity.

For cast iron a mineral seal oil is ideal. Flooding the part is recommended.

Filtration of the coolant is highly recommended to remove metal particles and grit.

Maintenance & repair

The Roll-a-Finish tool requires only routine maintenance. For long tool life and optimum performance, tool should be kept free of grit and other foreign matter. Rolls, cage, and mandrel should be examined at regular intervals and replaced when the desired size and finish are no longer obtainable. It is always advisable to replace a complete set of rolls, as there will be some sacrifice of tolerance and finish quality if new and used rolls are mixed.

Tools may be returned to Cogsdill for inspection and reconditioning to return them to original operating performance. Contact Cogsdill's Returns Department for a Return Material Authorization Number to assist us in processing your repair order. We will advise price and delivery before proceeding with the repair.

Interchangeability

Mandrel and race assemblies are interchangeable with tool adjustment assemblies within specified ranges. For example, the SRMR and SRMB tools from 12,0 to 25,0mm have a common adjustment assembly.


All standard Roll-a-Finish tools 6,0mm and above can be changed from through-hole to bottoming by changing cage and rolls.

Speed and feed recommendations for internal Roll-a-Finish tools with self-feeding cages ⁽¹⁾

| DIAMETER | | RPM | FEED PER REVOLUTION | |
|----------|--------|-----------|---------------------|-----------|
| MM | INCHES | | MM | INCHES |
| 4.76 | .187 | 1500-4300 | .2540-.3048 | .010-.012 |
| 6.35 | .250 | 1500-4300 | .2540-.3048 | .010-.012 |
| 7.94 | .312 | 1300-3700 | .3048-.3556 | .012-.014 |
| 9.52 | .375 | 1020-3100 | .4064-.5080 | .016-.020 |
| 11.11 | .437 | 875-2600 | .4572-.5842 | .018-.023 |
| 12.70 | .500 | 765-2300 | .4572-.5842 | .018-.023 |
| 14.28 | .562 | 675-2000 | .4572-.5842 | .018-.023 |
| 15.87 | .625 | 610-1800 | .7620-.9144 | .030-.036 |
| 19.05 | .750 | 505-1500 | .7620-.9144 | .030-.036 |
| 22.22 | .875 | 335-1300 | .8636-.9906 | .034-.039 |
| 25.40 | 1.000 | 380-1100 | 1.219-1.321 | .048-.052 |
| 28.57 | 1.125 | 340-1000 | 1.295-1.422 | .051-.056 |
| 31.75 | 1.250 | 305-900 | 1.625-1.752 | .064-.069 |
| 34.92 | 1.375 | 275-825 | 1.956-2.083 | .077-.082 |
| 38.10 | 1.500 | 255-750 | 2.286-2.413 | .090-.095 |
| 41.27 | 1.625 | 235-700 | 2.133-2.235 | .084-.088 |
| 44.45 | 1.750 | 215-650 | 2.464-2.565 | .097-.101 |
| 47.62 | 1.875 | 205-610 | 2.794-2.895 | .110-.114 |
| 50.80 | 2.000 | 190-575 | 3.124-3.226 | .123-.127 |
| 53.97 | 2.125 | 180-540 | 3.454-3.581 | .136-.141 |
| 57.15 | 2.250 | 170-510 | 3.785-3.912 | .149-.154 |
| 60.32 | 2.375 | 160-485 | 4.115-4.242 | .162-.167 |
| 63.50 | 2.500 | 150-460 | 4.445-4.572 | .175-.180 |
| 66.67 | 2.625 | 145-435 | 2.235-2.286 | .088-.090 |
| 69.85 | 2.750 | 140-415 | 2.413-2.464 | .095-.097 |
| 73.02 | 2.875 | 130-400 | 2.565-2.591 | .101-.102 |
| 76.20 | 3.000 | 125-380 | 2.565-2.616 | .101-.103 |
| 88.90 | 3.500 | 110-325 | 3.251-3.302 | .128-.130 |
| 101.60 | 4.000 | 95-285 | 3.912-3.962 | .154-.156 |

(1) When the self-feeding tool is used with power feed, the feed rate MUST exceed the maximum feed rate (shown at left) for a given size. This prevents the rolls from collapsing in the cage and eliminating the burnishing action.

POWER FEEDING CAGES: The feed rate for SRMR and SRMB tools and bottoming style tools with power-feeding cages must be from .25mm/rev. (.010 IPR) up to the maximum rate (shown at left) for the self-feeding tools for the same diameter.



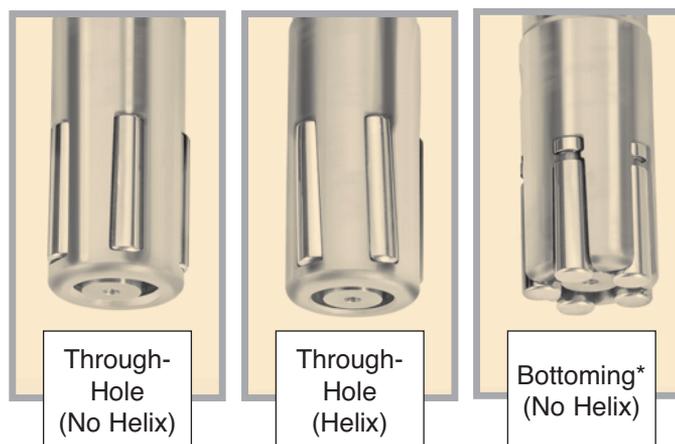


*Mandrel may be cut off if it does not allow full bottoming.

Part preparation & operating parameters for roller burnishing











| TROUBLE-SHOOTING GUIDE | | |
|--|--|--|
| PROBLEM | POSSIBLE CAUSE | SOLUTION |
| 1. FINISH | | |
| A. Scratches | Foreign material Worn rolls. | Clean filter coolant. Inspect – Replace if discolored or marred. |
| B. Flaking. | Too much interference. Too much friction. | Adjust for less interference More lubricity in coolant. |
| C. Spiral marks. Residual tool marks. | Premachining too smooth, or not uniform. | Sharper radius cutting tool, replace or sharpen. Increase feed of cutting tool. |
| | Not enough burnishing. | Increase tool diameter, pressure support part wall if thin, or consider Bearingizing. |
| | Roll stuck, or foreign matter stuck in pocket. | Inspect and clean cage, replace if necessary. |
| | Roll paths not overlapping. Chips left in bore. | Decrease feed rate. Flush prior to burnishing. |
| 2. SIZE | | |
| A. Too small or large after burnishing. | Incorrect stock allowance. | Adjust cutting tool (resize) and Roll-a-Finish tool. |
| B. Bell mouth or taper. | Premachining problem | Check before burnishing. |
| | Misalignment. | Correct or use floating holder. |
| | Tool runout. Part has thin wall, irregular geometry, or no support. | Indicate mandrel-repair. Support by fixture or consider Bearingizing. |
| 3. (MISC.) | | |
| A. Rolls hit on entry. | Misalignment. | Correct alignment. |
| | Too much roll projection. | Chamfer part-if possible. Retain with O'Ring or similar device if a short bore. Use smaller cage, if interchangeable. Or, select a tool with your part size on the higher end of the adjustment range. |
| B. Can't burnish entire length of bore. | Tool too short. | Use R-style or consider special tool. |
| | Mandrel hits bottom of bore or fixture. | Grind mandrel tip off, use larger tool size, or consider special tool. |

Effects of poorly machined surfaces on burnishing

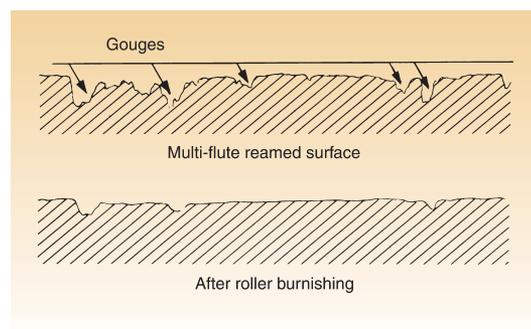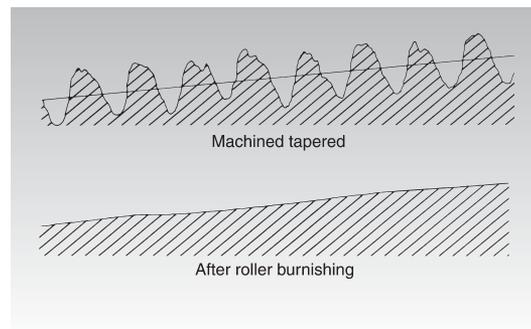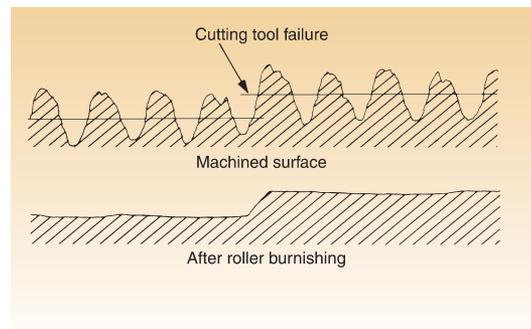

Special applications & tool designs

Specials
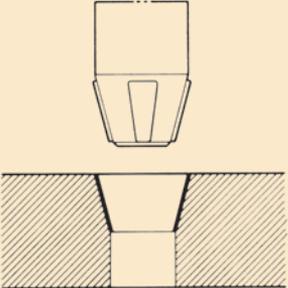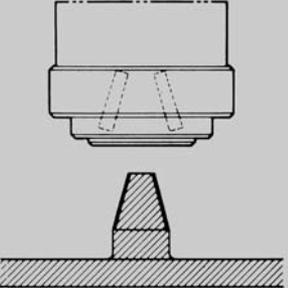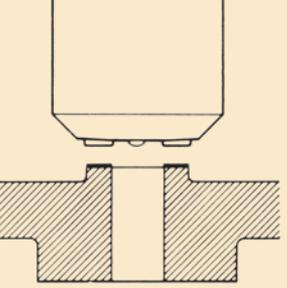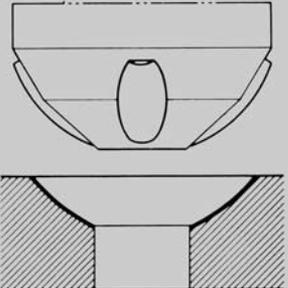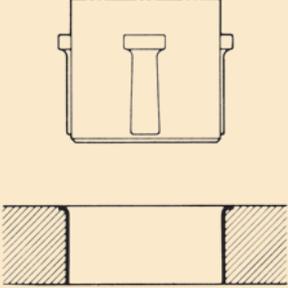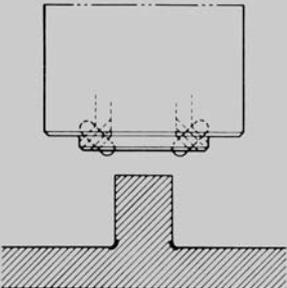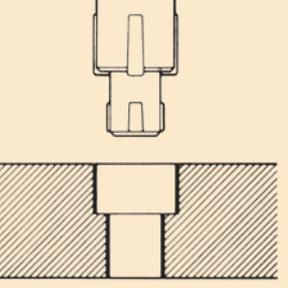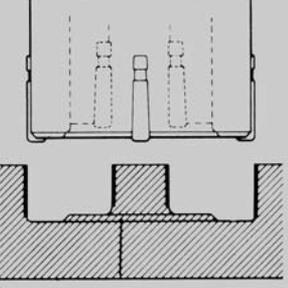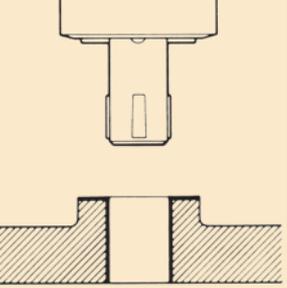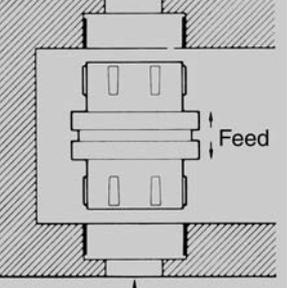
| | | | |
|--|---|--|--|
|  <p>Internal taper</p> |  <p>External taper</p> |  <p>Flat surface</p> | |
|  <p>Spherical surface</p> |  <p>Contour</p> |  <p>Fillet</p> | |
|  <p>Multi-diameters</p> |  <p>Combination ID & OD</p> |  <p>Combination ID & flat surface</p> | |
| <p><i>In addition to our line of standard Roll-A-Finish® tools for IDs and ODs, Cogsdill offers solutions for burnishing virtually any part configuration.</i></p> | | |  <p>Bayonet Drive</p> |

Special applications & tool designs

In 1993 Cogsdill Tool Products acquired The Madison Microller® Product Line. In 2012, Cogsdill acquired the Roll-A-Matic burnishing product line. With the combined experience of over a century of designing and manufacturing burnishing tools and machines, Cogsdill is unquestionably the world leader in special burnishing tool designs and applications engineering.

A few examples of our thousands of special tool designs are shown below:



Where part size varies and surface finish is the primary requirement, expanders, contractors, and compensating tools produce consistently excellent surface finishes.



Send us a part print or detailed sketch and request a quotation.

External roller burnishing machines

CX[®] machines




CX-2000



CX-3000

Machines shown above are not to scale.

Cogsdill's CX machines roller burnish cylindrical diameters of any length in seconds. Parts are sized, finished and work hardened by highly polished, precision rollers in one quick pass. Fatigue life, corrosion resistance and appearance are enhanced as your parts are accurately sized and finished. Various model options are designed to meet your manufacturing requirements. Equipment options are available to accommodate through-feed applications, parts with obstructions, and part-to-part size variations.

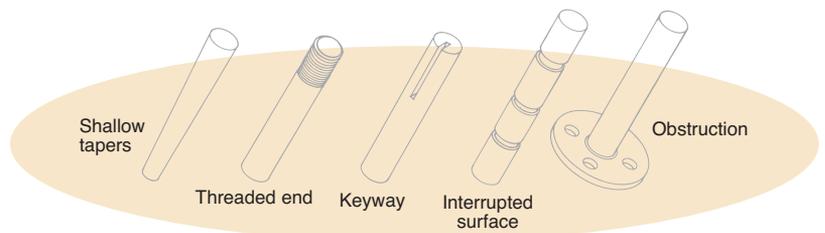

Shown above are examples of various types of parts which are processed by CX external roller burnishing.

Product features

Versatility

All ductile or malleable metals with hardness up to R/C 40 can be roller burnished. Cylindrical parts of any length, bars, tubing, wire and stranded cable may all be processed with Cogsdill's self-contained, self-feeding roller burnishing machines. A continuously variable speed drive allows the operator to select the optimum production rate for obtaining the desired size and finish. An adjustable tilt base makes it possible to select the ideal feed angle for automatic or manual loading.

Several sub-assembly options are available to suit various application requirements (see page 43, "CX Sub-Assembly Options").

Coolant systems are designed and recommended to supply the necessary part lubrication for burnishing. Part supports, consisting of V-guides faced with teflon, are available for thru-feed applications where long parts require support, or as an aid in workpiece alignment during high production runs. Various power options are available to meet your electrical requirements. The CX-2000 is a heavy duty, high production machine that is ideally used where size or portability is a factor. The CX-3000 is a heavy duty, high production machine designed for permanent installation on the production floor.

These options, combined with the standard features, make the Cogsdill CX machine a useful and versatile machine tool. However, should the wide array of options available with our standard tooling and equipment fail to meet your particular requirements, a variety of special tooling is available on special order. Please submit a part print and request a quotation.

Accurate sizing

Tolerances within .0001 inch (.0025mm) are attainable, depending on variables such as material type, hardness, pre-machining method, and the finish on the part prior to burnishing. A prepared tolerance of .002 inch (.05mm) can usually be reduced by 50 % (.001 inch / .02mm).

Low micro finishing

One pass through a Cogsdill CX machine can quickly reduce a 20-40 microinch Ra (0.5 to 1.0 micrometer) ground surface or an 80-120 microinch (2-3 micrometers)(Ra) turned surface to a mirrorlike 5 microinch (.125 micrometer)(Ra) finish or lower. Parts varying in size as much as .005 inch (.127mm) can be burnished to the same low microfinish with the use of an optional pressure control unit (see Versatility section). The roller burnishing process significantly improves bearing surface over other types of finishing processes and is ideal for shafts running in bushings or oil seals.

Work hardening

Surface hardening of the workpiece is achieved simultaneously with sizing and finishing. With certain materials, increases in surface hardness of up to 3 points on the Rockwell "C" scale are attainable. The smooth, dense, hardened surface produced by the roller burnishing process extends wear life, improves resistance to corrosion and reduces fatigue failures. Friction is also reduced, resulting in noise reduction where shafts are running in bushings.

Appearance improvement

Machined parts (turned or ground) can be roller burnished to lustrous, mirrorlike finishes. Subsequent plating applications will often be improved as roller burnishing removes surface patterns and blemishes resulting from prior machining operations.

Fast processing

Cogsdill CX machines process parts in seconds. Parts are sized, finished and work hardened in one pass. Cylindrical parts of any length are processed at speeds up to 30 feet/minute (9.14 meters/minute).

Roller burnishing can often eliminate time consuming and expensive finishing operations such as grinding or lapping. The result is better quality parts, produced in less time, at a lower cost.

Adjustability

Race assemblies, the working components of the CX machine, are designed to process specific nominal size workpieces. CX-1 race assemblies for diameter range .045 to 1.004 inch (1.15 to 25.50mm) are adjustable in increments of .0001 inch (.0025mm) over a range of .021 inch (.53mm) for each nominal size. CX-2 race assemblies for diameter range .963 to 2.504 inch (25.46 to 63.60mm) are adjustable in increments of .0002 inch (.0051mm) over a range of .041 inch (1.04mm) for each nominal size (see pages 40 and 42 for total range of adjustability for each CX model). Race assemblies are interchangeable within the limits of the operating range for a given model. Changing race assemblies is a 5 minute job requiring little more than the removal of four machine screws.

CX-2000 External roller burnishing machine



CX-2000

The CX-2000 External Roller Burnishing Machine offers quiet, smooth operation in a rigid and stable machine design. Two models are available: an adjustable speed model, with variable frequency drive and digital speed display; and an economical fixed speed model (which can be adjusted, if necessary). Coolant capability is standard on both models. An optional portable cabinet with integral coolant pump is offered (and recommended).

The CX-2000 uses the same interchangeable race assemblies as

the CX-3000-1 for part diameters from .045 to 1.004 inch (1.15 to 25.50mm).

An easy-access control panel is located on the front of the machine. There are three standard power options: 220V single-phase, 220V three-phase, or 440V three-phase. An adjustable tilt base allows for the ideal feed angle, from horizontal to vertical, for automatic or manual part loading. Optional part supports are available for long parts or for workpiece alignment in high-production runs.

Height: 16 inches (406mm)

Width: 31 inches (787mm)

Depth: 20 inches (508mm)


CX-2000 External roller burnishing machine




CX-2000 External Roller Burnishing Machine features product design improvements to enhance machine performance.



Interchangeable race assemblies size, finish, and work-harden parts in seconds; through-feed or up to a stop-and release.

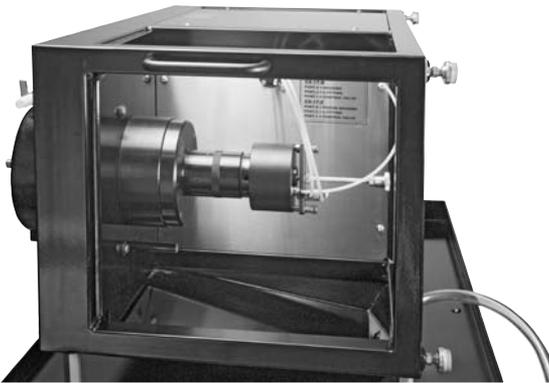

Four sub-assembly options enhance machine versatility (interference-to-a-stop shown).

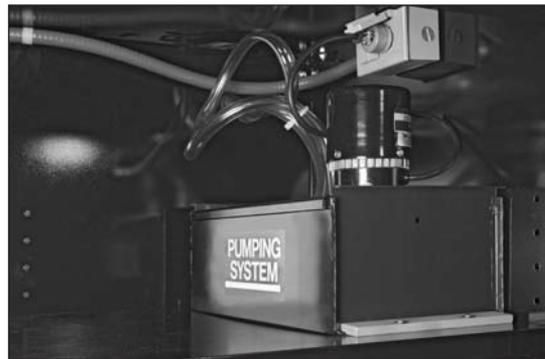

Coolant system lubricates parts and flushes away chips. When optional portable cabinet is purchased, pump comes mounted inside cabinet.



Easy-access control panel is located on the front of the machine.

CX-2000

CX-3000 External roller burnishing machine



CX-3000

The new CX-3000 External Roller Burnishing Machine replaces the former CX-1 and CX-2 model machines. The CX-3000 is designed for permanent installation on the production floor. The CX-3000 machine is available in two models: the CX-3000-1 for part diameters from .045 to 1.004 inch (1.15 to 25.50mm), and the CX-3000-2 for part diameters from .963 to 2.504 inch (25.46 to 63.60mm). The large part diameter range capacity is accomplished by using one base model machine and two interchangeable spindle assemblies

that can be changed by either the customer or by our trained technicians at our factory.

The CX-3000 machine comes standard as an adjustable speed model with variable frequency drive and digital speed display. A coolant system is also standard on the CX-3000 machine.

An easy-access control panel is located on the front of the machine. An adjustable tilt base for ideal feed angle for automatic or manual part loading is available as an option. Part supports are also available as an option for long parts or for

workpiece alignment in high-production runs.

For additional information or to obtain a quotation on the CX-3000 External Roller Burnishing Machine, please contact Cogsdill or one of our Sales Engineers. Also contact Cogsdill for more information on CX Race Assemblies for part diameters over 1.000 inch (25.4mm).

CX sub-assembly options

The CX machine is designed for versatility. Four CX sub-assembly options allow almost any part configuration to be burnished. The machine operates in one of two modes: interference or compensating.

In the interference mode, the working diameter is set slightly smaller (about .0005 inch, or .01mm) than the diameter of the workpiece. The interference mode is used to accurately size and finish parts simultaneously in one fast pass.

The air pressure-controlled compensating unit allows the machine to automatically adjust to different part diameters, within a given range, in order to achieve a surface finish which is consistent regardless of variations in part size. The compensating mode is designed for applications where finish, rather than size, is the primary requirement. The compensating unit can accommodate a size variation of up to .005 inch (.13mm) in a single part, or from part to part. It also allows through-feed burnishing of parts with tapers or enlarged sections where the maximum diameter difference is no more than .030 inch (.76mm).

Each of the two modes is available for through-feed burnishing or with an adjustable stop-and-release mechanism for burnishing parts up to shoulders or obstructions.

The four available CX sub-assemblies are as follows:

- Sub-assembly “A”:
Interference through-feed
- Sub-assembly “B”:
Interference to a stop
- Sub-assembly “C”:
Compensating through-feed
- Sub-assembly “E”:
Compensating to a stop

CX speed and feed recommendations

The information below is intended as a starting point for selecting the speed and feed rate that will produce optimum results in CX® burnishing. Factors such as material type, part configuration, and coolant must be taken into consideration.

Spindle speed is not a critical factor in the successful operation of CX machines. Roller burnishing tools and machines are very tolerant in regard to the effect of spindle speed on resulting surface finishes.

The feed rates are based on using a stationary cage (the part is free to rotate; the anti-rotation spacer is installed). If the thrust bearing is used (i.e., the part is not allowed to rotate) the feed rate will be approximately 1/2 of the feed rate shown.

CX® Speed and feed recommendations

| PART NUMBER | RPM | CX IN./REV. | CX-B IN./REV. | CX-R IN./REV. | CX-RB IN./REV. |
|-------------|------|-------------|---------------|---------------|----------------|
| CX-062 | 1800 | .063 | .031 | .053 | .029 |
| CX-125 | 1800 | .074 | .037 | .068 | .047 |
| CX-187 | 1800 | .084 | .042 | .075 | .037 |
| CX-250 | 1800 | .094 | .047 | .085 | .042 |
| CX-312 | 1800 | .104 | .052 | .095 | .047 |
| CX-375 | 1800 | .115 | .057 | .106 | .053 |
| CX-438 | 1400 | .145 | .072 | .133 | .066 |
| CX-500 | 1400 | .156 | .078 | .144 | .072 |
| CX-562 | 1400 | .166 | .083 | .154 | .077 |
| CX-625 | 1200 | .176 | .088 | .164 | .082 |
| CX-687 | 1200 | .187 | .093 | .175 | .087 |
| CX-750 | 1200 | .197 | .098 | .185 | .092 |
| CX-812 | 1000 | .220 | .111 | .208 | .104 |
| CX-875 | 900 | .233 | .116 | .218 | .109 |
| CX-934 | 900 | .243 | .121 | .228 | .114 |
| CX-1000 | 900 | .254 | .127 | .238 | .119 |

The production rate of the machine can be calculated as follows:

$$\text{PRODUCTION (inches per minute) IPM} = \text{FEED RATE (inches per revolution) IPR} \times \text{SPEED OF THE MOTOR (revolutions per minute) RPM}$$

RACE ASSEMBLY TYPES*: CX: Interference through-feed; CX-B: Interference to a stop; CX-R: Compensating through-feed; CX-RB: Compensating to a stop

*corresponding to sub-assembly options



CX® Race Assemblies

The same race assemblies are used for the CX-2000 and the CX-3000-1 external roller burnishing machines. Those race assemblies are shown below, in both interference and compensating styles.

For information on race assemblies for CX-3000-2 machines, contact Customer Service.

INTERFERENCE-STYLE

| PART NUMBER | DIAMETER RANGE | |
|-------------|----------------|-------------|
| | IN. | MM |
| CX-062 | .045-.066 | 1.14-1.68 |
| CX-078 | .061-.082 | 1.55-2.08 |
| CX-094 | .077-.098 | 1.96-2.49 |
| CX-109 | .092-.113 | 2.34-2.87 |
| CX-125 | .108-.129 | 2.74-3.28 |
| CX-141 | .124-.145 | 3.15-3.68 |
| CX-156 | .139-.160 | 3.53-4.06 |
| CX-171 | .154-.175 | 3.91-4.45 |
| CX-187 | .170-.191 | 4.32-4.85 |
| CX-203 | .186-.207 | 4.72-5.26 |
| CX-219 | .202-.223 | 5.13-5.66 |
| CX-234 | .217-.238 | 5.51-6.05 |
| CX-250 | .233-.254 | 5.92-6.45 |
| CX-266 | .249-.270 | 6.32-6.86 |
| CX-281 | .264-.285 | 6.71-7.65 |
| CX-297 | .280-.301 | 7.11-7.65 |
| CX-312 | .295-.316 | 7.49-8.03 |
| CX-328 | .311-.332 | 7.90-8.43 |
| CX-344 | .327-.348 | 8.31-8.84 |
| CX-359 | .342-.363 | 8.69-9.22 |
| CX-375 | .358-.379 | 9.09-9.63 |
| CX-391 | .375-.395 | 9.53-10.03 |
| CX-406 | .389-.410 | 9.88-10.41 |
| CX-422 | .405-.426 | 10.29-10.82 |
| CX-438 | .420-.441 | 10.67-11.2 |
| CX-453 | .436-.457 | 11.07-11.61 |
| CX-469 | .452-.473 | 11.48-12.01 |
| CX-484 | .467-.488 | 11.86-12.4 |
| CX-500 | .483-.504 | 12.27-12.8 |
| CX-516 | .499-.520 | 12.68-13.21 |
| CX-531 | .514-.535 | 13.06-13.59 |

| PART NUMBER | DIAMETER RANGE | |
|-------------|----------------|-------------|
| | IN. | MM |
| CX-547 | .530-.551 | 13.46-14.00 |
| CX-562 | .545-.566 | 13.84-14.38 |
| CX-578 | .561-.582 | 14.25-14.78 |
| CX-594 | .577-.598 | 14.56-15.19 |
| CX-609 | .592-.613 | 15.03-15.57 |
| CX-625 | .608-.629 | 15.44-15.98 |
| CX-641 | .624-.645 | 15.85-16.38 |
| CX-656 | .639-.660 | 16.23-16.76 |
| CX-672 | .655-.676 | 16.64-17.17 |
| CX-688 | .671-.692 | 17.04-17.58 |
| CX-703 | .686-.707 | 17.42-17.96 |
| CX-719 | .702-.723 | 17.83-18.36 |
| CX-734 | .717-.738 | 18.21-18.75 |
| CX-750 | .733-.754 | 18.62-19.15 |
| CX-766 | .749-.770 | 19.03-19.56 |
| CX-781 | .764-.785 | 19.41-19.94 |
| CX-797 | .780-.801 | 19.81-20.35 |
| CX-812 | .795-.816 | 20.19-20.73 |
| CX-828 | .811-.832 | 20.60-21.13 |
| CX-844 | .827-.848 | 21.01-21.54 |
| CX-859 | .842-.863 | 21.39-21.92 |
| CX-875 | .858-.879 | 21.79-22.33 |
| CX-891 | .874-.895 | 22.20-22.73 |
| CX-906 | .889-.910 | 22.58-23.11 |
| CX-922 | .905-.926 | 22.98-23.52 |
| CX-938 | .921-.942 | 23.39-23.93 |
| CX-953 | .936-.957 | 23.77-24.31 |
| CX-969 | .952-.973 | 24.18-24.71 |
| CX-984 | .967-.988 | 24.56-25.10 |
| CX-1000 | .983-1.004 | 24.97-25.50 |

COMPENSATING-STYLE

| PART NUMBER | DIAMETER RANGE | |
|-------------|----------------|-------------|
| | IN. | MM |
| CX-062 | .058-.070 | 1.47-1.78 |
| CX-078 | .074-.095 | 1.88-2.41 |
| CX-094 | .090-.111 | 2.29-2.82 |
| CX-109 | .105-.126 | 2.67-3.20 |
| CX-125 | .121-.142 | 3.07-3.61 |
| CX-141 | .137-.158 | 3.48-4.01 |
| CX-156 | .152-.173 | 3.86-4.39 |
| CX-171 | .167-.188 | 4.24-4.78 |
| CX-187 | .183-.204 | 4.65-5.18 |
| CX-203 | .199-.220 | 5.06-5.59 |
| CX-219 | .215-.236 | 5.46-5.99 |
| CX-234 | .230-.251 | 5.84-6.38 |
| CX-250 | .246-.267 | 6.25-6.78 |
| CX-266 | .262-.283 | 6.66-7.19 |
| CX-281 | .277-.298 | 7.04-7.57 |
| CX-297 | .293-.314 | 7.44-7.98 |
| CX-312 | .308-.329 | 7.82-8.36 |
| CX-328 | .324-.345 | 8.23-8.76 |
| CX-344 | .340-.361 | 8.64-9.17 |
| CX-359 | .355-.376 | 9.02-9.55 |
| CX-375 | .371-.392 | 9.42-9.96 |
| CX-391 | .387-.408 | 9.83-10.36 |
| CX-406 | .402-.423 | 10.21-10.74 |
| CX-422 | .418-.437 | 10.62-11.10 |
| CX-438 | .434-.455 | 11.02-11.56 |
| CX-453 | .449-.470 | 11.41-11.94 |
| CX-469 | .465-.486 | 11.81-12.34 |
| CX-484 | .480-.501 | 12.19-12.73 |
| CX-500 | .496-.517 | 12.60-13.13 |
| CX-516 | .512-.533 | 13.01-13.54 |
| CX-531 | .527-.548 | 13.39-13.92 |

| PART NUMBER | DIAMETER RANGE | |
|-------------|----------------|-------------|
| | IN. | MM |
| CX-547 | .543-.564 | 13.79-14.33 |
| CX-562 | .558-.579 | 14.17-14.71 |
| CX-578 | .574-.595 | 14.58-15.11 |
| CX-594 | .590-.611 | 14.99-15.52 |
| CX-609 | .605-.626 | 15.37-15.90 |
| CX-625 | .612-.642 | 15.55-16.31 |
| CX-641 | .637-.658 | 16.18-16.71 |
| CX-656 | .652-.673 | 16.56-17.09 |
| CX-672 | .668-.689 | 16.97-17.50 |
| CX-688 | .684-.705 | 17.37-17.91 |
| CX-703 | .699-.720 | 17.76-18.29 |
| CX-719 | .715-.736 | 18.16-18.69 |
| CX-734 | .730-.751 | 18.54-19.08 |
| CX-750 | .746-.767 | 18.95-19.48 |
| CX-766 | .762-.783 | 19.36-19.89 |
| CX-781 | .777-.798 | 19.74-20.27 |
| CX-797 | .793-.814 | 20.14-20.68 |
| CX-812 | .808-.829 | 20.52-21.06 |
| CX-828 | .824-.845 | 20.93-21.46 |
| CX-844 | .840-.861 | 21.34-21.87 |
| CX-859 | .855-.876 | 21.72-22.25 |
| CX-875 | .871-.892 | 22.12-22.66 |
| CX-891 | .887-.908 | 22.53-23.06 |
| CX-906 | .902-.923 | 22.91-23.44 |
| CX-922 | .918-.939 | 23.32-23.85 |
| CX-938 | .934-.955 | 23.72-24.26 |
| CX-953 | .949-.970 | 24.11-24.64 |
| CX-969 | .965-.986 | 24.51-25.04 |
| CX-984 | .980-1.001 | 24.89-25.43 |
| CX-1000 | .996-1.017 | 25.30-25.83 |

Diamond burnishing tools

For producing low microinch finishes on shafts or faces of any diameter, or on large bores.

- *Four designs allow use on most turning machines, manual or CNC*
- *Replaceable, polished diamond insert*
- *Adjustable for optimum burnishing pressure*



Cogsdill Diamond Burnishing Tools are simple, efficient tools designed to produce mirror-like finishes on a wide range of ferrous and non-ferrous part surfaces on most turning machines.

Set up and cycle times are short, even for unskilled operators. In all cases, the replaceable diamond insert can be changed quickly; on some models without removing the tool holder from the machine.

Four tool designs to suit your application requirements:

- **DB-1** For general purpose machining
- **DB-2** For use where work length is restricted
- **DB-3 and DB-4** For use on CNC machining centers - the tool holders are offset so that the diamond insert is on center


The Cogsdill Diamond Burnishing Tool is designed to produce high quality, low microinch burnished finishes on shafts, large bores, and faces. With most metals, a turned or ground part with a properly prepared 40 to 60 microinch finish can be burnished to a 4 to 8 microinch finish in seconds. Cast iron can usually be burnished to an 8 to 15 microinch finish.

Cogsdill Diamond Burnishing Tools can burnish virtually any size stock; from carbon steels to tool steels, cast iron to alloys, and most ferrous and non-ferrous metals. The premium quality diamond burnishing insert is polished and contoured to provide superior finishes and excellent tool life.

Since set up and operation is relatively simple, no special operator skills are required. Diamond Burnishing Tools are versatile . . . various models are designed for use

in the tool post of a manual lathe, automatic, or in CNC equipment. The tools can be used on both large and small diameters, and are ideal for short production runs. The Diamond Burnishing Tool can produce quality finishes on interrupted surfaces, such as a shaft with a keyway or the face of a flange having a series of bolt holes.

While the tool must be used with coolant, no special coolant is required. Straight oils, soluble oils, and synthetic coolants can be used to provide the necessary lubrication.

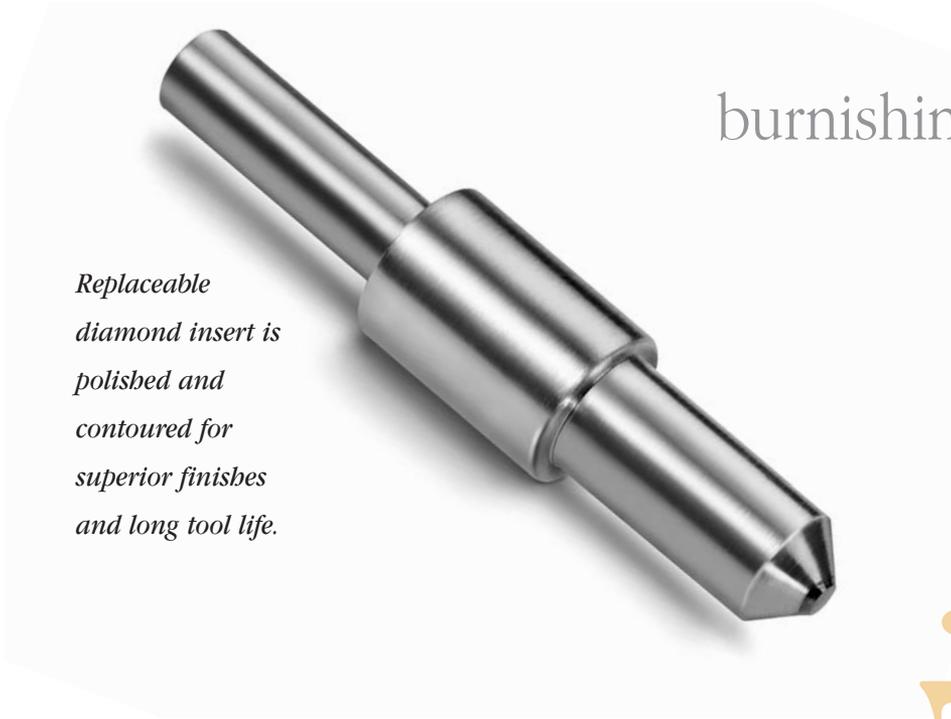

Replaceable diamond insert is polished and contoured for superior finishes and long tool life.

burnishing tools

diamond

How it works

The Cogsdill Diamond Burnishing Tool is mounted in the tool post of the desired machine. The diamond burnishing point is brought into contact with the workpiece at the centerline of the part and perpendicular to the surface being finished. The tool is then fed into the workpiece an additional .002 or .003 inch (.05 or .08mm) to allow the diamond insert to become disengaged from the stop in the holder. The spring, with its preload, forces the diamond against the workpiece. The tool is then fed along the surface of the rotating workpiece to produce a mirrorlike finish.

As a recommended starting point the adjusting screw should be tightened (turn clockwise) until all clearance between the push rod and the spring is removed. Then tighten the screw another 1 to 2 turns which will compress the spring to provide the necessary preload to the diamond insert. This is the recommended starting point for mild

steel. Slight adjustments in the burnishing pressure can be made, if necessary, to achieve the optimum finish. To adjust the burnishing pressure, tighten the adjustment screw to increase pressure or loosen the screw (turn counterclockwise) to reduce the pressure.


The prefinish on most metals should be approximately 40 to 60 R.M.S. for best results. A feed rate of .003 to .004 inches (.076 to .102mm) per revolution at speeds up to 750 surface feet per minute (229 surface meters per minute) is generally recommended when using the Cogsdill Diamond Burnishing Tool.

Normally, after the tool has been set to provide the .002 to .003 inch (.05 to .08mm) "interference", it can be fed onto the rotating work-piece and allowed to feed off. The slight radius of the diamond tip is sufficient to cause the tool to "climb over" the edge of the part and begin its burnishing action. Likewise, if an interrupted surface is burnished,

such as a shaft with a keyway or a flange with bolt holes, the tip of the tool will drop into the interruption but "climb up" the other edge due to the radius on the diamond.





CAUTION: It is important NOT to exceed the recommended amount of interference. An excessive projection of the diamond insert into any surface interruption could cause tool breakage, as the diamond insert could not perform its "climbing" action. (Note: Adjustment of the burnishing force does not affect the amount of interference.)

Note: Diamond burnishing tools do not have the advantage of an overlapping effect as with multi-roll tools, and for this reason slower feed rates and/or multiple passes over the part may be required in order to produce the desired finish.

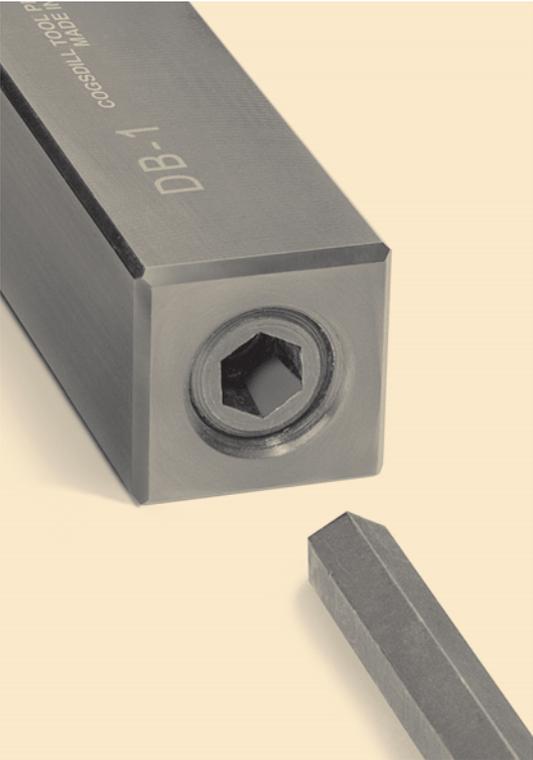

Diamond Burnishing Tools are adjustable for optimum burnishing pressure. For the DB-1 and DB-2 models, the adjustment screw is located in the end of the tool. For models DB-3 and DB-4, the adjustment screw is located on the side of the tool.


Standard tool specifications

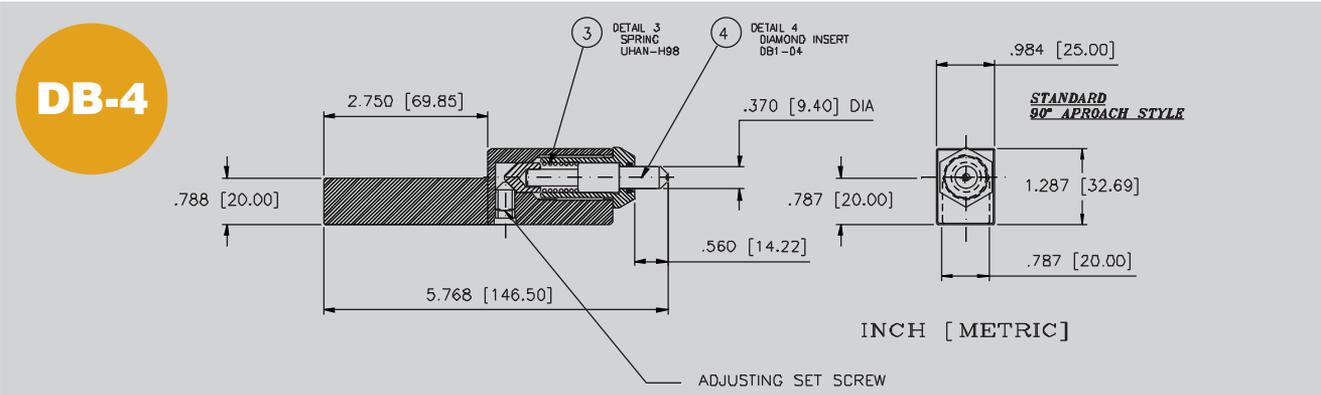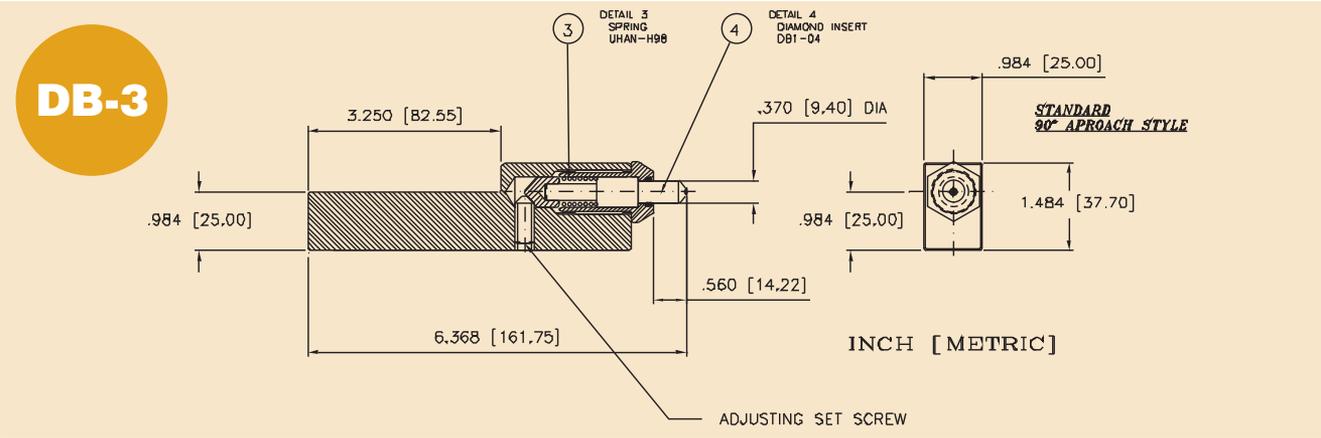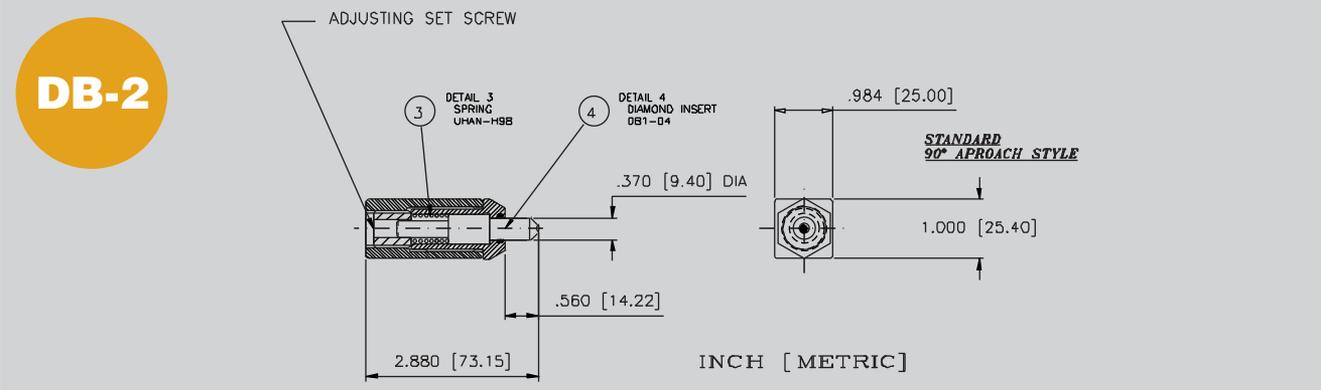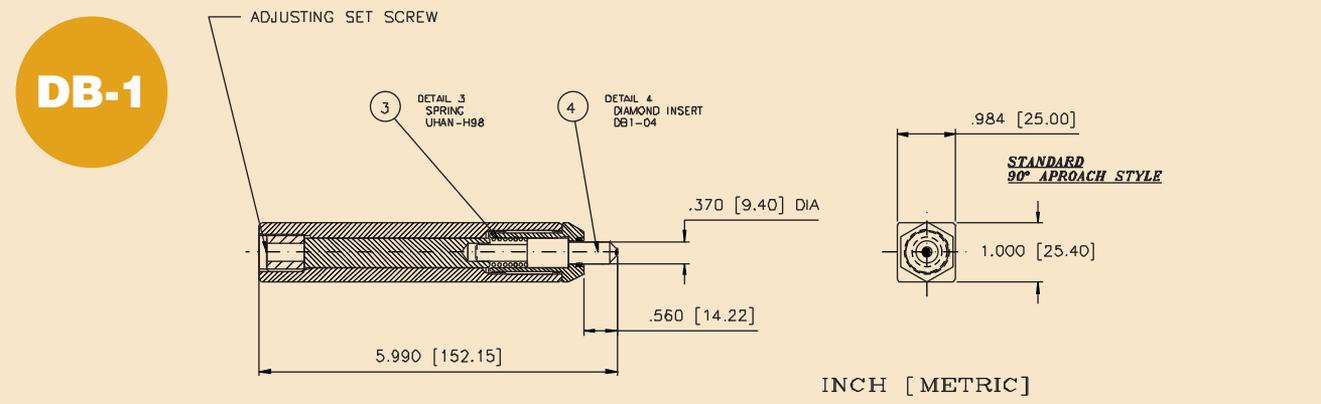

Universal™ burnishing tools

*For burnishing shafts, faces, tapers,
contours, and relatively large IDs
(greater than 2.750 inches/69.85mm)*

- *Boring-bar style and Indexable turning-holder style designs*
- *Tool designs to suit any part size or configuration, or any turning machine*
- *Low surface finishes*
- *Standard, available off-the-shelf*
- *Adjustable for optimum burnishing pressure*
- *Hardened steel or carbide rollers*

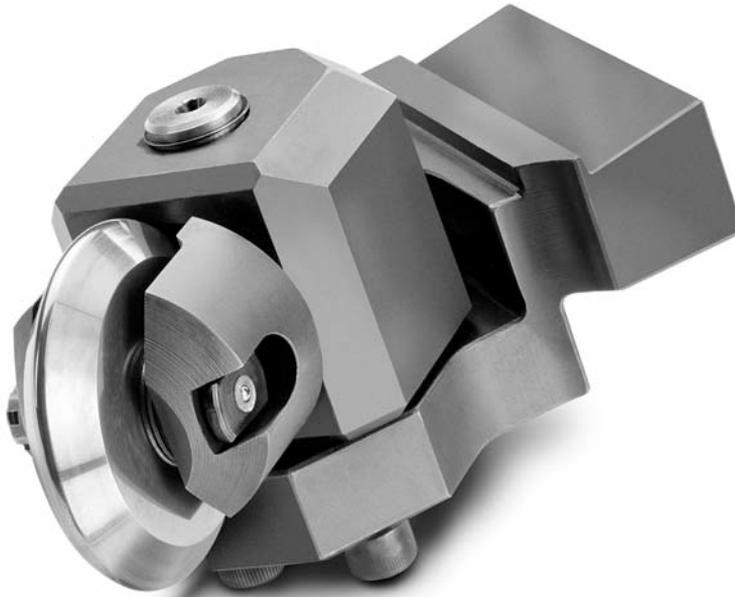


UBT-T indexable turning holder-style burnishing tool

(Left-hand tool shown)



UBT-B1 boring bar-style burnishing tool

Versatility

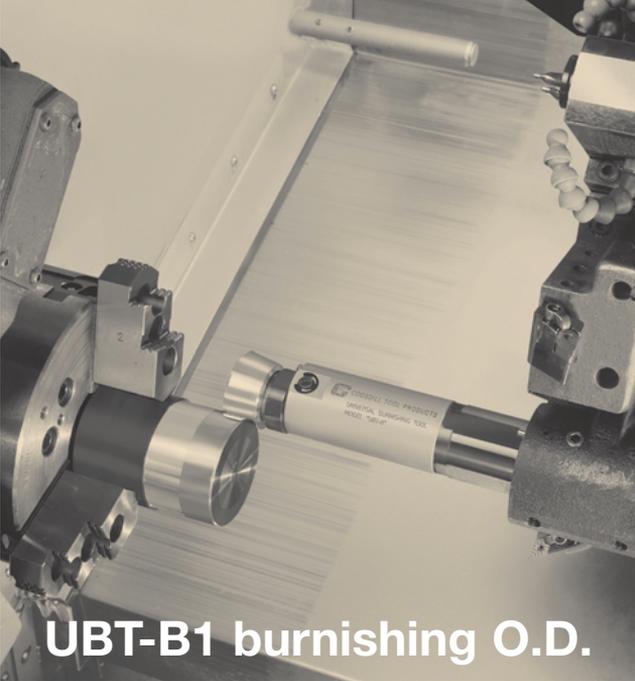

Burnish
any size, any
configuration,
on any turning
machine.

Turning-holder style



UBT-T1



UBT-T2



UBT-T2 with force gauge



UBT-T3

Roll shield not installed



UBT-T3 with force gauge

Roll shield not installed





Roll shield installed above

Turning-holder style



UBT-T1



FOR
 BURNISHING OUTSIDE
 DIAMETERS, FACES,
 TAPERS, AND
 CONTOURS

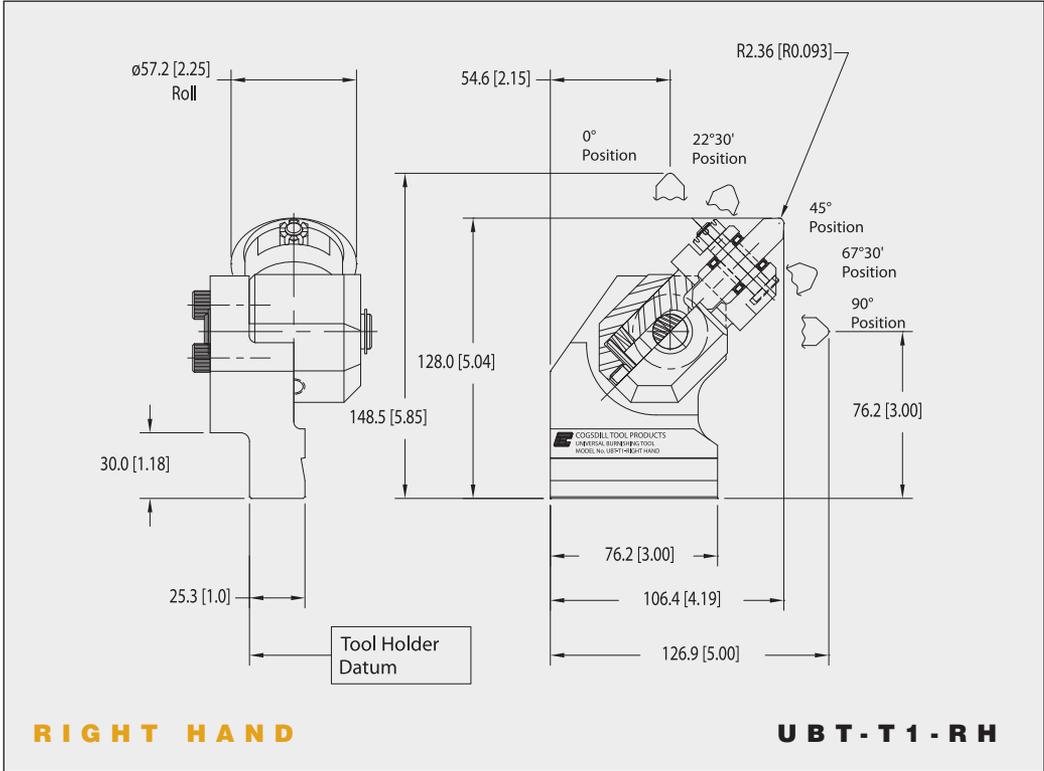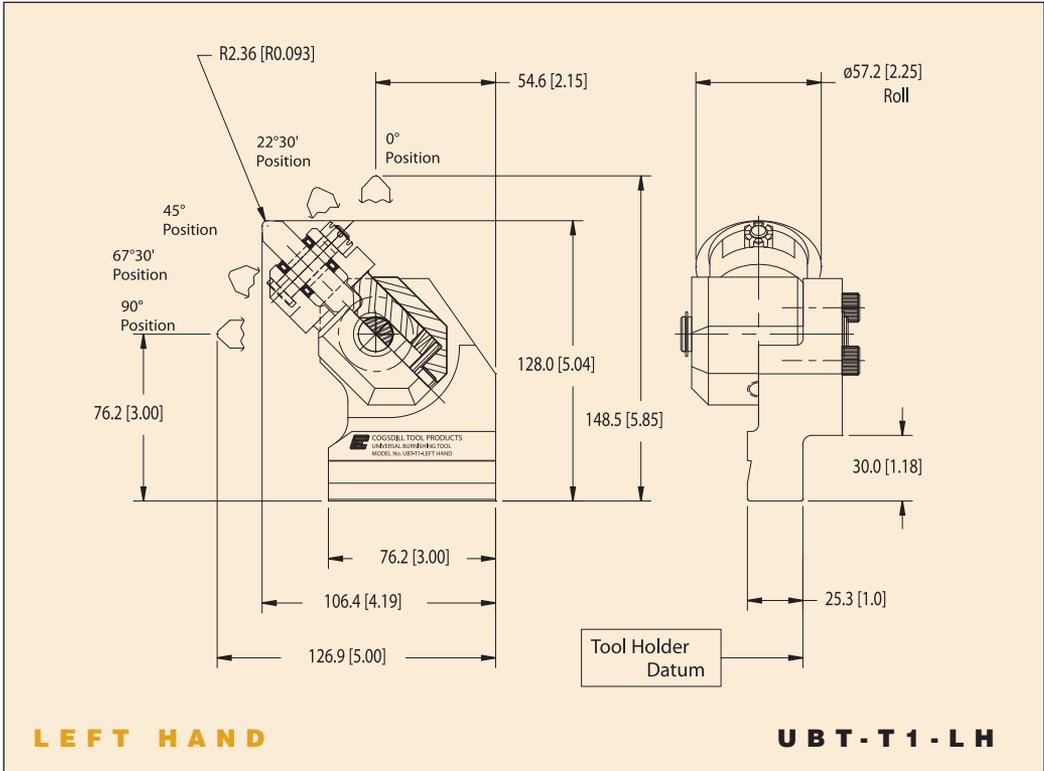

Turning-holder style

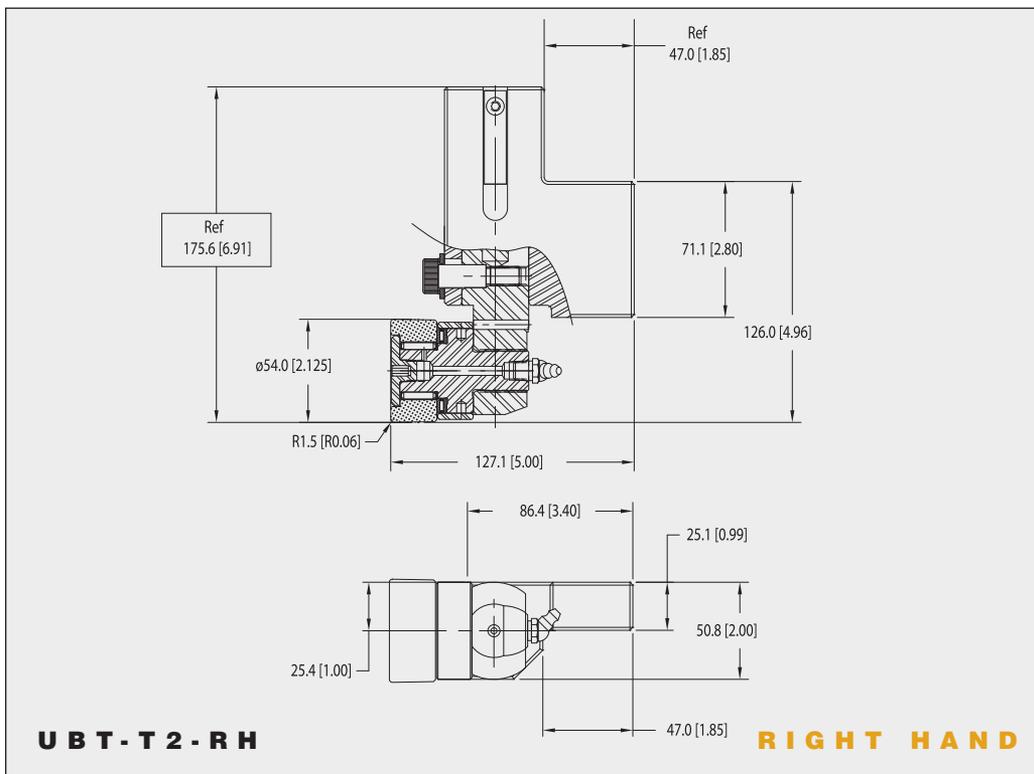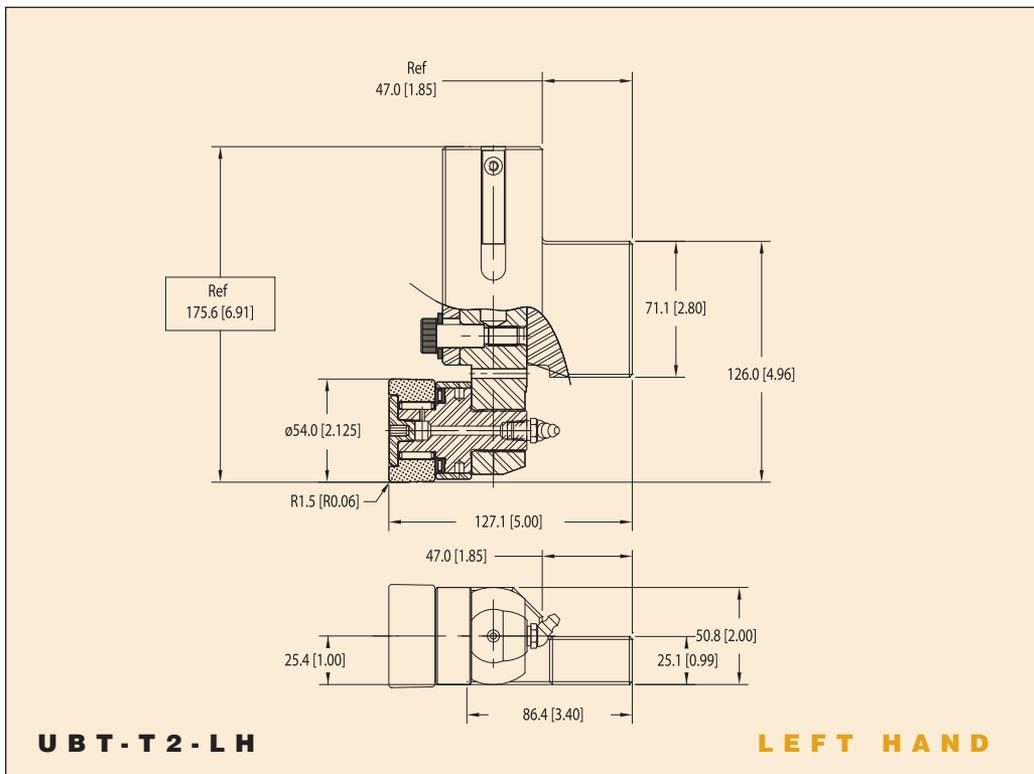

UBT-T2

▼



FOR
BURNISHING
OUTSIDE
DIAMETERS

Turning-holder style

UBT-T3



FOR
 BURNISHING LARGE
 OUTSIDE DIAMETERS,
 (GREATER THAN
 100mm/4.00 in.)

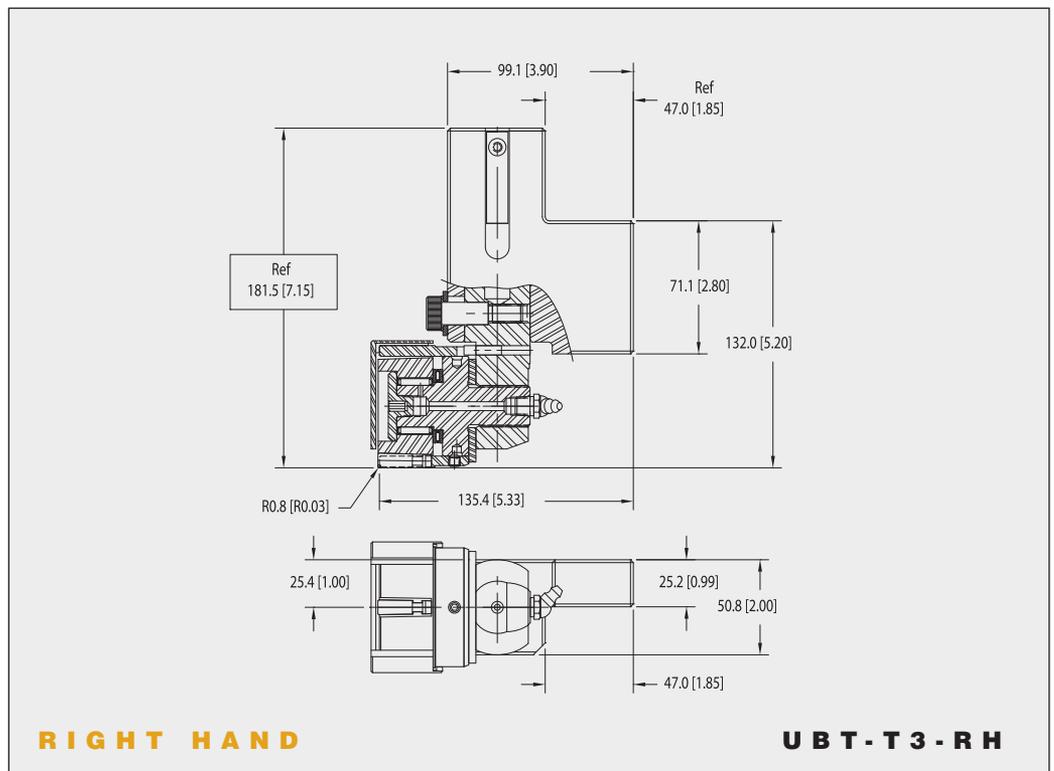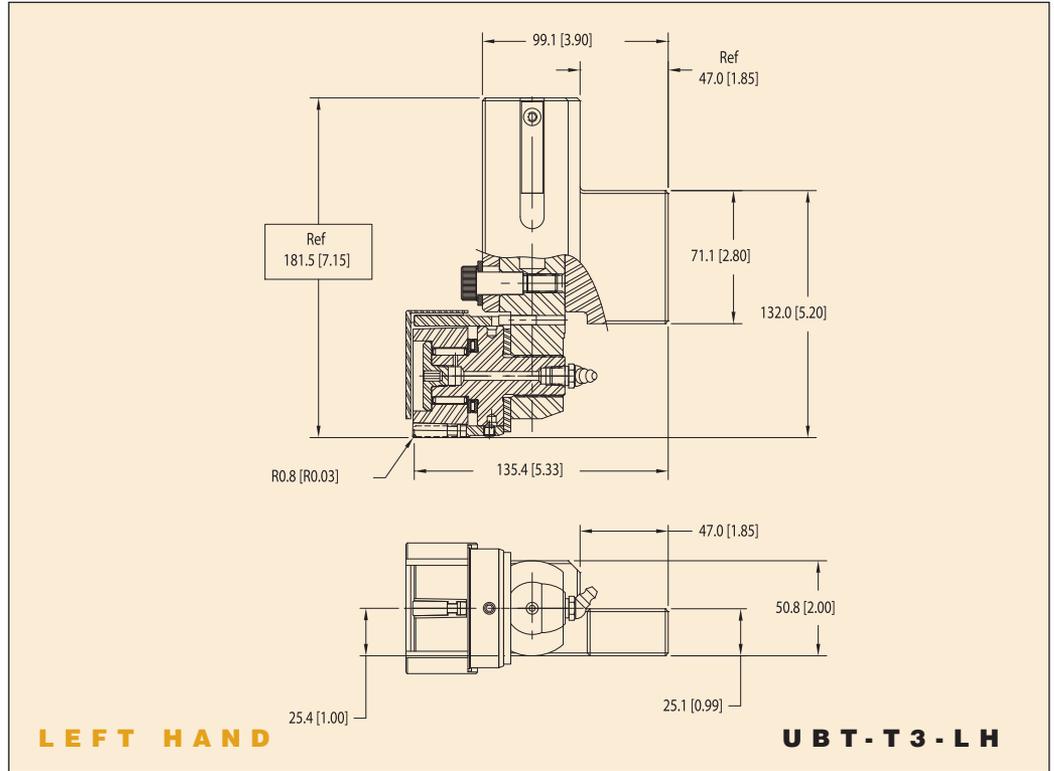

Set-up and operating instructions for UBT-T Tools


Note: UBT™ single-roll burnishing tools do not have the advantage of an overlapping effect as with multi-roll tools, and for this reason slower feed rates and/or multiple passes over the part may be required in order to produce the desired finish.

UBT1 tool set-up

Loosen the load *adjusting screw*. Retighten the *adjusting screw* until it comes into contact with the spring. Continue to tighten screw 1/2 turn past snug. This is a recommended starting point for mild steel.

Adjustments can be made to the burnishing force to achieve optimum finish. Tighten the *adjusting screw* clockwise one turn to increase the burnishing force, or counterclockwise to reduce the force.

Roll orientation is adjustable in 22°-30' increments. Loosen *mounting screws* two turns. Lift *housing* from *shank*. Rotate to desired position, making sure castellations are engaged. Tighten *mounting screws*.

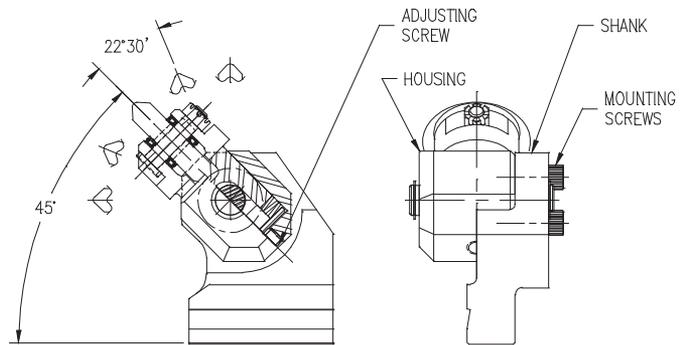


Left hand style shown

UBT2 tool set-up

Loosen the load *adjusting screw*. Retighten the *adjusting screw* until it comes into contact with the spring. Continue to tighten screw four turns past snug. This is a recommended starting point for mild steel.

Adjustments can be made to the burnishing force to achieve optimum finish. Tighten the *adjusting screw* clockwise to increase the burnishing force, six turns total, or counterclockwise to reduce the force.

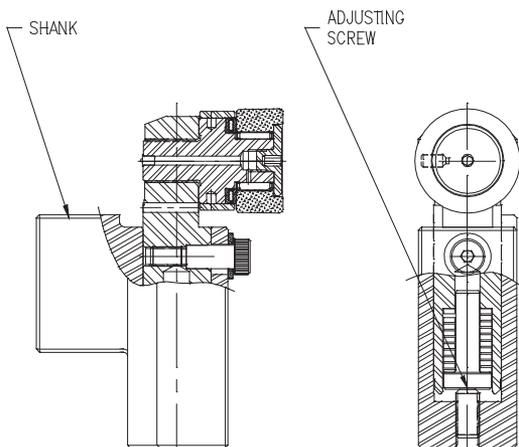


Left hand style shown

UBT3 tool set-up


Loosen the load *adjusting screw*. Retighten the *adjusting screw* until it comes into contact with the spring. Continue to tighten screw two turns past snug. This is a recommended starting point for mild steel.

Adjustments can be made to the burnishing force to achieve optimum finish. Tighten the load *adjusting screw* clockwise to increase the burnishing force, six turns total, or counterclockwise to reduce the force.

To index to a new roll station, pull off *cover*. Loosen *locking screws* and slide *cage* forward approximately 0.157 (4.0mm) until it disengages from *pin*. Rotate *cage* approximately 60°, until *pin* aligns with slot in *cage*, and push back. Tighten locking screws and replace *cover* in position shown.

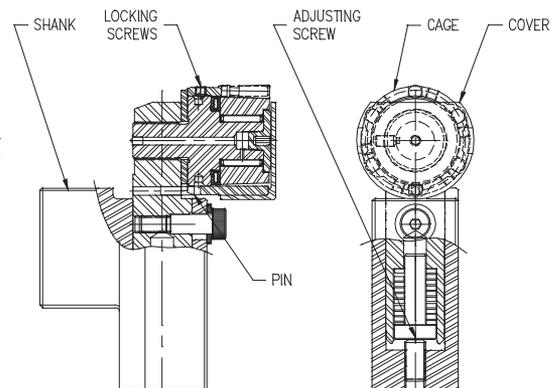

Left hand style shown

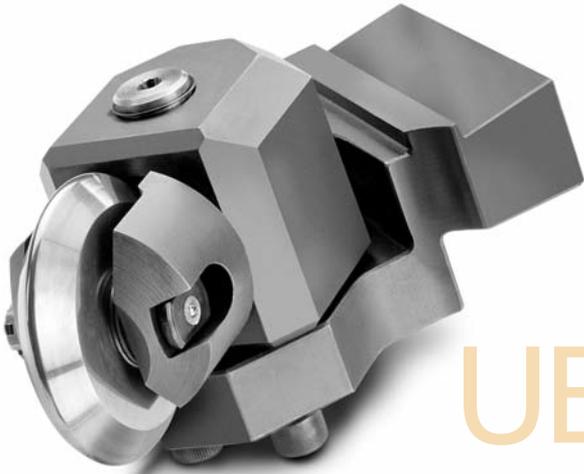

UBT-T TOOLS

Set-up and operating instructions for UBT-T tools

UBT-T tool operation

Mount any UBT-T tool in the desired turning station. Use a UBT-T tool that corresponds with the respective turning tool. Bring the tool into contact with the part to be burnished; contact has occurred when you see the mandrel rotating.

Feed the tool another 0.003-0.005 inch (0.08-0.13mm) into the part to provide interference between the roll

and part so that the roll will float in its spring travel. Interference should not be used to increase burnishing force; burnishing force should only be adjusted with the load adjusting screws. This ensures the tool can be fed on/off the part and across interruptions without damage to the tool or workpiece.

For optimum results and long tool

life, coolant is required. Any soluble, synthetic, or straight oil can be used. Whenever possible, and for best results, the tool should be fed towards the spindle when burnishing diameters and towards the centerline when burnishing faces. (Note: UBT-T2 and UBT-T3 tools cannot be used to burnish faces.)

ROLLS FOR UBT-T TOOLS

| ITEM NO. | TOOL TYPE | ROLL TYPE & RADIUS |
|----------------|-----------|-----------------------------------|
| UBT-006 | UBT-T1 | HARDENED STEEL, .093 IN. (2.36MM) |
| UBT-007 | UBT-T1 | HARDENED STEEL, .030 IN. (0.76MM) |
| UBT-010 | UBT-T1 | CARBIDE, .093 IN. (2.36MM) |
| UBT-015 | UBT-T2 | HARDENED STEEL, .060 IN. (1.52MM) |
| UBT-016 | UBT-T2 | CARBIDE, .060 IN. (1.52MM) |
| 6100-708-00312 | UBT-T3 | HARDENED STEEL, .030 IN. (0.76MM) |

Speed and feed recommendations for UBT-T tools

| SPEED | |
|-------|--------|
| SFM | M/MIN. |
| 750 | 230 |

| FEED | |
|-------------|-----------|
| IPR | MM/REV. |
| 0.001/0.006 | 0.02/0.15 |

Lubrication of UBT-T tools

All UBT-T tools should be periodically greased (approximately every 24 hours of operation). We recommend the use of high-quality Lithium complex grease.

UBT-T Tools with force gauge

- *Adaptable to all new UBFT2 and UBFT3 tools.*
- *Gauge available in English units (pounds) or metric units (newtons).*



UBT-T2 with gauge

COMPLETE TOOL

| | |
|--------------|----------------------------------|
| UBT-T2-LH-GS | LH TOOL W/ENGLISH (POUNDS) GAUGE |
| UBT-T2-LH-GM | LH TOOL W/METRIC (NEWTONS) GAUGE |
| UBT-T2-RH-GS | RH TOOL W/ENGLISH (POUNDS) GAUGE |
| UBT-T2-RH-GM | RH TOOL W/METRIC (NEWTONS) GAUGE |

GAUGE ASSEMBLY

| | |
|---------------|---------------------------|
| UBT-T2-LH-GSA | LH ENGLISH (POUNDS) GAUGE |
| UBT-T2-LH-GMA | LH METRIC (NEWTONS) GAUGE |
| UBT-T2-RH-GSA | RH ENGLISH (POUNDS) GAUGE |
| UBT-T2-RH-GMA | RH METRIC (NEWTONS) GAUGE |

LH- LEFT HAND RH - RIGHT HAND



UBT-T3 with gauge

COMPLETE TOOL

| | |
|--------------|----------------------------------|
| UBT-T3-LH-GS | LH TOOL W/ENGLISH (POUNDS) GAUGE |
| UBT-T3-LH-GM | LH TOOL W/METRIC (NEWTONS) GAUGE |
| UBT-T3-RH-GS | RH TOOL W/ENGLISH (POUNDS) GAUGE |
| UBT-T3-RH-GM | RH TOOL W/METRIC (NEWTONS) GAUGE |

GAUGE ASSEMBLY

| | |
|---------------|---------------------------|
| UBT-T3-LH-GSA | LH ENGLISH (POUNDS) GAUGE |
| UBT-T3-LH-GMA | LH METRIC (NEWTONS) GAUGE |
| UBT-T3-RH-GSA | RH ENGLISH (POUNDS) GAUGE |
| UBT-T3-RH-GMA | RH METRIC (NEWTONS) GAUGE |

LH- LEFT HAND RH - RIGHT HAND

UBT-T Tools force gauge assembly




UBT-T force gauge assembly

- For use on UBFT2 and UBFT3 tools.
- Available with English (pounds) or metric (newtons) gauge.
- Two mounting brackets are supplied with the gauge assembly allowing mounting of the gauge on either side of the tool offering optimum viewing of the gauge.

UBT-T force gauge adjustment procedure

UBFT gauge adjustment

- Adjust **load adjusting screw** to touch internal spring.
- Set indicator to “0” with **zero indicator screw**.
- Tighten **load adjusting screw** until desired load is shown on indicator.
- Touch off on part.
- Compress tool onto part approximately 5 pounds (22 newtons) as shown on the indicator.

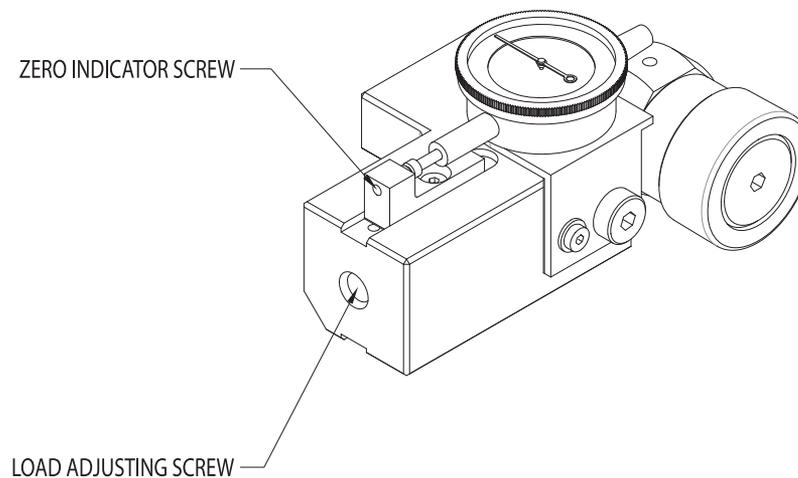

Boring-bar style



UBT-B1



UBT-B2




UBT-B3




Roll shield installed above

Boring-bar style

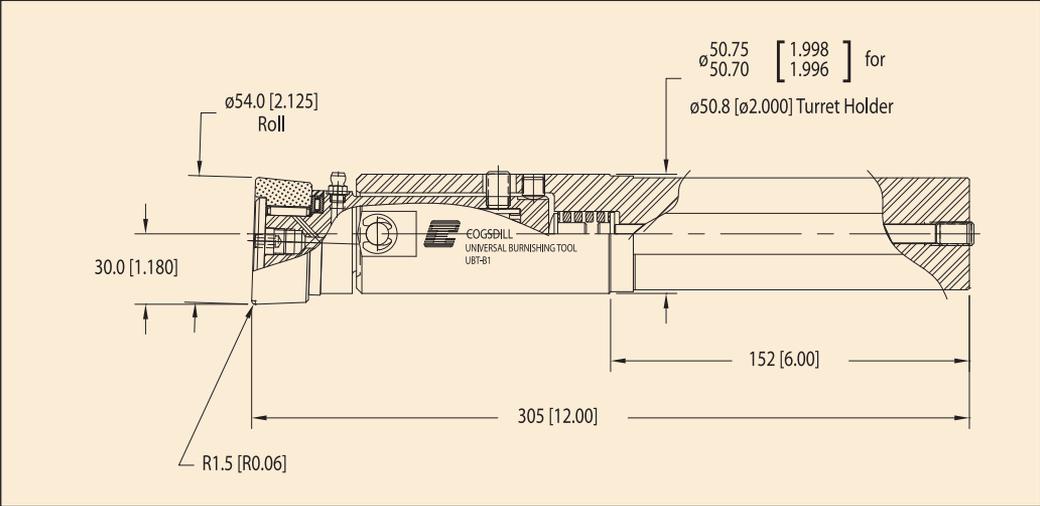


UBT-B1

FOR BURNISHING
OUTSIDE DIAMETERS,
FACES, AND LARGE INSIDE
DIAMETERS (ID'S GREATER
THAN 70mm/2.75 in.)

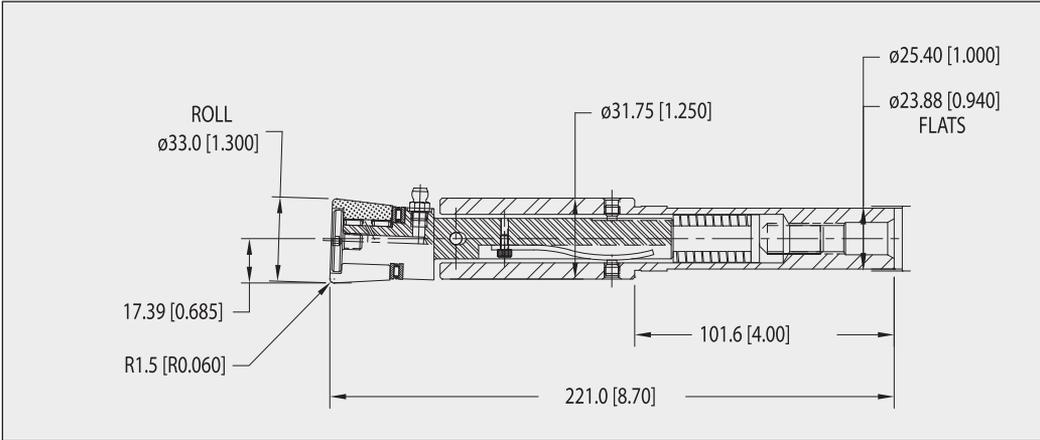

UBT-B2

A SMALLER VERSION
OF THE UBT-B1
(ID'S GREATER THAN
39.6mm/1.56 in.)

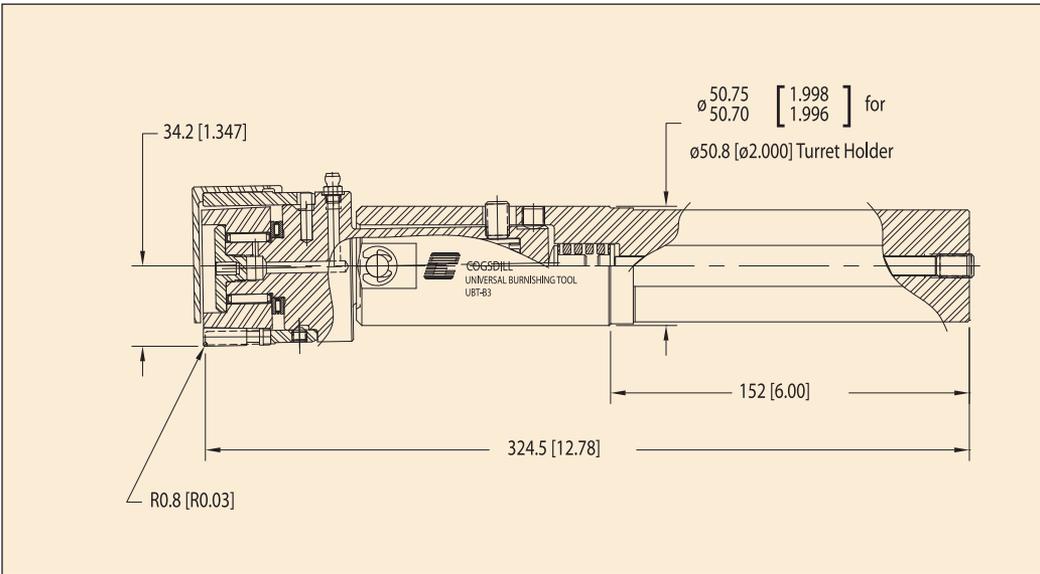

UBT-B3

FOR USE IN SMALLER INSIDE
DIAMETERS (IDS GREATER
THAN 70MM/2.75 in.) OR ON
LARGE OUTSIDE DIAMETERS
(GREATER THAN
100mm/4.00in.)


Set-up and operating instructions for UBT-B Tools

Note: UBT™ single-roll burnishing tools do not have the advantage of an overlapping effect as with multi-roll tools, and for this reason slower feed rates and/or multiple passes over the part may be required in order to produce the desired finish.

UBT-B1 tool set-up

Loosen the load *adjusting screws*. Retighten the *adjusting screws* until they come into contact with the spring. Continue to tighten both screws one turn past snug. This is a recommended starting point for mild steel.

Adjustments can be made to the burnishing force to achieve optimum finish. Tighten the *adjusting screws* clockwise to increase the burnishing force, three turns total, or counterclockwise to reduce the force.

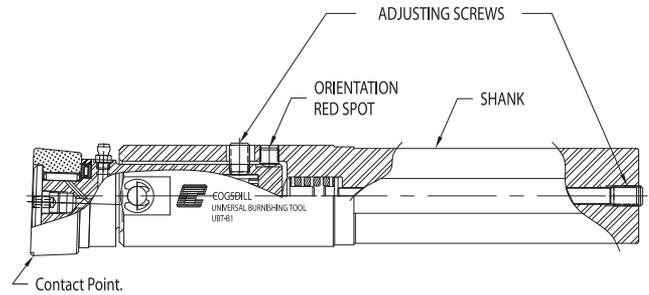


UBT-B2 tool set-up

Loosen the load *adjusting screws*. Retighten the *axial adjusting screw* until it comes into contact with the spring. Continue to tighten three turns past snug. This is a recommended starting point for mild steel.

Tighten the *radial adjusting screw* until it comes into contact with the spring. Continue to tighten 1-1/2 turns past snug. Do not tighten beyond this point; overloading this screw will not allow the tool to float on its spring travel and will impede tool function.

Adjustments can be made to the burnishing force to achieve optimum finish. Tighten the *axial adjusting screw* only. Turn clockwise to increase burnishing force, for a total of 6-1/2 turns, or counterclockwise to reduce the force.

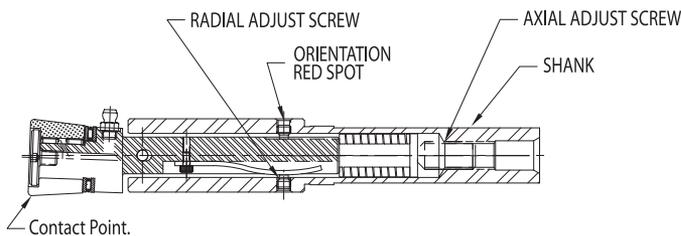


UBT-B3 tool set-up

Loosen the load *adjusting screws*. Retighten the *adjusting screws* until they come into contact with the spring. Continue to tighten both screws one turn past snug. This is a recommended starting point for mild steel.

Adjustments can be made to the burnishing force to achieve optimum finish. Tighten the *adjusting screws* clockwise to increase the burnishing force, for a total of three turns, or counterclockwise to reduce the force.

To index to a new roll station, pull off *cover*. Loosen *locking screws* and slide *cage* forward approximately 0.157 (4.0mm) until it disengages from *pin*. Rotate *cage* approximately 60°, until *pin* aligns with slot in *cage*, and push back. Tighten *locking screws* and replace *cover* in position, exposed *roll* opposite orientation red spot.

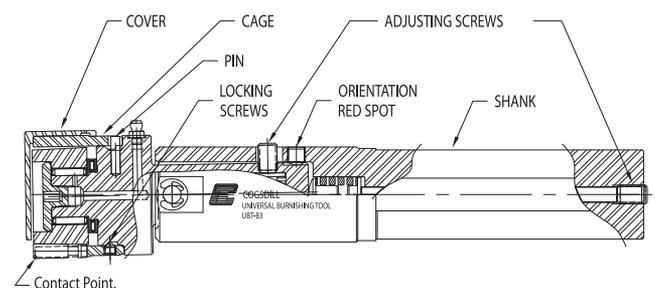



UBT-B TOOLS

Set-up and operating instructions for UBT-B tools

UBT-B tool operation

Mount any UBT-B tool in the desired boring bar station. (Note: The red orientation spot *must* be opposite the contact point.) Bring the tool into contact with the part to be burnished.

Feed the tool another 0.003-0.005 inch (0.08-0.13mm) into the part to provide interference between the roll and part so that the roll will float in

its spring travel. Interference should not be used to increase burnishing force; burnishing force should only be adjusted with the load adjusting screws. This ensures the tool can be fed on/off the part and across interruptions without damage to the tool or workpiece.

For optimum results and long tool life, coolant is required. Any soluble,

synthetic, or straight oil can be used. Whenever possible, and for best results, the tool should be fed towards the spindle when burnishing diameters and towards the centerline when burnishing faces. (Note: the UBT-B3 tool cannot be used to burnish faces.)

ROLLS FOR UBT-B TOOLS

| ITEM NO. | TOOL TYPE | ROLL TYPE & RADIUS |
|----------------|-----------|-----------------------------------|
| UBT-001 | UBT-B1 | HARDENED STEEL, .060 IN. (1.52MM) |
| UBT-002 | UBT-B1 | CARBIDE, .060 IN. (1.52MM) |
| UBT-003 | UBT-B1 | HARDENED STEEL, .030 IN. (0.76MM) |
| UBT-018 | UBT-B2 | HARDENED STEEL, .060 IN. (1.52MM) |
| UBT-019 | UBT-B2 | CARBIDE, .060 IN. (1.52MM) |
| 6100-708-00312 | UBT-B3 | HARDENED STEEL, .030 IN. (0.76MM) |

Speed and feed recommendations for UBT-B tools

| SPEED | |
|-------|--------|
| SFM | M/MIN. |
| 750 | 230 |

| FEED | |
|-------------|-----------|
| IPR | MM/REV. |
| 0.001/0.006 | 0.02/0.15 |

Lubrication of UBT-B tools

All UBT-B tools should be periodically greased (approximately every 24 hours of operation). We recommend the use of high-quality Lithium complex grease.

KB[®] knurling tools

Salvage out-of-tolerance bores or shafts with the two-step KB[®] Knurling-Burnishing “scrap saver” process.

Worthless scrap or precision part? The KB “Scrap-Saver” process can make the difference.

Cogsdill’s KB process is an innovative approach to making the diameter of holes smaller and the diameter of shafts larger. The KB process was originally developed for automotive parts rebuilding industries, where out-of-tolerance bores and shafts on parts that were formerly scrapped are salvaged with the KB process. The process is also applied in original equipment manufacturing.



Roll-a-Finish tool

KB knurling tool

Note: KB knurling tool shown above without adjusting screw.

The KB process

KB is Superior to Conventional Salvage Methods

Conventional salvage methods, including spray welding and chrome plating, are expensive, time-consuming, and often produce unsatisfactory results. These metal-adding processes do not deposit a uniform thickness around the circumference of the hole or shaft; they also deposit metal where it is not wanted, and remachining is required. Often remachining is difficult because no qualified surfaces are available for alignment.

Another approach is to cut away additional metal and install a bushing or sleeve. Additional time and effort is required for machining and finishing the part to bring it within tolerance.

The KB Process eliminates these problems in two quick steps through the use of two tools. The KB Knurling Tool raises the surface of the oversize bore (or undersize shaft). The Roll-a-

Finish Tool roller burnishes the knurled surface to the exact diameter required. (See below, "How It Works.") The entire two-step process can be accomplished in seconds

Improved surface characteristics and lower cost

In addition to the benefits of Knurling/Burnishing as a sizing and salvage method, the process results in a series of plateaus on the same plane in the surface of the metal, thus providing increased contact area. Tests by a major auto manufacturer have shown increases in surface holding power of up to 35% over surfaces which are precision bored to receive press-fit bearings. In many cases the finished boring process may be eliminated altogether. The grooves in the Knurled/Burnished surface are ideally suited for use with an adhesive

agent. The grooves are also desirable for the effect of trapping and funneling away foreign matter and grit that might otherwise remain on the bearing surface of the part.

For running fits, the increased contact area diminishes the load carried at any given point on the part surface; this increases the ability of the surface to resist wear. Knurling, like Roller Burnishing, is a metal displacement process, and the work-hardening effect of the tools also contributes to the ability of the Knurled/Burnished surface to resist wear.


The KB Process can result in cost savings in several areas. Machine time can be reduced as much as 10:1. Substantial reductions are achieved in tool cost and tool inventory. Fewer machines and less floor space are required.

Knurling and Burnishing makes holding size easier; this results in savings in inspection time and scrap.

How it works



An oversize bore may be machined out-of-tolerance or made oversize by excessive wear. Here's how the KB Process can salvage this part:

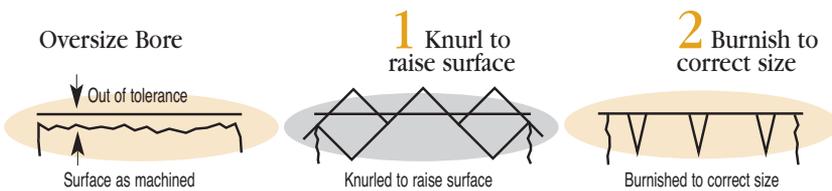

- 2** steps
- 1 — A Cogsdill KB Knurling Tool displaces material on the oversize hole diameter, raising the surface as much as .030 inch (.76mm) in a diamond-shaped knurled pattern. The bore is now undersize.
 - 2 — A Cogsdill Roll-a-Finish Tool cold works the knurled surface, burnishing the hole to correct size.

The KB process

Tool operation

Knurling may be performed with either the tool or the part rotating. Any ductile or malleable metal may be knurled including aluminum, brass, bronze, ductile iron, steels (up to 40 Rc) and cast iron (except chilled and white cast). Speeds should approximate drilling speeds, and feed rate starting points can be determined from the table below.

Although hand-fed operations are possible on many machines, power feeding is desirable to obtain a more uniform knurl pattern. Return feeds

may be two to three times the infeed rate.

The operations should be performed under a flood of coolant. A water soluble, high-lubricity oil is recommended. If coolant cannot be used, speeds and feeds should be reduced by two-thirds to ensure reasonable knurl and pin life.

The tools are adjusted using the adjusting screw located in the center of the tool.

Once the tools are set for size, an unskilled operator can obtain consistently good results, even over long work lengths.

Cogsdill knurling tools do not require accurate location, and in most cases it is recommended to have either the tool or part free to float. Each knurling roll depends on the support of the opposing roll to do its work; therefore, the tools are self-centering.

Typical changes in workpiece diameter, after knurling with medium pitch knurling rolls (20 teeth per circular inch), are as follows: for cast iron, .006 inch (.15mm); for steel, .008 inch (.2mm); for bronze, .010 inch (.25mm); and for aluminum, .012 inch (.30mm).


| MATERIAL | SPEED | | FEED RATE | |
|---|---------|---------|-----------|--------|
| | SFPM | SM/MIN. | IPR | MM/REV |
| Aluminum or brass | 200-300 | 61-91 | .030 | .76 |
| Leaded steel | 125-150 | 38-46 | .030 | .76 |
| Soft cast iron carbon steel | 80-120 | 24-37 | .018 | .46 |
| # 50 cast iron, medium alloy steel | 60-90 | 18-27 | .012 | .30 |
| # 65 cast iron, alloy steel (35-40 R/C) | 25-35 | 8-11 | .008 | .20 |

Knurling rolls

Worn knurling rolls should be replaced in sets. However, if a knurling roll should be damaged, it may be replaced by a new roll of like hand.

KN-1 and KN-2 knurling rolls are available in medium and coarse pitch; KN-3 rolls are available in medium

pitch only. (Medium is 20 teeth per circular inch, and coarse is 14 teeth per circular inch.) Please specify medium or coarse pitch when ordering. Knurling rolls have knurls set at a 45 degree angle. Special angles and pitches are available on special order.

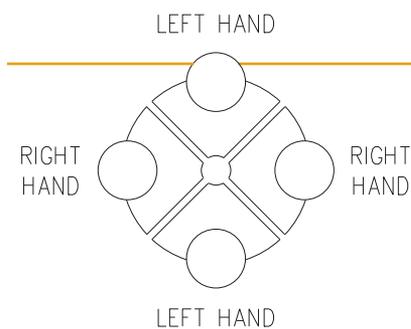

Cogsdill Knurling Tools require an equal number of left and right hand knurling rolls, placed in opposing stations.

Special tools

Special Knurling Tools, including external tools, tools for larger diameters, and fully-bottoming tools, are available on special order. When requesting a quotation for a special tool, please furnish the following data:

1. Part description and part number (if any).
2. A blueprint or sketch of your part.
3. Exactly what job is to be performed; i.e. what particular surface of the part is to be knurled.
4. Material type and hardness.
5. If a salvage job is to be performed, advise how much parts are oversized or undersized.
6. Tolerance requirements.
7. Shank requirements.

Tool design

Cogsdill Knurling Tools are available for internal applications. External tools are available on special order (see “Special Tools”). All internal Knurling Tools are of similar design with differences only in the number of knurling rolls and the diameter adjustment mechanism.

Small tools from KBN-625 through KBN-1156 are adjusted by turning a hex-head screw in the side of the tool. Tools in this range have two rolls.

The larger internal tools are adjusted by means of a hex-head screw through the center of the tool. The screw is accessible from the front of the tool.


Tools from KBN-1188 through KBN-2969 have four knurling rolls, while those from KBN-3000 through KBN-4000 have six knurling rolls.

All internal Knurling Tools are adjustable over a range of .041 inch (1.04mm), as are Cogsdill Roll-a-Finish tools.

The tool consists of shank, rolls, pins and adjusting screw. Morse taper shanks are standard. The rolls and pins are the only items considered wear parts; these are available from stock. We recommend that at least one spare set of rolls and pins is ordered when a knurling tool is purchased. The pins are retained by a set screw and can be easily removed when it is necessary to replace worn rolls.

All tools are designed for through-hole applications. These tools can also be used on semi-bottoming applications; the tool will work to .080 inch (2.03mm) from the bottom of the bore. Bottoming tools are also available, on special order (see “Special Tools”).

knurling
design
tool

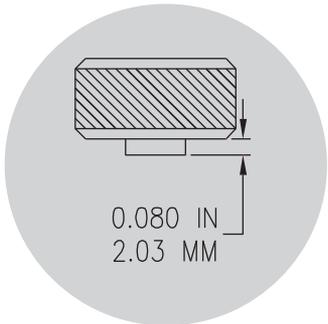

Tool specifications

| Tool No. | Diameter Range | | Shank | Overall Length | | Pins & Knurls | |
|----------|----------------|-------------|-------|----------------|-------|---------------|-----------|
| | Inches | Millimeters | | Inches | MM | Size | Qty. Req. |
| KBN-625 | .621-.662 | 15.77-16.81 | ↑ | ↑ | ↑ | ↑ | ↑ |
| KBN-656 | .652-.693 | 16.56-17.60 | | | | #KN-3 | |
| KBN-688 | .684-.725 | 17.37-18.42 | | | | (.312 Inch | |
| KBN-719 | .715-.756 | 18.16-19.20 | | | | Dia.) | |
| KBN-750 | .746-.787 | 18.95-19.99 | | | | ↑ | |
| KBN-781 | .777-.818 | 19.74-20.78 | | | | | |
| KBN-812 | .808-.849 | 20.52-21.56 | | | | | |
| KBN-844 | .840-.881 | 21.34-22.38 | | | | | |
| KBN-875 | .871-.912 | 22.12-23.16 | | | | | 2 |
| KBN-906 | .902-.943 | 22.91-23.95 | | | | | |
| KBN-938 | .934-.975 | 23.72-24.77 | | | | | |
| KBN-969 | .965-1.006 | 24.51-25.55 | | | | | |
| KBN-1000 | .996-1.037 | 25.30-26.34 | | | | | |
| KBN-1031 | 1.027-1.068 | 26.09-27.13 | | | | | |
| KBN-1062 | 1.058-1.099 | 26.87-27.91 | | | | | |
| KBN-1094 | 1.090-1.131 | 27.69-28.73 | | | | | |
| KBN-1125 | 1.121-1.162 | 28.47-29.51 | #2MT | 6.75 | 171.4 | | |
| KBN-1156 | 1.152-1.193 | 29.26-30.30 | | | | | ↓ |
| KBN-1188 | 1.184-1.225 | 30.07-31.12 | | | | | ↑ |
| KBN-1219 | 1.215-1.256 | 30.86-31.90 | | | | | |
| KBN-1250 | 1.246-1.287 | 31.65-32.69 | | | | | |
| KBN-1281 | 1.277-1.318 | 32.44-33.48 | | | | | |
| KBN-1312 | 1.308-1.349 | 33.22-34.26 | | | | | |
| KBN-1344 | 1.340-1.381 | 30.04-35.08 | | | | #KN-2 | |
| KBN-1375 | 1.371-1.412 | 34.82-35.86 | | | | (.375 Inch | |
| KBN-1406 | 1.402-1.443 | 35.61-36.65 | | | | Dia.) | |
| KBN-1438 | 1.434-1.475 | 36.42-37.47 | | | | | |
| KBN-1469 | 1.465-1.506 | 37.21-38.25 | | | | | |
| KBN-1500 | 1.496-1.537 | 38.00-39.04 | | | | | |
| KBN-1531 | 1.527-1.568 | 38.79-39.83 | | | | | |
| KBN-1562 | 1.558-1.599 | 39.57-40.61 | | | | | 4 |
| KBN-1594 | 1.590-1.631 | 40.39-41.43 | | | | | |
| KBN-1625 | 1.621-1.662 | 41.17-42.21 | | | | | |
| KBN-1656 | 1.652-1.693 | 41.96-43.00 | ↓ | ↓ | ↓ | | |
| KBN-1688 | 1.684-1.725 | 42.77-43.82 | ↑ | ↑ | ↑ | | |
| KBN-1719 | 1.715-1.756 | 43.56-44.60 | | | | | |
| KBN-1750 | 1.746-1.787 | 44.35-45.39 | | | | | |
| KBN-1781 | 1.777-1.818 | 45.14-46.18 | | | | | |
| KBN-1812 | 1.808-18.49 | 45.92-46.96 | | | | | |
| KBN-1844 | 1.840-1.881 | 46.74-47.78 | | | | ↓ | |
| KBN-1875 | 1.871-1.912 | 47.52-48.56 | | | | ↑ | |
| KBN-1906 | 1.902-1.943 | 48.31-49.35 | | | | | |
| KBN-1938 | 1.934-1.975 | 49.12-50.17 | | | | | |
| KBN-1969 | 1.965-2.006 | 49.91-50.95 | #3MT | 7.75 | 196.8 | | |
| KBN-2000 | 1.996-2.037 | 50.70-51.74 | | | | | |
| KBN-2031 | 2.027-2.068 | 51.49-52.53 | | | | | |
| KBN-2062 | 2.058-2.099 | 52.27-53.31 | | | | #KN-1 | |
| KBN-2094 | 2.090-2.131 | 53.09-54.13 | | | | (.750 Inch | |
| KBN-2125 | 2.121-2.162 | 53.87-54.91 | | | | Dia.) | |
| KBN-2156 | 2.152-2.193 | 54.66-55.70 | | | | | |
| KBN-2188 | 2.184-2.225 | 55.47-56.52 | | | | | |
| KBN-2219 | 2.215-2.256 | 56.26-57.30 | | | | | |
| KBN-2250 | 2.246-2.287 | 57.05-58.09 | | | | | |
| KBN-2281 | 2.277-2.318 | 57.84-58.88 | | | | | |
| KBN-2312 | 2.308-2.349 | 58.62-59.66 | ↓ | ↓ | ↓ | ↓ | ↓ |

Tool specifications

| Tool No. | Diameter Range | | Shank | Overall Length | | Pins & Knurls | |
|----------|----------------|---------------|-------|----------------|-------|---------------|-----------|
| | Inches | Millimeters | | Inches | MM | Size | Qty. Req. |
| KBN-2344 | 2.340-2.381 | 59.44-60.48 | ↑ | ↑ | ↑ | ↑ | ↑ |
| KBN-2375 | 2.371-2.412 | 60.22-61.26 | | | | | |
| KBN-2406 | 2.402-2.443 | 61.01-62.05 | | | | | |
| KBN-2438 | 2.434-2.475 | 61.82-62.87 | | | | | |
| KBN-2469 | 2.465-2.506 | 62.61-63.65 | | | | | |
| KBN-2500 | 2.496-2.537 | 63.40-64.44 | | | | | |
| KBN-2531 | 2.527-2.568 | 64.19-65.23 | | | | | |
| KBN-2562 | 2.558-2.599 | 64.97-66.01 | | | | | |
| KBN-2594 | 2.590-2.631 | 65.79-66.83 | | | | | |
| KBN-2625 | 2.621-2.662 | 66.57-67.61 | #3MT | 7.75 | 196.8 | | 4 |
| KBN-2656 | 2.652-2.693 | 67.36-68.40 | | | | | |
| KBN-2688 | 2.684-2.725 | 68.17-69.22 | | | | | |
| KBN-2719 | 2.715-2.715 | 68.96-70.00 | | | | | |
| KBN-2750 | 2.746-2.787 | 69.75-70.79 | | | | | |
| KBN-2781 | 2.777-2.818 | 70.54-71.58 | | | | | |
| KBN-2812 | 2.808-2.849 | 71.32-72.36 | | | | | |
| KBN-2844 | 2.840-2.881 | 72.14-73.18 | | | | | |
| KBN-2875 | 2.871-2.912 | 71.92-73.96 | | | | | |
| KBN-2906 | 2.902-2.943 | 73.71-74.75 | | | | | |
| KBN-2938 | 2.934-2.975 | 74.52-75.57 | | | | | |
| KBN-2969 | 2.965-3.006 | 75.31-76.35 | ↓ | ↓ | ↓ | | ↓ |
| KBN-3000 | 2.996-3.037 | 76.10-77.14 | ↑ | ↑ | ↑ | | ↑ |
| KBN-3031 | 3.027-3.068 | 76.89-77.93 | | | | | |
| KBN-3062 | 3.058-3.099 | 77.67-78.71 | | | | | |
| KBN-3094 | 3.090-3.131 | 78.49-79.53 | | | | | |
| KBN-3125 | 3.121-3.162 | 79.27-80.31 | | | | | |
| KBN-3156 | 3.152-3.193 | 80.06-81.10 | | | | | |
| KBN-3188 | 3.184-3.225 | 80.87-81.92 | | | | | |
| KBN-3219 | 3.215-3.256 | 81.66-82.70 | | | | #KN-1 | |
| KBN-3250 | 3.246-3.287 | 82.45-83.49 | | | | (.750 Inch | |
| KBN-3281 | 3.277-3.318 | 83.24-84.28 | | | | Dia.) | |
| KBN-3312 | 3.308-3.349 | 84.02-85.06 | | | | | |
| KBN-3344 | 3.340-3.381 | 84.84-85.88 | | | | | |
| KBN-3375 | 3.371-3.412 | 85.62-86.66 | | | | | |
| KBN-3406 | 3.402-3.443 | 86.41-87.45 | | | | | |
| KBN-3438 | 3.434-3.475 | 87.22-88.27 | | | | | |
| KBN-3469 | 3.465-3.506 | 88.01-89.05 | #4MT | 8.75 | 222.2 | | 6 |
| KBN-3500 | 3.496-3.537 | 88.80-89.84 | | | | | |
| KBN-3531 | 3.527-3.568 | 89.59-90.63 | | | | | |
| KBN-3562 | 3.558-3.599 | 90.37-91.41 | | | | | |
| KBN-3594 | 3.590-3.631 | 91.19-92.23 | | | | | |
| KBN-3625 | 3.621-3.662 | 91.97-93.01 | | | | | |
| KBN-3656 | 3.652-3.693 | 92.73-93.80 | | | | | |
| KBN-3688 | 3.684-3.725 | 93.57-94.62 | | | | | |
| KBN-3719 | 3.715-3.756 | 94.36-95.40 | | | | | |
| KBN-3750 | 3.746-3.787 | 95.15-96.19 | | | | | |
| KBN-3781 | 3.777-3.818 | 95.94-96.98 | | | | | |
| KBN-3812 | 3.808-3.849 | 96.72-97.76 | | | | | |
| KBN-3844 | 3.840-3.881 | 97.54-98.58 | | | | | |
| KBN-3875 | 3.871-3.912 | 98.32-99.36 | | | | | |
| KBN-3906 | 3.902-3.943 | 99.11-100.15 | | | | | |
| KBN-3938 | 3.934-3.975 | 99.92-100.97 | | | | | |
| KBN-3969 | 3.965-4.006 | 100.71-100.97 | | | | | |
| KBN-4000 | 3.996-4.037 | 101.50-102.54 | | | | | |
| | | | ↓ | ↓ | ↓ | ↓ | ↓ |



COGSDILL-NUNEATON Ltd.

Application data sheet Roller burnishing tools

PLEASE PHOTOCOPY & COMPLETE THIS FORM & ENCLOSE WITH YOUR ORDER OR REQUEST FOR QUOTATION. THE DATA WILL BE USED TO ENSURE THAT THE CORRECT TOOL IS FURNISHED FOR YOUR PARTICULAR APPLICATION.

CUSTOMER _____ DATE _____

ADDRESS _____

CITY _____ COUNTY _____ POSTAL CODE _____

CONTACT _____ TELEPHONE _____

FAX _____ E-MAIL ADDRESS _____

TITLE _____

SALES AGENT _____ SALESMAN _____

CUSTOMER'S PART _____

PRINTS INCLUDED YES _____ NO _____ LATER _____

PRIMARY OBJECTIVE SIZE _____ FINISH _____ OTHER _____

THROUGH-HOLE OR BLIND BORE? _____

FINISH DIAMETER(S) _____ TOLERANCE(S) _____

SURFACE FINISH REQUIRED _____ in Ra

WHAT IS THE OPERATION PRIOR TO BURNISHING? _____

PRESIZE(S) _____ TOLERANCE(S) _____

PREFINISH _____ in Ra

LENGTH OF BURNISH _____ MATERIAL _____

MATERIAL CONDITION (HARDNESS OR TENSILE STRENGTH) _____

TYPE OF MACHINE TO BE USED _____ TYPE SHANK _____

EXTERNAL OR INTERNAL COOLANT? _____

IS THE TOOL TO BE RUN HORIZONTALLY OR VERTICALLY? _____

AUTOMATIC TOOL CHANGER? YES _____ NO _____

WEIGHT RESTRICTION _____

TOOL LENGTH RESTRICTION _____

ARE THERE RESTRICTIONS ON DIAMETER OR LENGTH? (FIXTURE INTERFERENCE, SHOULDER, GROOVE, KEYWAY, ETC.)

PRODUCTION REQUIREMENT _____

ADDITIONAL COMMENTS _____

Fax or mail to:

FAX 024 76344433

Cogsdill-Nuneaton Ltd.

Tenlons Road

Nuneaton, England

ATTN: CUSTOMER SERVICE

IMPORTANT
PART PRINT OR
DETAILED SKETCH
MUST BE SUPPLIED.

Notes

Notes